

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 700LM 830 36 SL

0029122



### Product features

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp
- Recreates backlight effect similar to halogen dichroic lamps
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- COOLFIT functionality - ensures overheat and over temperature protection
- High switching cycles: >100,000
- High colour rendering: CRI80
- Non dimmable
- Warranty: 5 Years



## PRODUCT OVERVIEW

Product name	RefLED Superia Retro ES50 V3 700LM 830 36 SL
Technology	LED
Watt (Rated) (W)	7.3
Cap/Base	GU10
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
ETIM Class	EC001959
E-number FI	4741051
Warranty	5 years
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	7.3
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288291222

## DATA TABLE

### General data

Product name	RefLED Superia Retro ES50 V3 700LM 830 36 SL
Technology	LED
Watt (Rated) (W)	7.3
Cap/Base	GU10
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 700LM 830 36 SL

0029122

Operating temperature range (°C)	-20°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741051
Warranty	5 years

### Optical data

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	1300
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	7.3
Equivalent watt (W)	95
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	7.4
Inrush Duration (µs)	270
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	97
Max. products per 16A B Breaker	58

### Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

### Physical data

Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.05

### Packaging

Single packaging type	Carton
Product EAN number	5410288291222
Packaging single length / height (cm)	8.2

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 700LM 830 36 SL


0029122

Packaging single width (cm)	6.1
Packaging single depth (cm)	5.1
DUN14 (inner)	25410288291226
Units per inner package	6
Packaging inner length / height (cm)	9.2
Packaging inner width (cm)	16.4
Packaging inner depth (cm)	13.1
DUN14 (outer)	15410288291229
Units per outer package	60
Packaging outer length / height (cm)	20.8
Packaging outer width (cm)	17.8
Packaging outer depth (cm)	68.5


### Safety data

Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	None

## PHOTOMETRY

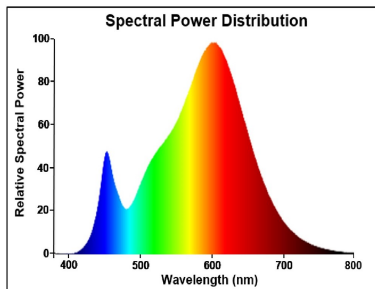

## TECHNICAL DRAWINGS




## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 700LM 830 36 SL  
0029122



SYLVANIA

0029122

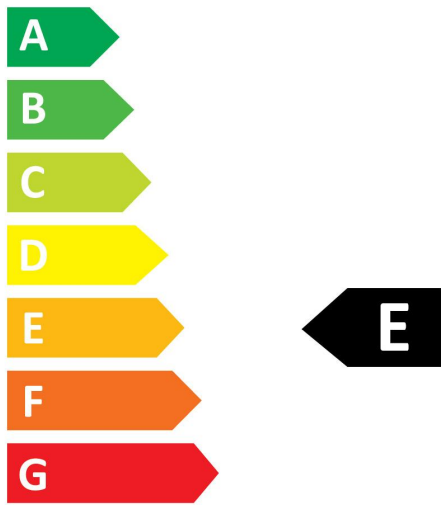

**8**  
kWh/1000h



2019/2015


# SYLVANIA

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 700LM 830 36 SL  
0029122



0029122

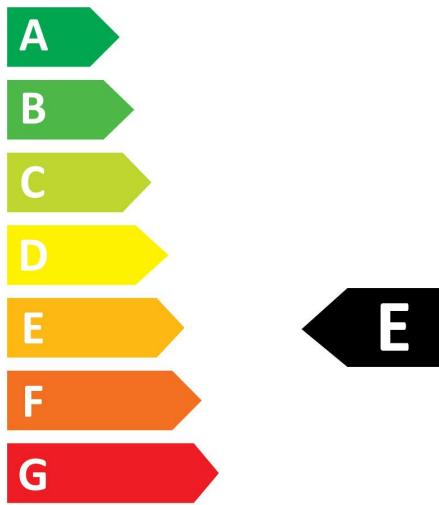

**8**  
kWh/1000h



2019/2015