

# ERGO 1044A-L4105K-02

Solar Wall Bracket ERGO IP65 LED SMD 4.50W 435lm/445lm CRI80  
3000K/4000K 90° Twilight Black

Dopo Lighting introduces the family ERGO, consisting of solar wall lamp and solar bollard in heights 380mm and 680mm. It has LED technology and an IP65 in its black finish. Its colour temperatures can be 3000K or 4000K. Charging time is 6/8 hours and has a durability of up to 12 hours on a full charge. Ideal for gardens, residential projects or outdoor events.



## GENERAL DATA


Category	Surface
Family	Ergo
Finish	02  Black
Location	Outdoor
Installation	Wall
Body material	Aluminum
Diffuser material	Opal polycarbonate
EAN	8433264353148

## LIGHT SOURCES AND BEAMS

Sources	LED SMD 4.5W 435lm/445lm 3000K/4000K CRI80
Total flux	250 lm
Energy efficiency	F (3000K, 4000K)
Beam	90° - Rotosimétrica

## TECHNICAL DATA

Dimensions	Diameter x Length x Height (mm): 240 x 300 x 320
IP	IP65
IK	08
Protection class	Class III
Input voltage	3.2V DC V
Sensors	Twilight
Rechargeable	Solar
Battery charge time	8.0 h
Battery autonomy	12.0 h
Operating temperature range	-15 - 50 °C
Lifetime	35,000 h
LED lifetime L	80
LED lifetime B	20

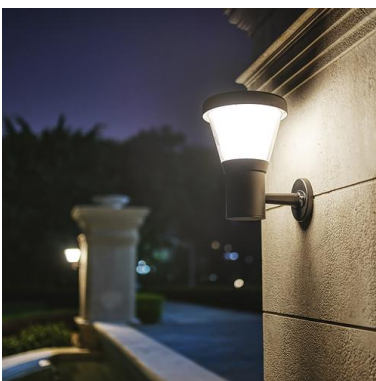

## NOTES

Full load duration: 12h  
Loading time: 6/8h  
Amplitud térmica: -15/50 °C  
Nivel sensor: 25lux

**ERGO**

1044A-L4105K-02

Solar Wall Bracket ERGO IP65 LED SMD 4.50W 435lm/445lm CRI80  
3000K/4000K 90° Twilight Black

**COMPLEMENTARY IMAGES**



< 25 lux			100%
			80%
			60%
			40%
			30%

Tiempo de carga: 6/8h  
Duración carga completa: Hasta 12h  
Loading time: 6/8h  
Full load duration: Up to 12h  
Temps de chargement: 6/8hrs  
Durée pleine charge: jusqu'à 12h

**PRODUCTS OF THE SAME FAMILY**



Ergo H380



Ergo H680