

SINCE 1978



Product Datasheet


LEADING LIGHT

vkleadinglight.gr

Iris

VK/02300/PE/D/W-B/W


Sand White/Black. 3000K. 3x5W. 3x394lm. 20° + 35° + 20°. Up/Down. AC200-240V. DC30-40V 300mA. Led Bridgelux. Ceiling/pendant. < 45°C. 50.000hrs. Dimmable Yes, Triac. CRI>90. Aluminum. IP20

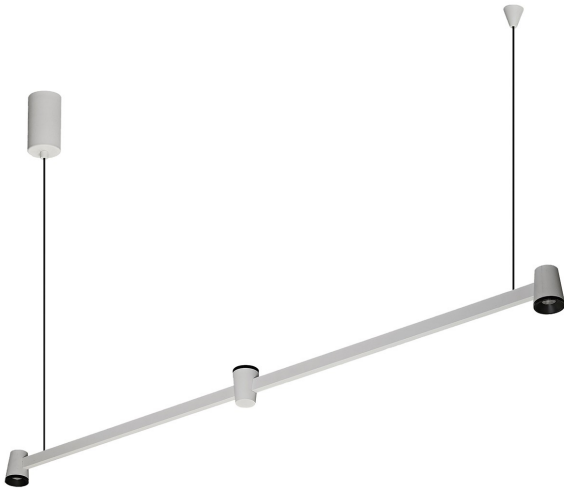



IP20



Dimensions

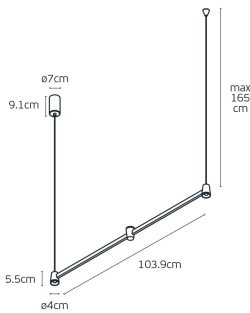

Gallery

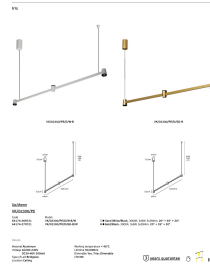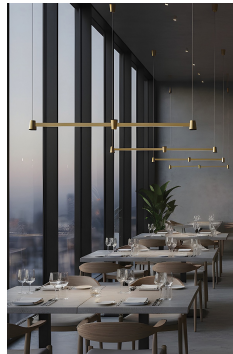



Downloads




VK Leading Light

Since 1978

Technical Specifications	
Kelvin	3000K
Power	15W (3x5W)
Voltage	AC200-240V
Extra	AOHUA Triac Dimming (D111)12-24W AC:200-240V, DC:30-40V,300mA
Fitting	Pendant
Type	Light
Safety class	
Light source	Bridgelux
IP Rating	IP20
CRI	CRI>90
Dimmable	
Lifetime	50.000hrs
Cable Length	165cm (max)
Working temperature	<45°C
PAGE	62 New Products 2026
NICKNAME	Iris

Physical Specifications	
Family	Iris
Color	Sand white/Black
Material	Aluminum
Width	ø4cm
Length	103.9cm
Height	5.5cm (+165cm of cable)

Illumination Data	
Lumen	1182lm (3x394lm)
Beam angle	20° + 35° + 20°
Lighting direction	

Packing Info

Pcs/carton	8pcs
------------	------

Certification & Warranty

Guarantee	3 years
-----------	---------

Energy Label

ENERGY

VK LEADING LIGHT
VK/02300/PE/D/W-B/W

A
B
C
D
E
F
G

4 kWh/1000h

2019/2015