

SINCE 1978




LEADING LIGHT

# Product Datasheet

vkleadinglight.gr

Iris

## VK/02300/PE/D/GD-B/W

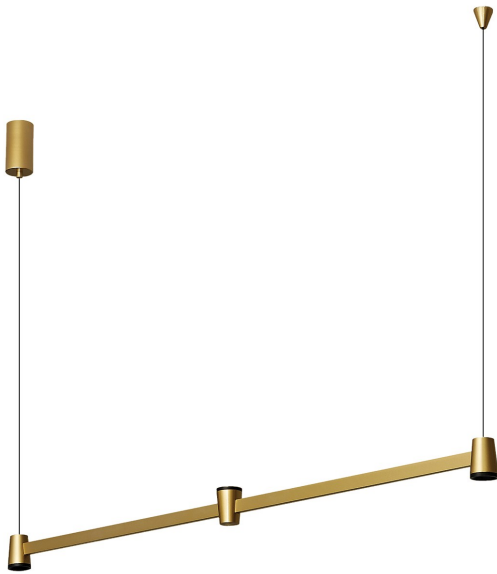


Gold/Black. 3000K. 3x5W. 3x394lm. 20° + 35° + 20°. 3x5W. 3x394lm. 20° + 35° + 20°. Up/Down. AC200-240V. DC30-40V 300mA. Led Bridgelux. Ceiling/pendant. < 45°C. 50.000hrs. Dimmable Yes, Triac. CRI>90. Aluminum. IP20


IP20



### Dimensions

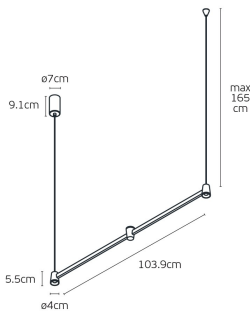

### Gallery

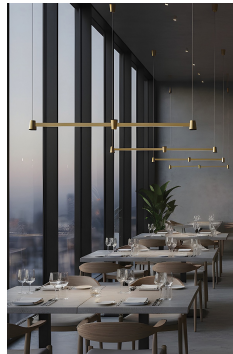



Model: VK/02300/PE/D/GD-B/W  
Material: Aluminum  
Finish: Gold/Black  
Light Source: LED  
Power: 15W  
Voltage: AC200-240V  
Frequency: 50/60Hz  
Dimmable: Yes (Triac)  
CRI: >90  
Temperature: <45°C  
Lifespan: 50,000hrs  
IP: IP20

### Downloads




VK Leading Light

Since 1978

Technical Specifications	
Kelvin	3000K
Power	15W (3x5W)
Voltage	AC200-240V
Extra	AOHUA Triac Dimming (D111)12-24W AC:200-240V, DC:30-40V,300mA
Fitting	Pendant
Type	Light
Safety class	
Light source	Bridgelux
IP Rating	<b>IP20</b>
CRI	CRI>90
Dimmable	
Lifetime	50.000hrs
Cable Length	165cm (max)
Working temperature	<45°C
PAGE	62 New Products 2026
NICKNAME	Iris

Physical Specifications	
Family	Iris
Color	Gold/Black
Material	Aluminum
Width	ø4cm
Length	103.9cm
Height	5.5cm (+165cm of cable)

Illumination Data	
Lumen	1182lm (3x394lm)
Beam angle	20° + 35° + 20°
Lighting direction	

Packing Info

Pcs/carton	8pcs
------------	------

Certification & Warranty

Guarantee	3 years
-----------	---------

Energy Label

**ENERGY**

VK LEADING LIGHT  
VK/02300/PE/D/GD-B/W

A  
B  
C  
D  
E  
**F**  
G

4 kWh/1000h

2019/2015