

SINCE 1978



LEADING LIGHT

Product Datasheet

vkleadinglight.gr

Aura

VK/04692/RGD/W




Rose Gold. 3000K. 2x10W. 2096lm. AC220-240V. 70°. LED Bridgelux COB. Adaptor Hopestar. Floor light. -20°C → 45°C. 50.000hrs. Clicks 20.000. Foot Dimming. CRI>90. H156.7cm. Aluminum+glass. IP20


IP20



Dimensions

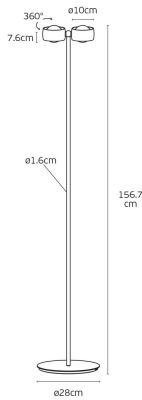


Gallery





NOTES: 1. The lamp is designed for use in a living room. 2. The lamp is not suitable for use in a kitchen. 3. The lamp is not suitable for use in a bathroom. 4. The lamp is not suitable for use in a bedroom. 5. The lamp is not suitable for use in a hallway. 6. The lamp is not suitable for use in a living room. 7. The lamp is not suitable for use in a living room. 8. The lamp is not suitable for use in a living room. 9. The lamp is not suitable for use in a living room. 10. The lamp is not suitable for use in a living room.


Downloads




VK Leading Light

Since 1978

Technical Specifications	
Kelvin	3000K
Power	20W (2x10W)
Voltage	AC220-240V
Fitting	Floor
Type	Light
Safety class	
Light source	Bridgelux COB
IP Rating	IP20
CRI	CRI>90
Dimmable	
Lifetime	50.000hrs
Clicks	20,000
Driver	Adaptor Hopestar
Working temperature	-20°C-45°C
PAGE	80 New Products 2026
NICKNAME	Aura

Physical Specifications	
Adjustable	
Rotation	360°
Family	Aura
Color	Rose Gold
Material	Aluminum+Glass
Width	ø28cm
Length	21.6cm
Height	156.7cm (7.6cm body of light)
Net weight of product (kg)	8.03kg
Gross weight with inner box (kg)	8.93kg
Width (inner box)	34cm, (2nd box 0.3cm)
Length (inner box)	45.8cm, (2nd box 3cm)
Height (inner box)	13.5cm, (2nd box 159cm)

Illumination Data	
Lumen	2096lm
Beam angle	70°
Lighting direction	

Packing Info	
Pcs/carton	1pc

Certification & Warranty	
Guarantee	2 years