


LOO 183A-L0206A-30 Recessed floor LOO IP67 LED SMD 6.50W 825lm CRI80 4000K 100° Stainless steel

Loo recessed floor, made of aluminum in a round shape with a degree of protection IP67. The embedment depth is 10cm with the emission temperature of 4000K. It is made to illuminate the pathways of outdoor residential or commercial spaces.

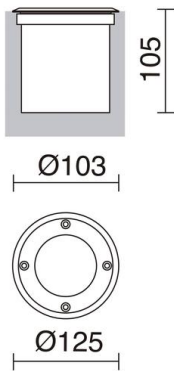

GENERAL DATA

Category	Recessed
Family	Loo
Finish	[30] Stainless steel
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Transparent glass
Frame material	Inox aisi 304
ETIM class	EC000758
EAN	8435256535310

LIGHT SOURCES AND BEAMS

Sources	LED SMD 6,5W max. 825lm 4000K CRI80
Total flux	565 lm
Energy efficiency	E
Beam	100° - Indirect symmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 125 x 125 x 105
IP	IP67
Static pressure	500.0 Kg
Protection class	Class II
Frequency	50/60 Hz
Input voltage	110-240V AC V
Total wattage	8 W
Auxiliary gear	Without equipment, not needed
Surface temperature	60.0 °C
Lifetime	27.000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.841667 Kg
Cable outlets	2
Cut hole box included	Yes
Cut hole dimensions	Diameter x Depth (mm): 115 x 105
ECORAE category I	LED-B
ECORAE I	0.5
Periodic maintenance	Yes
Flammable surfaces	Yes