


SOFITO 290A-L0210H-30 Recessed ceiling SOFITO IP67 LED COB 9W 1215lm CRI80 4000K 40°
Stainless steel

Sofito recessed ceiling, made of aluminum with a degree of protection IP67. The embedment depth is 10cm with the emission temperature of 4000K. It is suitable for lighting outdoor residential areas.

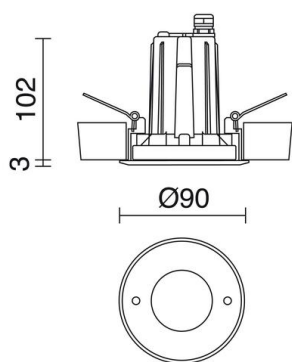

GENERAL DATA

| | |
|-------------------|----------------------|
| Category | Recessed |
| Family | Sofito |
| Finish | [30] Stainless steel |
| Location | Outdoor |
| Installation | Ceiling |
| Body material | Aluminum |
| Diffuser material | Transparent glass |
| Frame material | Inox aisi 316L |
| ETIM class | EC001744 |
| EAN | 8435256599428 |

LIGHT SOURCES AND BEAMS

| | |
|-------------------|------------------------------------|
| Sources | LED COB 9W max. 1215lm 4000K CRI80 |
| Energy efficiency | E |
| Beam | 40° - Direct symmetric |

TECHNICAL DATA

| | |
|----------------------|---------------------------------|
| Dimensions | Height x Diameter (mm): 3 x 90 |
| IP | IP67 |
| Corrosion resistance | Yes |
| Protection class | Class III |
| Auxiliary gear | Without equipment, needed |
| Lifetime | 30.000 h |
| LED lifetime L | 80 |
| LED lifetime B | 20 |
| Weight | 0.55 Kg |
| Cable outlets | 1 |
| Cut hole dimensions | Diameter x Depth (mm): 86 x 102 |
| ECORAE category I | LED-A |
| ECORAE I | 0.25 |
| Periodic maintenance | Yes |

NOTES

High efficiency specular optics.

SOFITO

 290A-L0210H-30 Recessed ceiling SOFITO IP67 LED COB 9W 1215lm CRI80 4000K 40°
Stainless steel**RECOMMENDED ACCESSORIES****B02A-X3320I-01**

Power supplies ALIMENTADORES

White

Input voltage 110-240V AC

Frequency 50/60

Output current (mA) 500

Wattage (W) 20.0

IP IP20

SOFITO 290A-L0210H-30 Recessed ceiling SOFITO IP67 LED COB 9W 1215lm CRI80 4000K 40°
Stainless steel

PRODUCTS OF THE SAME FAMILY



Sofito D135



Sofito D245



Sofito D90 Retrofit