


SPARK 294C-L3118B-04

Spotlights / Base Spotlight / Spike SPARK IP65 LED SMD AC 17.60W
2125lm CRI80 3000K 80° 90° Anthracite

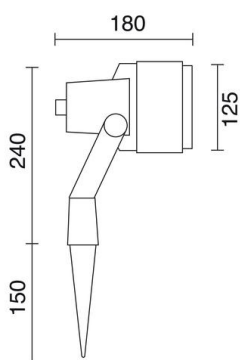

La familia de proyectores Spark está fabricada de aluminio y cuenta con IP54 y IP65 para instalaciones sobre la pared, suelo y techo. Está disponible en varias temperaturas de color 3000K y 4000K y su ángulo de rotación máx. es 355°, incluye la rejilla antideslumbrante. Esta luminaria está hecha para iluminar las zonas exteriores.

GENERAL DATA


Category	Spotlights
Family	Spark
Finish	[04] Anthracite
Location	Outdoor
Installation	Ceiling, Floor, Wall
Body material	Aluminum
Diffuser material	Transparent glass
Reflector material	Aluminum
ETIM class	EC001744
EAN	8433264106416

LIGHT SOURCES AND BEAMS

Sources	LED SMD AC 17.6W max. 2125lm 3000K CRI80
Total flux	1471 lm
Energy efficiency	E
Beam	80° - Directa

TECHNICAL DATA

Dimensions	Length x Height x Width (mm): 180 x 390 x 180
IP	IP65
IP2	IP44
Corrosion resistance	Yes
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Glow wire temperature	850.0 °C
Lifetime	50.000 h
LED lifetime L	80
LED lifetime B	20
Weight	1.6 Kg
Cable outlets	1
Lead wire length	2,500.0 mm
Tilt angle	90.0 °
Rotation angle	355.0 °
ECORAE category I	LED-B
ECORAE I	0.5
Flammable surfaces	Yes

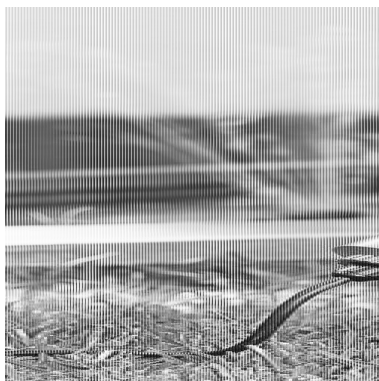

SPARK 294C-L3118B-04 Spotlights / Base Spotlight / Spike SPARK IP65 LED SMD AC 17.60W
2125lm CRI80 3000K 80° 90° Anthracite

PRODUCTS OF THE SAME FAMILY



Spark Grid