


# SPARK 294D-G05X1A-04 Spotlights / Base Spotlight / Spike SPARK IP65 E27 75W 90° Anthracite

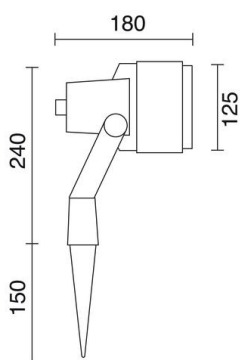

La familia de proyectores Spark está fabricada de aluminio y cuenta con IP54 y IP65 para instalaciones sobre la pared, suelo y techo. Está disponible en varias temperaturas de color 3000K y 4000K y su ángulo de rotación máx. es 355°, incluye la rejilla antideslumbrante. Esta luminaria está hecha para iluminar las zonas exteriores.

### GENERAL DATA

Category	Spotlights
Family	Spark
Finish	[04] Anthracite
Location	Outdoor
Installation	Ceiling, Floor, Wall
Body material	Aluminum
Diffuser material	Transparent glass
ETIM class	EC001744
EAN	8435256510195

### LIGHT SOURCES AND BEAMS


Sources	E27 PAR30 75W max.
Lamp included	No
Beam	Directa

### TECHNICAL DATA

Dimensions	Length x Height x Width (mm): 125 x 390 x 180
IP	IP65
IP2	IP44
Corrosion resistance	Yes
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Auxiliary gear	Without equipment, not needed
Glow wire temperature	850.0 °C
Weight	1.6 Kg
Cable outlets	1
Lead wire length	2,500.0 mm
Tilt angle	90.0 °
Rotation angle	355.0 °
ECORAAE category I	CAT-B
ECORAAE I	0.5
Flammable surfaces	Yes


### NOTES

With anti-dazzle grille Included.

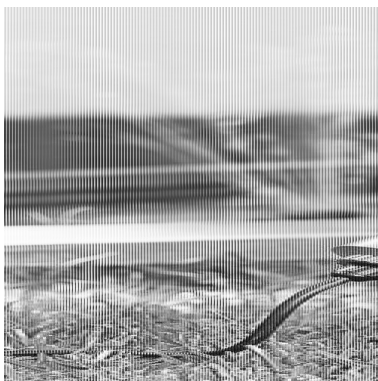


**SPARK** 294D-G05X1A-04 Spotlights / Base Spotlight / Spike SPARK IP65 E27 75W 90° Anthracite

**RECOMMENDED ACCESSORIES**



**632C-L0506B-01**  
Lamp LED FILAMENT E27 LED  
Bulb 6W 800lm CRI80 2700K 360°

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	6.0
IP	IP20
Protection class	Class I



**632C-L0506B-02**  
Lamp LED FILAMENT E27 LED  
Bulb 6W 800lm 4000K 360°

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	6.0
IP	IP20
Protection class	Class I

# SPARK

 294D-G05X1A-04 Spotlights / Base Spotlight / Spike SPARK IP65 E27 75W 90° Anthracite

**PRODUCTS OF THE SAME FAMILY**

---



Spark No grid