


# SPARK 294D-L3318B-04

Spotlights / Base Spotlight / Spike SPARK IP65 LED SMD AC 17.60W  
2270lm CRI80 4000K 80° 90° Anthracite

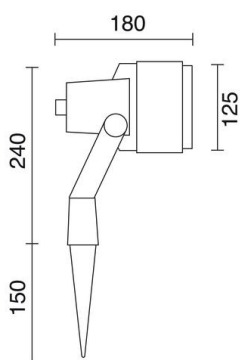

La familia de proyectores Spark está fabricada de aluminio y cuenta con IP54 y IP65 para instalaciones sobre la pared, suelo y techo. Está disponible en varias temperaturas de color 3000K y 4000K y su ángulo de rotación máx. es 355°, incluye la rejilla antideslumbrante. Esta luminaria está hecha para iluminar las zonas exteriores.

### GENERAL DATA

Category	Spotlights
Family	Spark
Finish	[04] Anthracite
Location	Outdoor
Installation	Ceiling, Floor, Wall
Body material	Aluminum
Diffuser material	Transparent glass
Reflector material	Aluminum
ETIM class	EC001744
EAN	8433264106447

### LIGHT SOURCES AND BEAMS


Sources	LED SMD AC 17.6W max. 2270lm 4000K CRI80
Total flux	2125 lm
Energy efficiency	E
Beam	80° - Directa

### TECHNICAL DATA

Dimensions	Length x Height x Width (mm): 125 x 390 x 180
IP	IP65
IP2	IP44
Corrosion resistance	Yes
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Glow wire temperature	850.0 °C
Lifetime	50.000 h
LED lifetime L	80
LED lifetime B	20
Weight	1.6 Kg
Cable outlets	1
Lead wire length	2,500.0 mm
Tilt angle	90.0 °
Rotation angle	355.0 °
ECORAE category I	LED-B
ECORAE I	0.5
Flammable surfaces	Yes

### NOTES

With anti-dazzle grille Included.

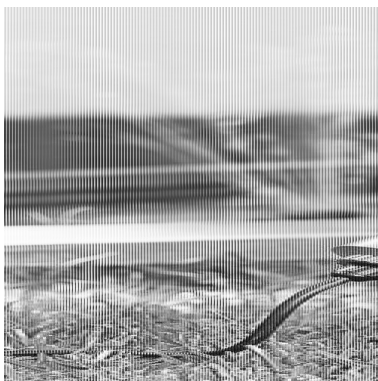

**SPARK** 294D-L3318B-04 Spotlights / Base Spotlight / Spike SPARK IP65 LED SMD AC 17.60W  
2270lm CRI80 4000K 80° 90° Anthracite

**PRODUCTS OF THE SAME FAMILY**

---



Spark No grid