


SYNA 305A-L9804H-30

Wall recessed SYNA IP68 LED SMD 3W CRI80 3000K up-down Stainless steel

Empotrables de pared Syna, fabricados de tecnopolímero con un grado de protección IP68, disponibles en dos tipos de luz SMD y SMD azul, además tienen la versión de emisión Up-Down. La profundidad de empotramiento es de 5cm. Son empotrables diseñados para iluminar las zonas exteriores.

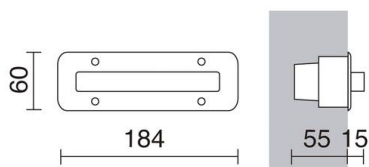

GENERAL DATA

Category	Recessed
Family	Syna
Finish	[30] Stainless steel
Location	Outdoor
Installation	Wall
Body material	Technopolymer
Diffuser material	Transparent polycarbonate
Frame material	Inox aisi 304
ETIM class	EC000481
EAN	8435258622209

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 3000K CRI80 BLUE
Energy efficiency	G
Beams	Direct symmetric Indirect symmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 60 x 184 x 70
IP	IP68
IK	08
Protection class	Class III
Auxiliary gear	Without equipment, needed
Surface temperature	55.0 °C
Lifetime	50.000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.35 Kg
Cable outlets	2
Cut hole box included	Yes
Cut hole dimensions	Length x Width x Depth (mm): 117 x 56 x 55
ECORAE category I	LED-A
ECORAE I	0.25
Periodic maintenance	Yes
Flammable surfaces	Yes

SYNA

 305A-L9804H-30 Wall recessed SYNA IP68 LED SMD 3W CRI80 3000K up-down Stainless steel**RECOMMENDED ACCESSORIES****B02A-X3317H-01**

Power supplies ALIMENTADORES

White


Input voltage	110-240V AC
Frequency	50/60
Output current (mA)	350
Wattage (W)	17.0
IP	IP20
Protection class	Class II

SYNA 305A-L9804H-30 Wall recessed SYNA IP68 LED SMD 3W CRI80 3000K up-down Stainless steel

PRODUCTS OF THE SAME FAMILY



Syna W



Syna W B



Syna W W