
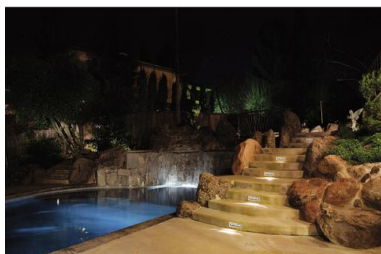


# SYNA 305C-L0102F-30

Wall recessed SYNA IP68 LED SMD 1W CRI80 3500K Stainless steel

Empotrables de pared Syna, fabricados de tecnopolímero con un grado de protección IP68, disponibles en dos tipos de luz SMD y SMD azul, además tienen la versión de emisión Up-Down. La profundidad de empotramiento es de 5cm. Son empotrables diseñados para iluminar las zonas exteriores.

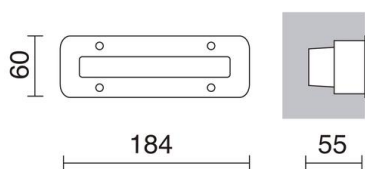

## GENERAL DATA

Category	Recessed
Family	Syna
Finish	[30] Stainless steel
Location	Outdoor
Installation	Wall
Body material	Technopolymer
Diffuser material	Transparent polycarbonate
Frame material	Inox aisi 304
ETIM class	EC000481
EAN	8435258612033

## LIGHT SOURCES AND BEAMS

Sources	LED SMD 1W max. 3500K CRI80
Energy efficiency	D
Beam	Direct symmetric

## TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 60 x 184 x 55
IP	IP68
IK	08
Static pressure	1,000.0 Kg
Protection class	Class III
Input voltage	24V DC V
Auxiliary gear	Without equipment, needed
Surface temperature	55.0 °C
Lifetime	50,000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.35 Kg
Cable outlets	2
Cut hole box included	Yes
Cut hole dimensions	Length x Width x Depth (mm): 117 x 56 x 55
ECORAE category I	LED-A
ECORAE I	0.25
Periodic maintenance	Yes
Flammable surfaces	Yes

**SYNA** 305C-L0102F-30

Wall recessed SYNA IP68 LED SMD 1W CRI80 3500K Stainless steel

**RECOMMENDED ACCESSORIES**



**B02A-X33X2F-01**  
Power supplies ALIMENTADORES  
White

Input voltage	220-240V AC
Frequency	50
Wattage (W)	15.0
IP	IP20
Protection class	Class II



**B02Q-X3312F-01**  
Power supplies ALIMENTADORES  
White

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	12.0
IP	IP42
Protection class	Class II

# SYNA 305C-L0102F-30


Wall recessed SYNA IP68 LED SMD 1W CRI80 3500K Stainless steel

## PRODUCTS OF THE SAME FAMILY


---



Syna W



Syna W B



Syna W Up-down