


ESTAMBUL 410A-G21X1A-34

Recessed floor ESTAMBUL IP67 GU10 50W Brass

Istanbul ground recessed, made of aluminum with a degree of protection IP67, available in two colors: brass and silver. The embedment depth is 18cm. The position of the lamp holder is variable. This downlight is designed to illuminate residential outdoor spaces.

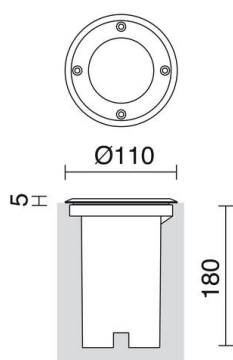

GENERAL DATA

Category	Recessed
Family	Estambul
Finish	[34] Brass
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Transparent glass
Frame material	Brass
ETIM class	EC000758
EAN	8435258628270

LIGHT SOURCES AND BEAMS

Sources	GU10 LED Bulb/ PAR16 50W max.
Lamp included	No
Beam	Indirect symmetric

TECHNICAL DATA

Dimensions	Height x Diameter (mm): 5 x 110
IP	IP67
IK	08
Dynamic pressure	2.000.0 Kg / 25.0 Km/h
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Auxiliary gear	Without equipment, not needed
Weight	0.65 Kg
Cable outlets	2
Lead wire length	500.0 mm
Cut hole box included	Yes
Cut hole dimensions	Diameter x Depth (mm): 92 x 180
ECORAAE category I	LED-A
ECORAAE I	0.25
Periodic maintenance	Yes


NOTES

- Anti-theft screws.
- Ajustable lampholder position.

ESTAMBUL 410A-G21X1A-34


Recessed floor ESTAMBUL IP67 GU10 50W Brass

RECOMMENDED ACCESSORIES




578A-L2105A-02
Lamp LED PRO GU10 LED Bulb
4.50W 300lm CRI80 4000K 38°
White

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	4.5
IP	IP20
Protection class	Class I



578A-L2104A-01
Lamp LED PRO GU10 3.50W 36°
White

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	3.5
IP	IP20
Protection class	Class I



578A-L2104A-02
Lamp LED PRO GU10 3.50W 36°
White

Input voltage	110-240V AC
Frequency	50/60
IP	IP20
Protection class	Class I