


BRICK 412B-L01F1B-02 Wall Bracket BRICK LED SMD 5W 325lm CRI80 3000K 67°,67° up-down Black



BRICK family is UAN LED wall sconces that stand out for its square cube-shaped design. BRICK LED fixtures are manufactured from aluminum in view of the decoration of residential interiors. LED luminaire is available in two version one single issue and another double light emission (direct and indirect). Moreover, the LED applied BRICK designed in two colors: black and brushed aluminum. BRICK is the reduced version of the family of wall LED BRICK G.

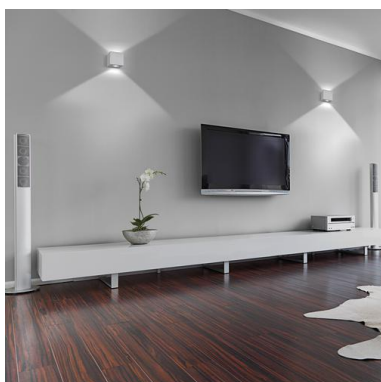

GENERAL DATA

Category	Surface
Family	Brick
Finish	[02] Black
Location	Indoor
Installation	Wall
Diffuser material	Transparent glass
EAN	8433264115272

LIGHT SOURCES AND BEAMS

Sources	LED SMD 5W max. 325lm 3000K CRI80
Total flux	585 lm
Energy efficiency	G
Beams	67° - Direct symmetric 67° - Indirect asymmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 120 x 120 x 120
IP	IP44
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Auxiliary gear	Electronic
Lifetime	40.000 h
LED lifetime L	80
LED lifetime B	50
Weight	203,0 Kg

BRICK

412B-L01F1B-02 Wall Bracket BRICK LED SMD 5W 325lm CRI80 3000K 67°,67° up-down
Black

PRODUCTS OF THE SAME FAMILY



Brick Down



Brick Up Down