


BELVEDERE 541A-L0103B-03

Wall recessed BELVEDERE IP54 LED SMD AC 3W 200lm
CRI80 3000K Grey

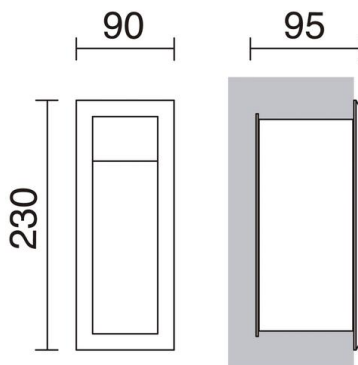

Empotrable de pared Belvedere, fabricado de aluminio en color gris claro con un grado de protección IP54, disponible en temperatura de color de 3000K. La profundidad de empotramiento es de 9cm. Son luminarias diseñadas para iluminar las zonas de paso, zonas comerciales y residenciales en los espacios exteriores.

GENERAL DATA

Category	Recessed
Family	Belvedere
Finish	1031 Grey
Location	Outdoor
Installation	Wall
Body material	Aluminum
Diffuser material	Transparent glass
Frame material	Aluminum
ETIM class	EC000481
EAN	8435258612392

LIGHT SOURCES AND BEAMS

Sources	LED SMD AC 3W max. 200lm 3000K CRI80
Total flux	65 lm
Energy efficiency	G
Beam	Direct asymmetric

TECHNICAL DATA

Dimensions	Height x Length x Depth (mm): 230 x 90 x 95
IP	IP54
IK	08
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Auxiliary gear	Driver integrado
Lifetime	30.000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.5 Kg
Cable outlets	1
Cut hole box included	Yes
Cut hole dimensions	Height x Length x Depth (mm): 231 x 95 x 90
ECORAE category I	LED-A
ECORAE I	0.5
Flammable surfaces	Yes

