


LULU

572A-G21X1A-02 Spotlights / Base Spotlight / Spike LULU IP66 GU10 LED MR16 3.50W 350lm
CRI80 3000K 180° Black

LULU projector is made of resin in black color, it has IP66 to install it on the ground. It has the maximum inclination angle of 180°, is available at color temperature of 3000K. It is recommended to illuminate the passage areas, landscaped areas, in addition, is suitable for installations on the surfaces with saline atmosphere.

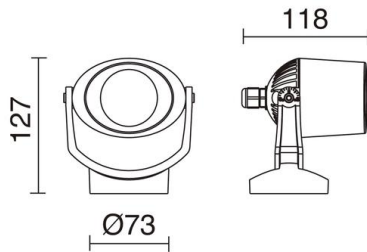

GENERAL DATA

Category	Spotlights
Family	Lulu
Finish	1021 Black
Location	Outdoor
Installation	Floor
Body material	Resin
Diffuser material	Transparent methacrylate
ETIM class	EC001744
EAN	8435256522181

LIGHT SOURCES AND BEAMS


Sources	GU10 LED MR16 3.5W max. 350lm 3000K CRI80
Lamp included	Yes
Beam	Direct symmetric

TECHNICAL DATA

Dimensions	Height x Diameter x Length (mm): 127 x 73 x 118
IP	IP66
Corrosion resistance	Yes
Protection class	Class II
Frequency	50/60 Hz
Input voltage	110-240V AC V
Auxiliary gear	Without equipment, not needed
Operating temperature range	-60 - 90 °C
Lifetime	25,000 h
Weight	0.45 Kg
Cable outlets	1
Lead wire length	300.0 mm
Tilt angle	180.0 °
ECORAE category I	CAT-B
ECORAE I	0.25

NOTES









- Lamp included
- Protected material against u.v.
- Luminaire suitable for installation in environments with saline atmosphere

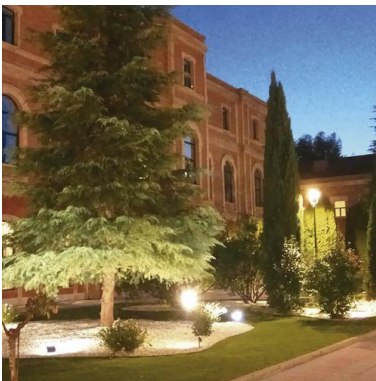

LULU

572A-G21X1A-02 Spotlights / Base Spotlight / Spike LULU IP66 GU10 LED MR16 3.50W 350lm
CRI80 3000K 180° Black

RECOMMENDED ACCESSORIES

		<p>A05A-409-02 Spike LULU, NAPOLIS Black</p>	<table border="1"> <tr> <td>Material</td> <td>Resin</td> </tr> <tr> <td>Finish</td> <td>[02] Black</td> </tr> </table>	Material	Resin	Finish	[02] Black						
Material	Resin												
Finish	[02] Black												
		<p>578A-L2105A-02 Lamp LED PRO GU10 LED Bulb 4.50W 300lm CRI80 4000K 38° White</p>	<table border="1"> <tr> <td>Input voltage</td> <td>110-240V AC</td> </tr> <tr> <td>Frequency</td> <td>50/60</td> </tr> <tr> <td>Wattage (W)</td> <td>4.5</td> </tr> <tr> <td>IP</td> <td>IP20</td> </tr> <tr> <td>Protection class</td> <td>Class I</td> </tr> </table>	Input voltage	110-240V AC	Frequency	50/60	Wattage (W)	4.5	IP	IP20	Protection class	Class I
Input voltage	110-240V AC												
Frequency	50/60												
Wattage (W)	4.5												
IP	IP20												
Protection class	Class I												
		<p>578A-L2104A-01 Lamp LED PRO GU10 3.50W 36° White</p>	<table border="1"> <tr> <td>Input voltage</td> <td>110-240V AC</td> </tr> <tr> <td>Frequency</td> <td>50/60</td> </tr> <tr> <td>Wattage (W)</td> <td>3.5</td> </tr> <tr> <td>IP</td> <td>IP20</td> </tr> <tr> <td>Protection class</td> <td>Class I</td> </tr> </table>	Input voltage	110-240V AC	Frequency	50/60	Wattage (W)	3.5	IP	IP20	Protection class	Class I
Input voltage	110-240V AC												
Frequency	50/60												
Wattage (W)	3.5												
IP	IP20												
Protection class	Class I												
		<p>578A-L2104A-02 Lamp LED PRO GU10 3.50W 36° White</p>	<table border="1"> <tr> <td>Input voltage</td> <td>110-240V AC</td> </tr> <tr> <td>Frequency</td> <td>50/60</td> </tr> <tr> <td>IP</td> <td>IP20</td> </tr> <tr> <td>Protection class</td> <td>Class I</td> </tr> </table>	Input voltage	110-240V AC	Frequency	50/60	IP	IP20	Protection class	Class I		
Input voltage	110-240V AC												
Frequency	50/60												
IP	IP20												
Protection class	Class I												

LULU 572A-G21X1A-02 Spotlights / Base Spotlight / Spike LULU IP66 GU10 LED MR16 3.50W 350lm
CRI80 3000K 180° Black

COMPLEMENTARY IMAGES

