


NURE 639A-L0215B-01 Bollard NURE IP65 LED SMD AC 15W 2145lm CRI80 4000K 46° 500mm 300° White

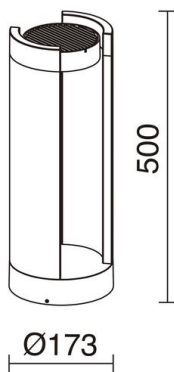

The Nure beacon is made of aluminum in white with IP65 and a color temperature of 4000K. The light is adjustable with the max. Inclination angle: 300°. Its beam of light is direct. It is designed to illuminate the garden areas outside.

GENERAL DATA

Category	Bollards and columns
Family	Nure
Finish	[01] White
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Opalized crystal
ETIM class	EC000301
EAN	8435256535297

LIGHT SOURCES AND BEAMS

Sources	LED SMD AC 15W max. 2145lm 4000K CRI80
Total flux	701 lm
Energy efficiency	A++, A+, A
Beam	46° - Direct symmetric

TECHNICAL DATA

Dimensions	Diameter x Height (mm): 173 x 500
IP	IP65
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Auxiliary gear	Electronic
Lifetime	27,000 h
LED lifetime L	80
LED lifetime B	50
Weight	3.0 Kg
Cable outlets	2
Tilt angle	300.0 °
ECORAE category I	LED-A
ECORAE I	0.5
Anchorage included	Yes
Flammable surfaces	Yes

