


MUDY 662A-L0404D-30 Recessed floor MUDY IP68 LED SMD RGB 4W CRI80 45° Stainless steel

Mudy recessed floor, made of brass with a degree of protection IP68, available with two optics and in two versions warm white and RGB, also controlled via the remote control. The embedment depth is 10cm. These luminaires are valid in installations outside the water of outdoor spaces.

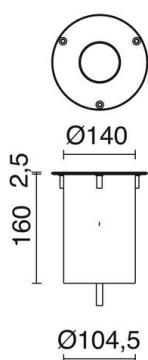

GENERAL DATA

Category	Recessed
Family	Mudy
Finish	[30] Stainless steel
Location	Outdoor
Installation	Floor
Body material	Brass
Diffuser material	Transparent glass
Frame material	Inox aisi 316L
ETIM class	EC000758
EAN	8435256541342

LIGHT SOURCES AND BEAMS

Sources	LED SMD RGB 4W max. CRI80
Energy efficiency	A++, A+, A
Beam	45° - Indirect symmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 140 x 140 x 160
IP	IP68
Static pressure	500.0 Kg
Protection class	Class III
Frequency	50/60 Hz
Input voltage	12V AC V
Auxiliary gear	Without equipment, needed
Lifetime	50.000 h
LED lifetime L	80
LED lifetime B	20
Weight	2.0 Kg
Cable outlets	1
Lead wire length	2.500.0 mm
Cut hole dimensions	Diameter x Depth (mm): 105 x 104.5
ECORAE category I	LED-B
Periodic maintenance	Yes

NOTES

- Available in warm white and DMX
- Available in 2 different beams angles (narrow 22°, medium 34°)
- With remote control
- Suitable for installations outside water
- Luminaire suitable for installation in environments with saline atmosphere

MUDY 662A-L0404D-30 Recessed floor MUDY IP68 LED SMD RGB 4W CRI80 45° Stainless steel

RECOMMENDED ACCESSORIES



B02I-X33F9D-02
Power supplies ALIMENTADORES
Black

Input voltage	230V AC
Frequency	50/60
Wattage (W)	350.0
IP	IP65
Protection class	Class II



B02I-X33G1D-02
Power supplies ALIMENTADORES
Black

Input voltage	230V AC
Frequency	50/60
Wattage (W)	700.0
IP	IP65
Protection class	Class II