
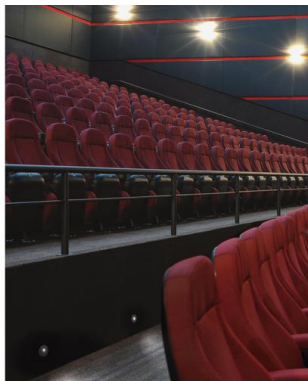


LIGUR 706A-L0103B-39

Wall recessed LIGUR IP44 LED SMD 3W 160lm CRI80 3000K Anodized aluminum

Family Ligur recessed mounting is available in two colors: white and gray and in two formats: square and round. It has a very original design that fits into any interior space. It has an IP44 and consumption is very low.

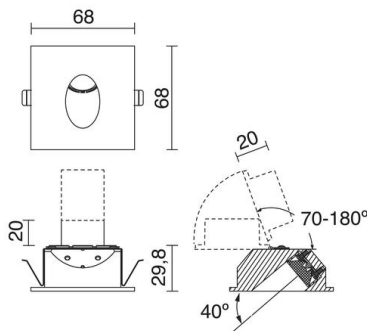

GENERAL DATA

Category	Recessed
Family	Ligur
Finish	[39] Anodized aluminum
Location	Indoor
Installation	Wall
Body material	Aluminum
Diffuser material	Prismatic polycarbonate
ETIM class	EC000481
EAN	8435256542868

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 160lm 3000K CRI80
Total flux	160 lm
Energy efficiency	G

TECHNICAL DATA

Dimensions	Depth x Length x Width (mm): 30 x 68 x 68
IP	IP44
Protection class	Class II
Frequency	50/60 Hz
Input voltage	220-240V AC V
Lifetime	50,000 h
LED lifetime L	80
LED lifetime B	20
Weight	0.21 Kg
Cut hole box included	Yes
Cut hole dimensions	Depth x Length x Width (mm): 85 x 64 x 64
ECORAAE category I	LED-A

LIGUR 706A-L0103B-39 Wall recessed LIGUR IP44 LED SMD 3W 160lm CRI80 3000K Anodized aluminum

PRODUCTS OF THE SAME FAMILY



Ligur Round