


WINDOW 2 726A-L0103B-01 Wall recessed WINDOW 2 IP44 LED SMD 3W 160lm CRI80 3000K White

WINDOW 2 Shorts floor small to light diffusely passageways. His wavy inclined plane we can also serve as a reference in the wall itself which is embedded.

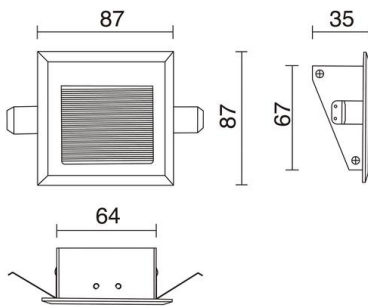

GENERAL DATA

Category	Recessed
Family	Window 2
Finish	[01] White
Location	Indoor
Installation	Wall
Body material	Aluminum
Diffuser material	Prismatic polycarbonate
ETIM class	EC000481
EAN	8435256543353

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 160lm 3000K CRI80
Energy efficiency	G

TECHNICAL DATA

Dimensions	Depth x Length x Width (mm): 35 x 87 x 87
IP	IP44
Protection class	Class II
Frequency	50/60 Hz
Input voltage	220-240V AC V
Lifetime	50.000 h
LED lifetime L	80
LED lifetime B	20
Weight	0.4 Kg
Cut hole box included	Yes
Cut hole dimensions	Depth x Length x Width (mm): 48 x 83 x 83
ECORAE category I	LED-A

WINDOW 2 726A-L0103B-01 Wall recessed WINDOW 2 IP44 LED SMD 3W 160lm CRI80 3000K White

COMPLEMENTARY IMAGES

