


WINDOW 2 726A-L0103B-39 Wall recessed WINDOW 2 IP44 LED SMD 3W 160lm CRI80 3000K Anodized aluminum

WINDOW 2 Shorts floor small to light diffusely passageways. His wavy inclined plane we can also serve as a reference in the wall itself which is embedded.

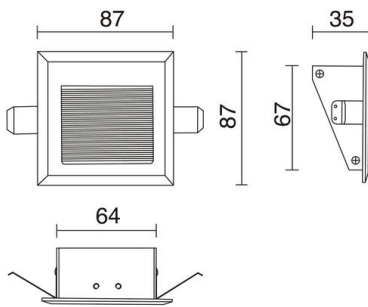

GENERAL DATA

Category	Recessed
Family	Window 2
Finish	[39] Anodized aluminum
Location	Indoor
Installation	Wall
Body material	Aluminum
Diffuser material	Prismatic polycarbonate
ETIM class	EC000481
EAN	8435256543360

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 160lm 3000K CRI80
Energy efficiency	G

TECHNICAL DATA

Dimensions	Depth x Length x Width (mm): 35 x 87 x 87
IP	IP44
Protection class	Class II
Frequency	50/60 Hz
Input voltage	220-240V AC V
Auxiliary gear	Electronic
Lifetime	50.000 h
LED lifetime L	80
LED lifetime B	20
Weight	0.4 Kg
Cut hole box included	Yes
Cut hole dimensions	Depth x Length x Width (mm): 48 x 83 x 83
ECORAE category I	LED-A