


ECLIPSE 736B-G23X1D-02

Recessed ceiling ECLIPSE GU5.3 50W Black

ECLIPSE is a recessed light fixture that has been manufactured in steel and with an anti-glare element discrete design. This LED Recessed is a solution high efficiency LED lighting for homes, hotels or residential areas and has two color temperatures: a warm light (3000K) and other cold light (4000K).

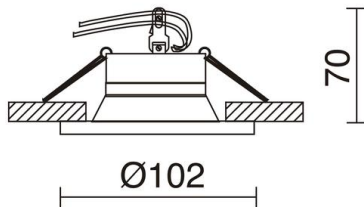

GENERAL DATA

Category	Recessed
Family	Eclipse
Finish	[02] Black
Location	Indoor
Installation	Ceiling
Body material	Steel
Frame material	Steel
ETIM class	EC001744
EAN	8433264087609

LIGHT SOURCES AND BEAMS

Sources	GU5.3 QR-CBC 51 50W max.
Energy efficiency	A++, A+, A, B, C
Lamp included	No
Beam	Direct symmetric

TECHNICAL DATA

Dimensions	Diameter x Height (mm): 102 x 70
IP	IP20
Protection class	Class III
Frequency	50/60 Hz
Input voltage	12V AC V
Auxiliary gear	Without equipment, needed
Weight	0.64 Kg
Cut hole dimensions	Diameter (mm): 75
ECORAE category I	CAT-A



NOTES

Finishes upon request: Chrome

ECLIPSE 736B-G23X1D-02

Recessed ceiling ECLIPSE GU5.3 50W Black

RECOMMENDED ACCESSORIES

	<p>B02T-X3360D-02 Power supplies ACCESORIOS Black</p>	<table border="1"> <tr><td>Input voltage</td><td>220-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>60.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> </table>	Input voltage	220-240V AC	Frequency	50/60	Wattage (W)	60.0	IP	IP20		
Input voltage	220-240V AC											
Frequency	50/60											
Wattage (W)	60.0											
IP	IP20											
	<p>B02T-X3370D-02 Power supplies ACCESORIOS Black</p>	<table border="1"> <tr><td>Input voltage</td><td>220-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>50.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> </table>	Input voltage	220-240V AC	Frequency	50/60	Wattage (W)	50.0	IP	IP20		
Input voltage	220-240V AC											
Frequency	50/60											
Wattage (W)	50.0											
IP	IP20											
 <p>Technical drawing of lamp 368C-L2305D-01 showing a diameter of 50mm and a height of 45mm.</p>	<p>368C-L2305D-01 Lamp LED PRO GU5,3 LED Bulb 4W 300lm CRI80 3000K 60° White</p>	<table border="1"> <tr><td>Input voltage</td><td>12V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>4.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class III</td></tr> </table>	Input voltage	12V AC	Frequency	50/60	Wattage (W)	4.0	IP	IP20	Protection class	Class III
Input voltage	12V AC											
Frequency	50/60											
Wattage (W)	4.0											
IP	IP20											
Protection class	Class III											
 <p>Technical drawing of lamp 369C-L2308D-01 showing a diameter of 50mm and a height of 53.7mm.</p>	<p>369C-L2308D-01 Lamp LED PRO GU5,3 LED Bulb 7.60W 550lm CRI80 3000K 45°</p>	<table border="1"> <tr><td>Input voltage</td><td>12V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>7.6</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class III</td></tr> </table>	Input voltage	12V AC	Frequency	50/60	Wattage (W)	7.6	IP	IP20	Protection class	Class III
Input voltage	12V AC											
Frequency	50/60											
Wattage (W)	7.6											
IP	IP20											
Protection class	Class III											