


LEN 798C-G21X1B-01

Trimless ceiling LEN GU10 50W White



LEN is a family of LED recessed lights that have been developed from a square, circular design made of plaster, which offers the possibility of painting the luminaire. The built-LEN is integrated into the roof and makes the light is the only player in LED lighting projects in any interior space completely.

GENERAL DATA

Category	Recessed
Family	Len
Finish	[01] White
Location	Indoor
Installation	Ceilling
Body material	Plaster
ETIM class	EC001744
EAN	8433264095482

LIGHT SOURCES AND BEAMS

Sources	GU10 QPAR-16 50W max.
Lamp included	No
Beam	Direct symmetric

TECHNICAL DATA

Dimensions	Diameter x Height (mm): 130 x 53
IP	IP20
IP2	IP20
Protection class	Class II
Frequency	50/60 Hz
Input voltage	110-240V AC V
Weight	0.64 Kg
Cut hole dimensions	Diameter x Depth (mm): 133 x 110
ECORAAE category I	CAT-A

NOTES

Trimless
It is recommended to sand the surface of the luminaire with fine grain sandpaper.



LEN 798C-G21X1B-01

Trimless ceiling LEN GU10 50W White


RECOMMENDED ACCESSORIES

	<p>578A-L2105A-02 Lamp LED PRO GU10 LED Bulb 4.50W 300lm CRI80 4000K 38° White</p>	<table border="1"> <tr><td>Input voltage</td><td>110-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>4.5</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class I</td></tr> </table>	Input voltage	110-240V AC	Frequency	50/60	Wattage (W)	4.5	IP	IP20	Protection class	Class I		
Input voltage	110-240V AC													
Frequency	50/60													
Wattage (W)	4.5													
IP	IP20													
Protection class	Class I													
	<p>578A-L2104A-01 Lamp LED PRO GU10 3.50W 36° White</p>	<table border="1"> <tr><td>Input voltage</td><td>110-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>3.5</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class I</td></tr> </table>	Input voltage	110-240V AC	Frequency	50/60	Wattage (W)	3.5	IP	IP20	Protection class	Class I		
Input voltage	110-240V AC													
Frequency	50/60													
Wattage (W)	3.5													
IP	IP20													
Protection class	Class I													
	<p>729A-L33R1B-00 Recessed ceiling ACCESORIOS 1- 10V,Push LED COB 8W 803lm CRI85 4000K 40°</p>	<table border="1"> <tr><td>Input voltage</td><td>110-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>8.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class II</td></tr> <tr><td>Dimmable</td><td>1-10V, Push</td></tr> </table>	Input voltage	110-240V AC	Frequency	50/60	Wattage (W)	8.0	IP	IP20	Protection class	Class II	Dimmable	1-10V, Push
Input voltage	110-240V AC													
Frequency	50/60													
Wattage (W)	8.0													
IP	IP20													
Protection class	Class II													
Dimmable	1-10V, Push													
	<p>578A-L2104A-02 Lamp LED PRO GU10 3.50W 36° White</p>	<table border="1"> <tr><td>Input voltage</td><td>110-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class I</td></tr> </table>	Input voltage	110-240V AC	Frequency	50/60	IP	IP20	Protection class	Class I				
Input voltage	110-240V AC													
Frequency	50/60													
IP	IP20													
Protection class	Class I													
	<p>729A-L31R1B-00 Recessed ceiling ACCESORIOS 1- 10V,Push LED COB 8W 766lm CRI85 3000K 40°</p>	<table border="1"> <tr><td>Input voltage</td><td>110-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>8.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class II</td></tr> <tr><td>Dimmable</td><td>1-10V, Push</td></tr> </table>	Input voltage	110-240V AC	Frequency	50/60	Wattage (W)	8.0	IP	IP20	Protection class	Class II	Dimmable	1-10V, Push
Input voltage	110-240V AC													
Frequency	50/60													
Wattage (W)	8.0													
IP	IP20													
Protection class	Class II													
Dimmable	1-10V, Push													
	<p>729A-L3108B-00 Recessed ceiling ACCESORIOS LED COB 8W 766lm CRI85 3000K 40°</p>	<table border="1"> <tr><td>Input voltage</td><td>220-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>8.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class II</td></tr> </table>	Input voltage	220-240V AC	Frequency	50/60	Wattage (W)	8.0	IP	IP20	Protection class	Class II		
Input voltage	220-240V AC													
Frequency	50/60													
Wattage (W)	8.0													
IP	IP20													
Protection class	Class II													
	<p>729A-L3308B-00 Recessed ceiling ACCESORIOS LED COB 8W 803lm CRI85 4000K 40°</p>	<table border="1"> <tr><td>Input voltage</td><td>220-240V AC</td></tr> <tr><td>Frequency</td><td>50/60</td></tr> <tr><td>Wattage (W)</td><td>8.0</td></tr> <tr><td>IP</td><td>IP20</td></tr> <tr><td>Protection class</td><td>Class II</td></tr> </table>	Input voltage	220-240V AC	Frequency	50/60	Wattage (W)	8.0	IP	IP20	Protection class	Class II		
Input voltage	220-240V AC													
Frequency	50/60													
Wattage (W)	8.0													
IP	IP20													
Protection class	Class II													

LEN 798C-G21X1B-01

Trimless ceiling LEN GU10 50W White

COMPLEMENTARY IMAGES

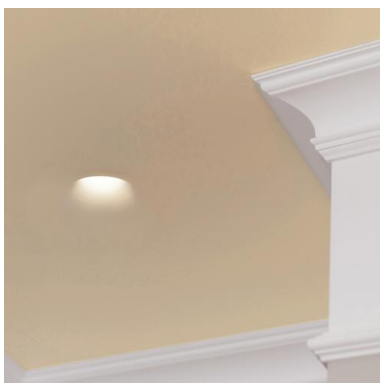

PRODUCTS OF THE SAME FAMILY



Len Round M LED



Len Round S



Len Round S LED



Len Square



Len Square LED