
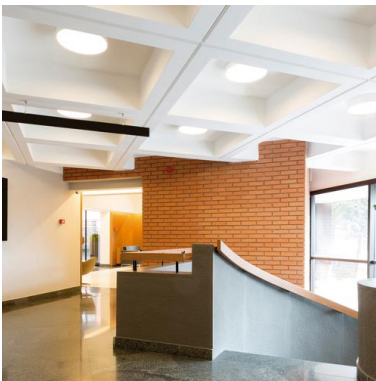


# BILOG 801A-L3348B-01 Surface Mounted BILOG LED SMD 48W 4563lm CRI80 4000K 120° White

BILOG is an LED attached to ceiling luminaire available in two sizes of large sizes and high flux to illuminate large areas: hotel lobbies, conference rooms or meeting rooms. BILOG takes center stage in areas where it is needed an effective and decorative lighting at once. This lamp has been developed in two applications: as a ceiling lamp as ceiling (pendant luminaire).

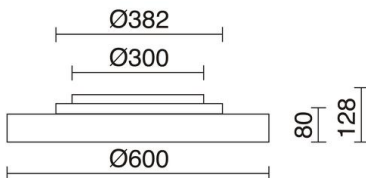

### GENERAL DATA

Category	Surface
Family	Bilog
Finish	[01] White
Location	Indoor
Installation	Ceiling
Body material	Steel, Aluminum
Diffuser material	Prismatic polycarbonate
ETIM class	EC0028g2
EAN	8433264071448


### LIGHT SOURCES AND BEAMS

Sources	LED SMD 48W max. 4563lm 4000K CRI80
Energy efficiency	F
Beam	120° - Direct symmetric

### TECHNICAL DATA


Dimensions	Height x Diameter (mm): 128 x 600
IP	IP20
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Power factor	0.9
Auxiliary gear	Electronic
Lifetime	40,000 h
LED lifetime L	80
LED lifetime B	20
Weight	5.4 Kg
ECORAE category I	LED-C

### PHOTOMETRIC DATA

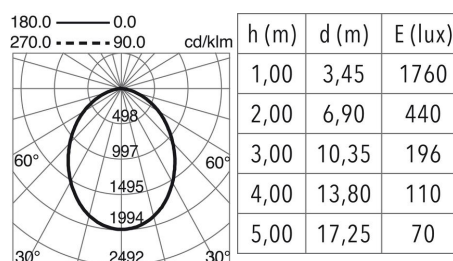

**BILOG** 801A-L3348B-01 Surface Mounted BILOG LED SMD 48W 4563lm CRI80 4000K 120° White

**RECOMMENDED ACCESSORIES**



**B21A-X33X2A-01**  
Kit suspension BILOG White

# BILOG 801A-L3348B-01 Surface Mounted BILOG LED SMD 48W 4563lm CRI80 4000K 120° White

## PRODUCTS OF THE SAME FAMILY

---



Bilog L