


BILOG 801B-L31A3B-01 Surface Mounted BILOG LED SMD 110W 9420lm CRI80 3000K 110° White

BILOG is an LED attached to ceiling luminaire available in two sizes of large sizes and high flux to illuminate large areas: hotel lobbies, conference rooms or meeting rooms. BILOG takes center stage in areas where it is needed an effective and decorative lighting at once. This lamp has been developed in two applications: as a ceiling lamp as ceiling (pendant luminaire).

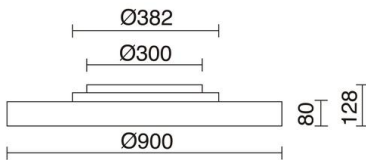

GENERAL DATA

Category	Surface
Family	Bilog
Finish	[01] White
Location	Indoor
Installation	Ceiling
Body material	Steel, Aluminum
Diffuser material	Prismatic polycarbonate
ETIM class	EC0028g2
EAN	8433264071455


LIGHT SOURCES AND BEAMS

Sources	LED SMD 110W max. 9420lm 3000K CRI80
Energy efficiency	A+
Beam	110° - Direct symmetric

TECHNICAL DATA


Dimensions	Height x Diameter (mm): 128 x 900
IP	IP20
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Power factor	0.9
Auxiliary gear	Electronic
Lifetime	40.000 h
LED lifetime L	80
LED lifetime B	20
Weight	8.5 Kg
ECORAE category I	LED-C

PHOTOMETRIC DATA

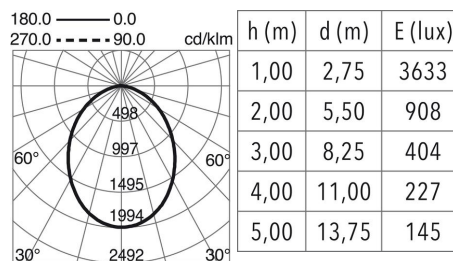

BILOG 801B-L31A3B-01 Surface Mounted BILOG LED SMD 110W 9420lm CRI80 3000K 110° White

RECOMMENDED ACCESSORIES



B21A-X33X2A-01
Kit suspension BILOG White

BILOG

801B-L31A3B-01 Surface Mounted BILOG LED SMD 110W 9420lm CRI80 3000K 110° White

COMPLEMENTARY IMAGES



PRODUCTS OF THE SAME FAMILY



Bilog M