


BUIS 805A-L3315B-01

Surface Mounted BUIS IP54 LED COB 14W 1422lm CRI83 4000K 50° White

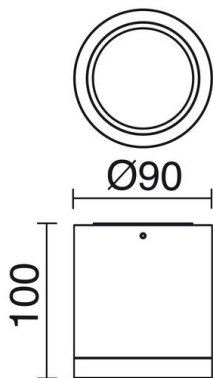

Surface Downlight LED BUIS has been manufactured partrir three sizes and powers that favor their flow of light. This LED downlight features high IP protection making it suitable for lighting fixture bathrooms, kitchens and porches and canopies above all, or interior lighting epacios requiring sober and discreet.

GENERAL DATA

| | |
|--------------------|-------------------------|
| Category | Surface |
| Family | Buis |
| Finish | [01] White |
| Location | Indoor |
| Installation | Ceilling |
| Body material | Aluminum |
| Diffuser material | Clear transparent glass |
| Reflector material | Faceted aluminum |
| ETIM class | EC0028g2 |
| EAN | 8433264159351 |

LIGHT SOURCES AND BEAMS


| | |
|-------------------|-------------------------------------|
| Sources | LED COB 14W max. 1422lm 4000K CRI83 |
| Energy efficiency | F |
| Beam | 50° - Direct symmetric |

TECHNICAL DATA

| | |
|--------------------|----------------------------------|
| Dimensions | Height x Diameter (mm): 100 x 90 |
| IP | IP54 |
| Protection class | Class I |
| Frequency | 50/60 Hz |
| Input voltage | 220-240V AC V |
| Power factor | 0.9 |
| Auxiliary gear | Electronic |
| Lifetime | 40,000 h |
| LED lifetime L | 80 |
| LED lifetime B | 20 |
| Weight | 0.52 Kg |
| ECORAAE category I | LED-A |



PHOTOMETRIC DATA

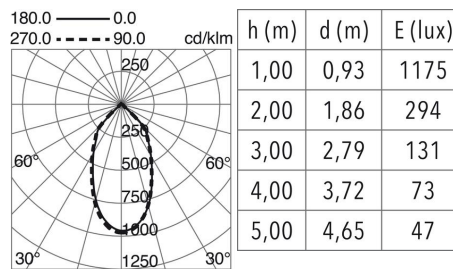

BUIS

805A-L3315B-01 Surface Mounted BUIS IP54 LED COB 14W 1422lm CRI83 4000K 50° White

PRODUCTS OF THE SAME FAMILY



Buis L



Buis M