


# BUIS 805B-L3325B-01

Surface Mounted BUIS IP54 LED COB 24W 2420lm CRI80 4000K 50° White

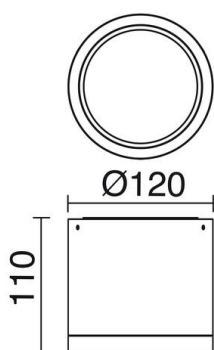

Surface Downlight LED BUIS has been manufactured partrir three sizes and powers that favor their flow of light. This LED downlight features high IP protection making it suitable for lighting fixture bathrooms, kitchens and porches and canopies above all, or interior lighting epacios requiring sober and discreet.

### GENERAL DATA

Category	Surface
Family	Buis
Finish	[01] White
Location	Indoor
Installation	Ceilling
Body material	Aluminum
Diffuser material	Clear transparent glass
Reflector material	Faceted aluminum
ETIM class	EC0028g2
EAN	8433264159375

### LIGHT SOURCES AND BEAMS


Sources	LED COB 24W max. 2420lm 4000K CRI80
Energy efficiency	F
Beam	50° - Direct symmetric

### TECHNICAL DATA

Dimensions	Height x Diameter (mm): 110 x 120
IP	IP54
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Power factor	0.9
Auxiliary gear	Electronic
Lifetime	40,000 h
LED lifetime L	80
LED lifetime B	20
Weight	0.75 Kg
ECORAAE category I	LED-A



### PHOTOMETRIC DATA

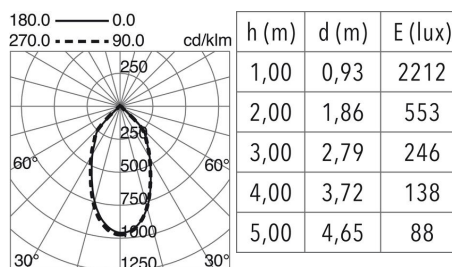

# BUIS

805B-L3325B-01 Surface Mounted BUIS IP54 LED COB 24W 2420lm CRI80 4000K 50° White

PRODUCTS OF THE SAME FAMILY

---



Buis L



Buis S