
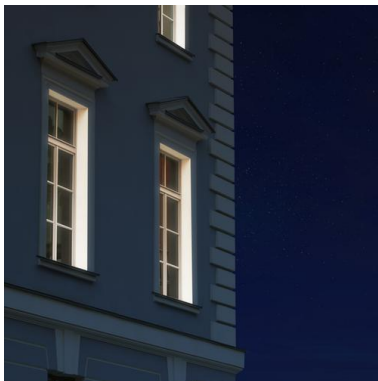


SHINNY 951A-L3103A-04

Profiler SHINNY IP65 LED SMD 2.50W 170lm CRI80 3000K 5°

Anthracite

Ideal for lighting windows, arches and corridors. The new profiler Dopo Lighting, made in aluminum, it is IP65 and it has beam angle of 5°. Suitable for installation on wall or floor. It includes support for sloping ledge.

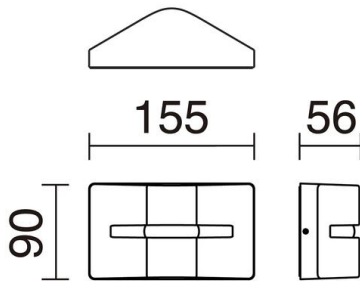

GENERAL DATA

Category	Surface
Family	Shinny
Finish	[04] Anthracite
Location	Outdoor
Installation	Floor, Wall
Body material	Aluminum
Diffuser material	PMMA lenses
EAN	8433264111533

LIGHT SOURCES AND BEAMS

Sources	LED SMD 2,5W max. 170lm 3000K CRI80
Total flux	110 lm
Energy efficiency	G
Beam	5° - Direct symmetric

TECHNICAL DATA

Dimensions	Length x Width x Height (mm): 155 x 90 x 56
IP	IP65
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Total wattage	3 W
Output current	700 mA
Power factor	0.5
Lifetime	30.000 h
LED lifetime L	80
LED lifetime B	50
Cable outlets	2
Anchorage included	Yes

NOTES

Support for inclined shelf included