


# MINIMAL 977A-L0103A-01 Reading Wall Bracket MINIMAL LED SMD 3W CRI80 3000K 90° White

Family of minimal readers, available in white, black and gold finish. Manufactured in steel, prismatic methacrylate diffuser and LED LED SMD light source. Ideal for hospitality and residential sector.

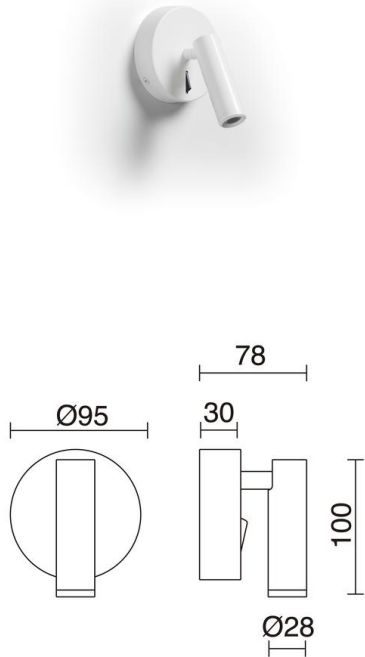

## GENERAL DATA

Category	Surface
Family	Minimal
Finish	[01] White
Location	Indoor
Installation	Wall
Body material	Steel
Diffuser material	Prismatic methacrylate
ETIM class	EC001744
EAN	8433264117962

## LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 3000K CRI80
Energy efficiency	G
Beam	Direct symmetric

## TECHNICAL DATA

IP	IP20
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Output current	550 mA
Auxiliary gear	Electronic
Power switches	1
Lifetime	40.000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.4 Kg
Tilt angle	90.0 °
Rotation angle	300.0 °
ECORAE category I	LED-A

## NOTES

Douyble position