


MINIMAL 977A-L0103A-02-47 Reading Wall Bracket MINIMAL LED SMD 3W CRI80 3000K 90° Gold Black

Family of minimal readers, available in white, black and gold finish. Manufactured in steel, prismatic methacrylate diffuser and LED LED SMD light source. Ideal for hospitality and residential sector.

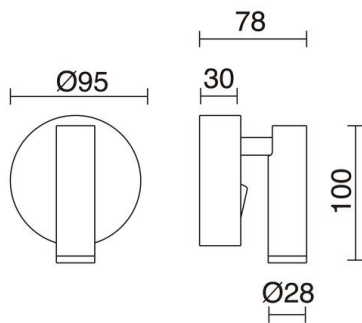

GENERAL DATA

Category	Surface
Family	Minimal
Finish	[47] Gold / [02] Black
Location	Indoor
Installation	Wall
Body material	Steel
Diffuser material	Prismatic methacrylate
ETIM class	EC001744
EAN	8433264117986

LIGHT SOURCES AND BEAMS

Sources	LED SMD 3W max. 3000K CRI80
Energy efficiency	G
Beam	Direct symmetric

TECHNICAL DATA

IP	IP20
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Output current	550 mA
Auxiliary gear	Electronic
Power switches	1
Lifetime	40.000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.4 Kg
Tilt angle	90.0 °
Rotation angle	300.0 °
ECORAE category I	LED-A

NOTES

Douyble position