
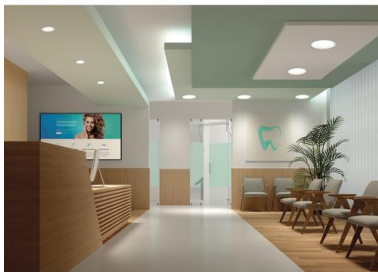



# CALYPSO2 979A-L3105A-01 Recessed ceiling CALYPSO2 IP44 LED SMD 5W 440lm CRI80 3000K 110° White



### GENERAL DATA

Category	Recessed
Family	CALYPSO2
Finish	[o1] White
Location	Indoor
Installation	Ceiling
Body material	Aluminum
Diffuser material	Frosted methacrylate
Frame material	Aluminum
ETIM class	EC001744
EAN	8433264115548


### LIGHT SOURCES AND BEAMS

Sources	LED SMD 5W max. 440lm 3000K CRI80
Total flux	329 lm
Energy efficiency	G
Beam	110° - Direct symmetric

### TECHNICAL DATA

Dimensions	Height x Diameter (mm): 40 x 90
IP	IP44
Protection class	Class II
Frequency	50/60 Hz
Input voltage	110-240V AC V
Output current	120 mA
Power factor	0.5
Auxiliary gear	Remote driver
Lifetime	40.000 h
LED lifetime L	70
LED lifetime B	20
Weight	1.3 Kg
Cut hole dimensions	Diameter (mm): 75
ECORAE category I	LED-B

### PHOTOMETRIC DATA



# CALYPSO2

979A-L3105A-01 Recessed ceiling CALYPSO2 IP44 LED SMD 5W 440lm CRI80  
3000K 110° White

PRODUCTS OF THE SAME FAMILY

---



Calypso2 L



Calypso2 M



Calypso2 XL