









BL183 **BL184**
BL186 **BL187**

USER MANUAL

LED SURFACE DOWNLIGHT

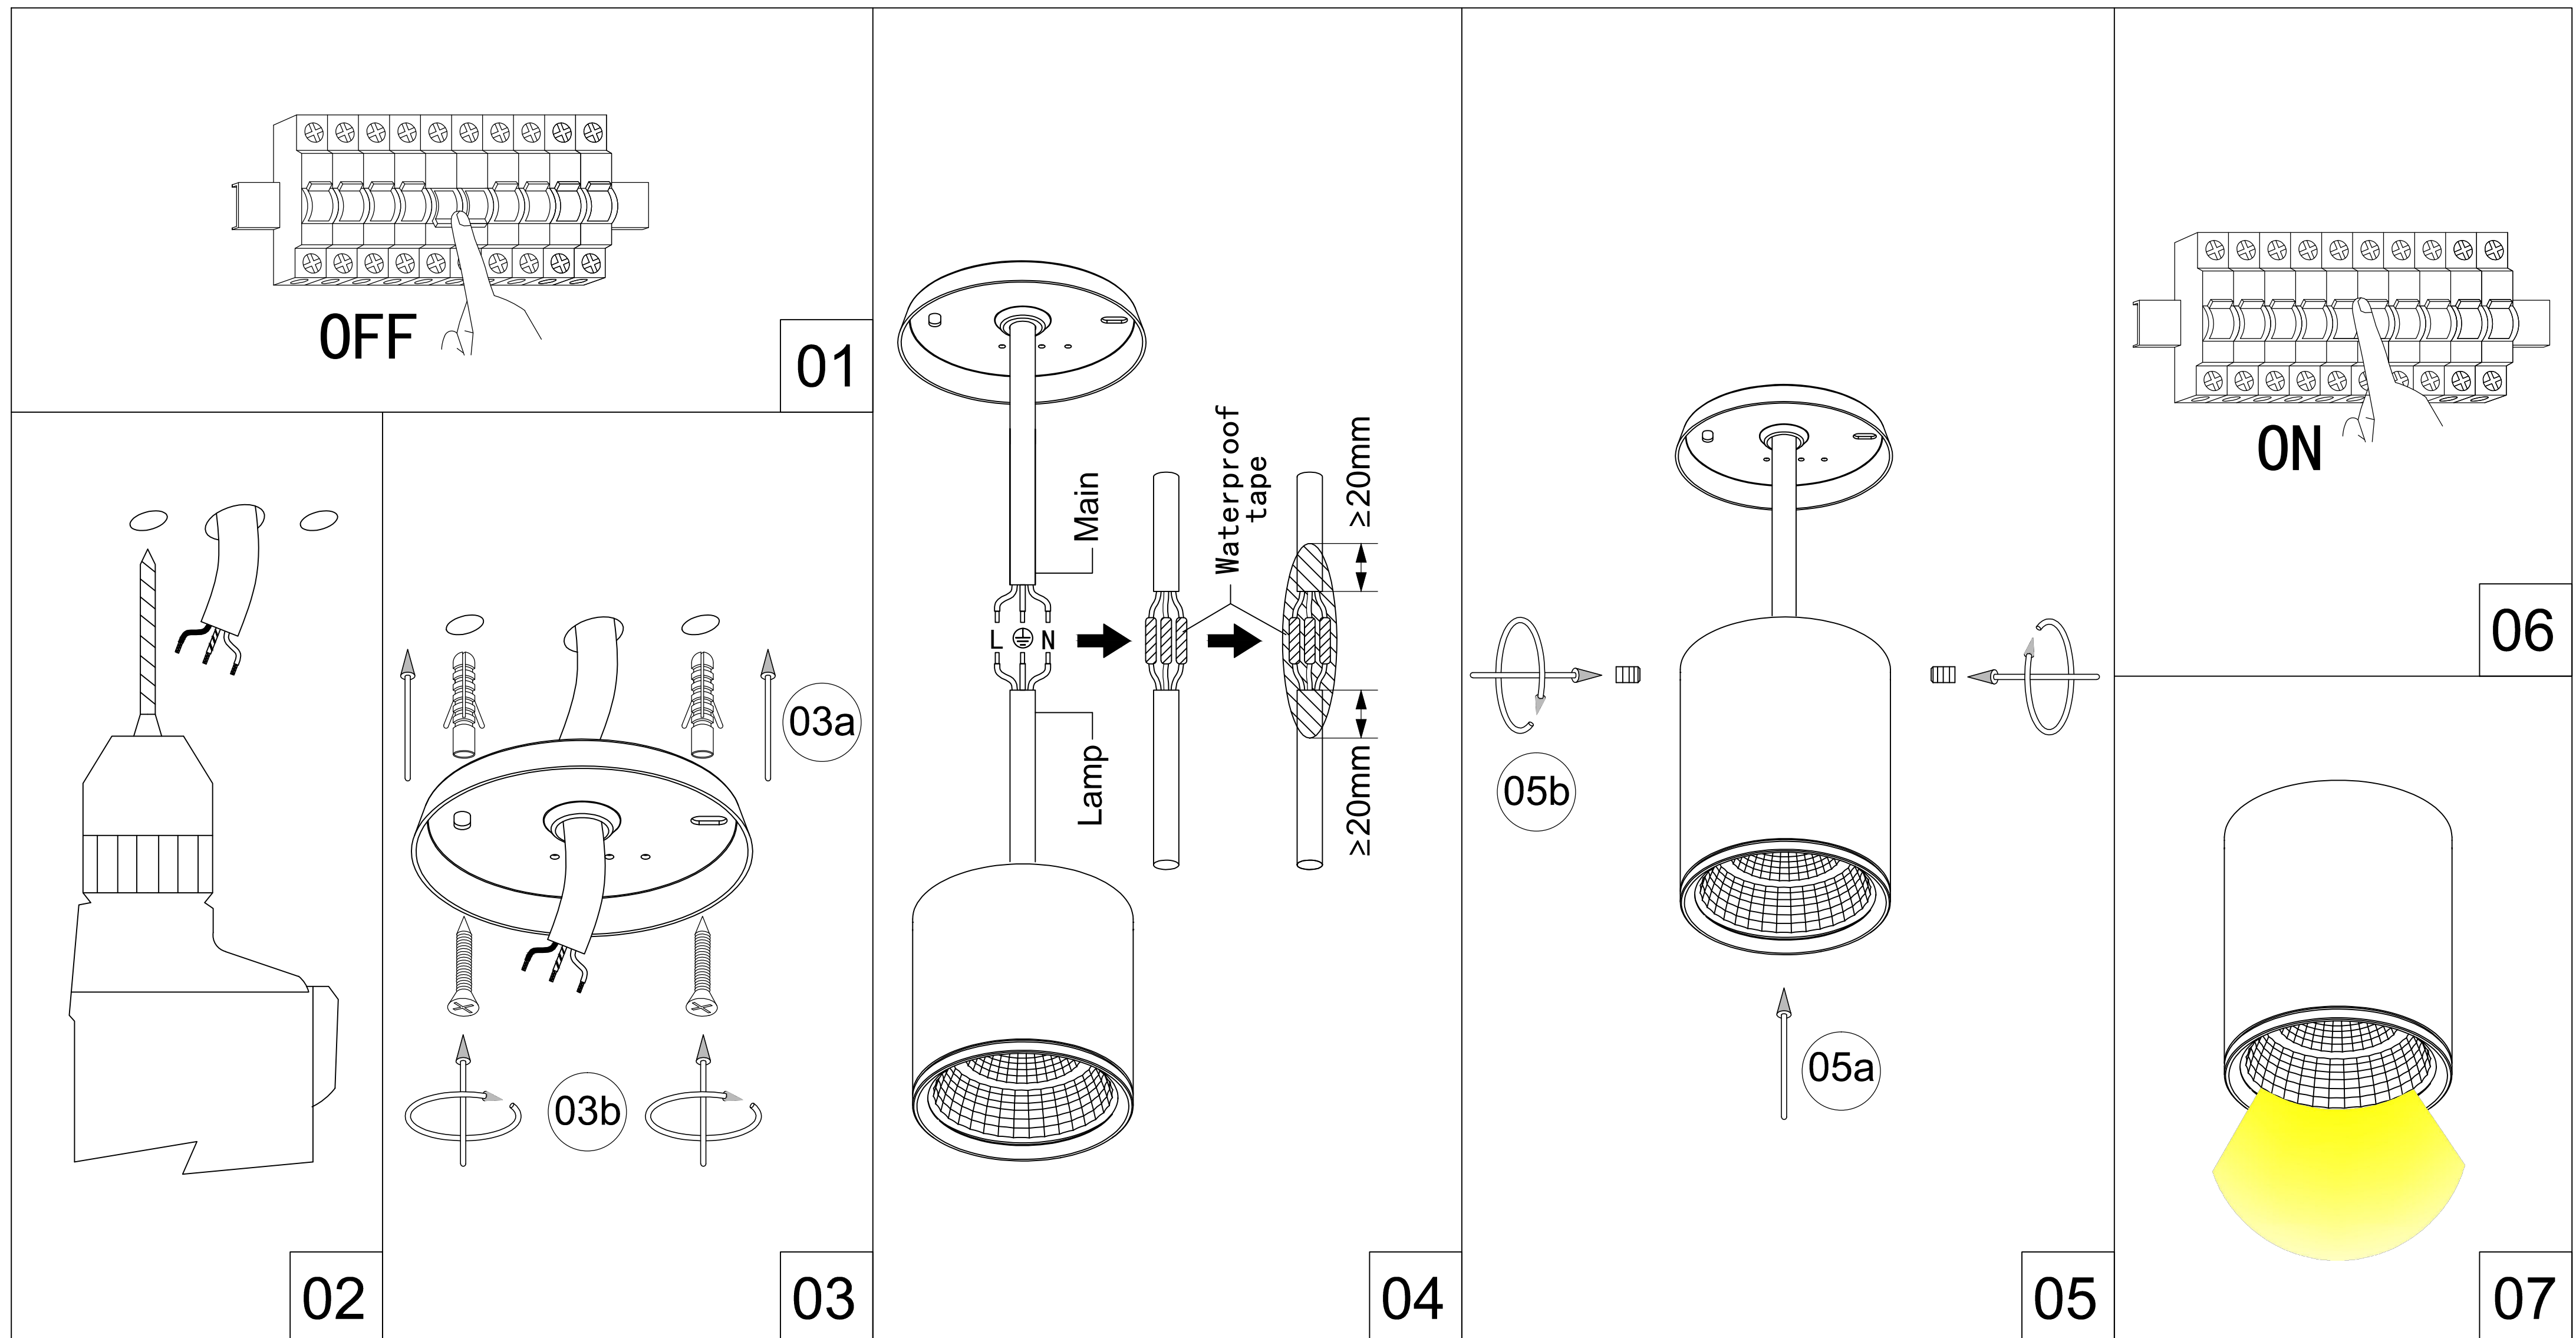

01. SWITCH OFF MAIN
02. MAKE HOLE PATTERN
03. INSTALL THE BASE PLATE
04. CONNECT LAMP TO THE MAIN
05. DRIVE IN THE SCREWS UNTILL TIGHT
06. SWITCH ON THE MAIN AND LIGHT ON

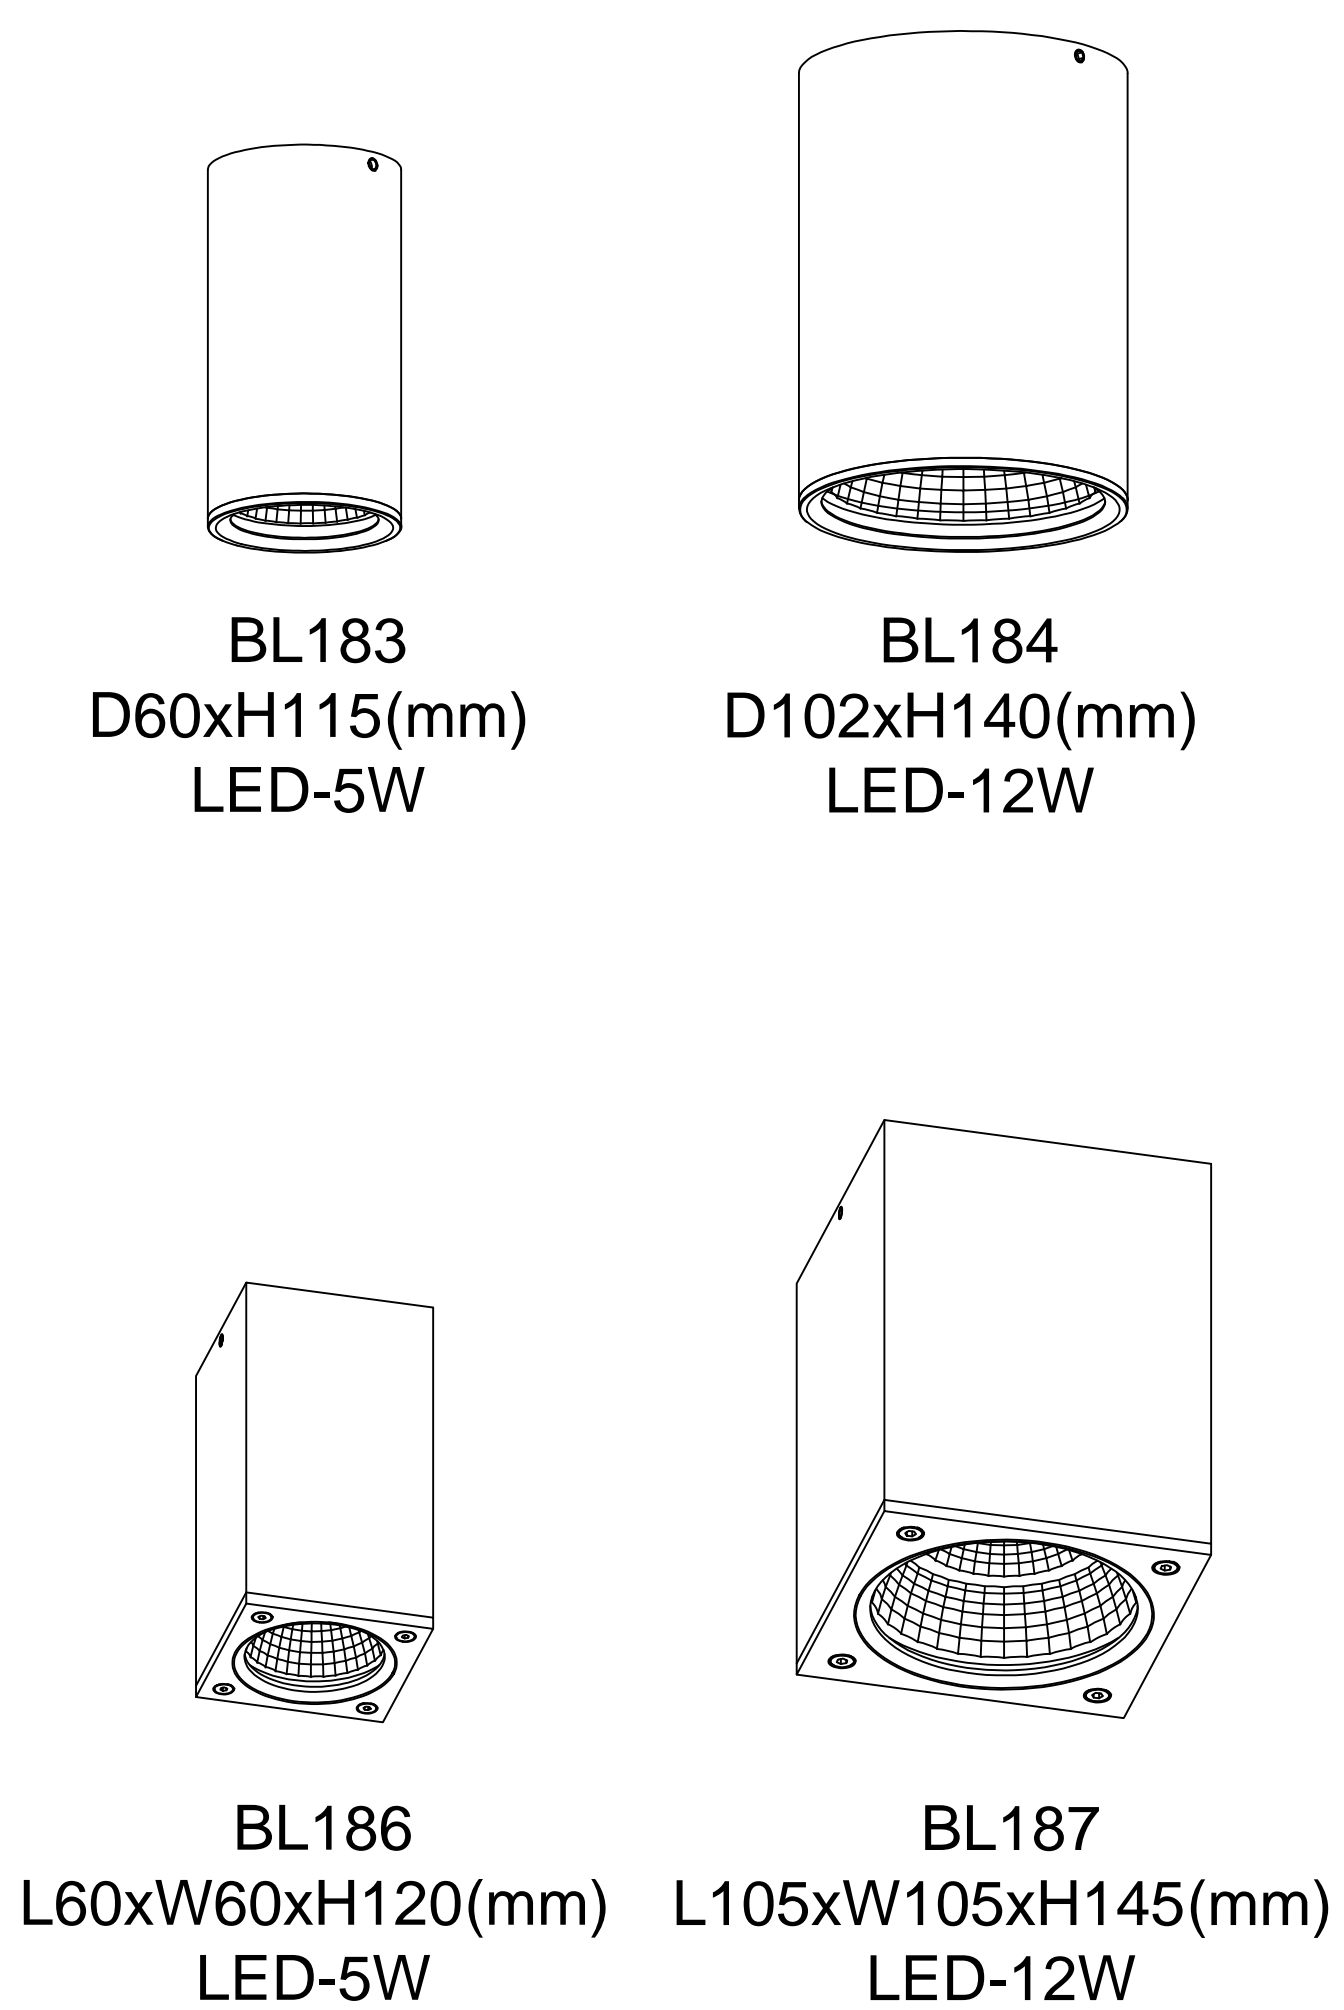

Lamp: CREE COB LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra90
 Input: 100V-240V AC
 Current: Constant 500/300mA
 Frequency: 50/60Hz
 Watt: 5W/12W
 Life span: 40,000hrs
 Operating temp: -20°C--+40°C
 IP65
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied by manufacturer for products guarantee