

BL229

USER MANUAL LED SURFACE DOWNLIGHT






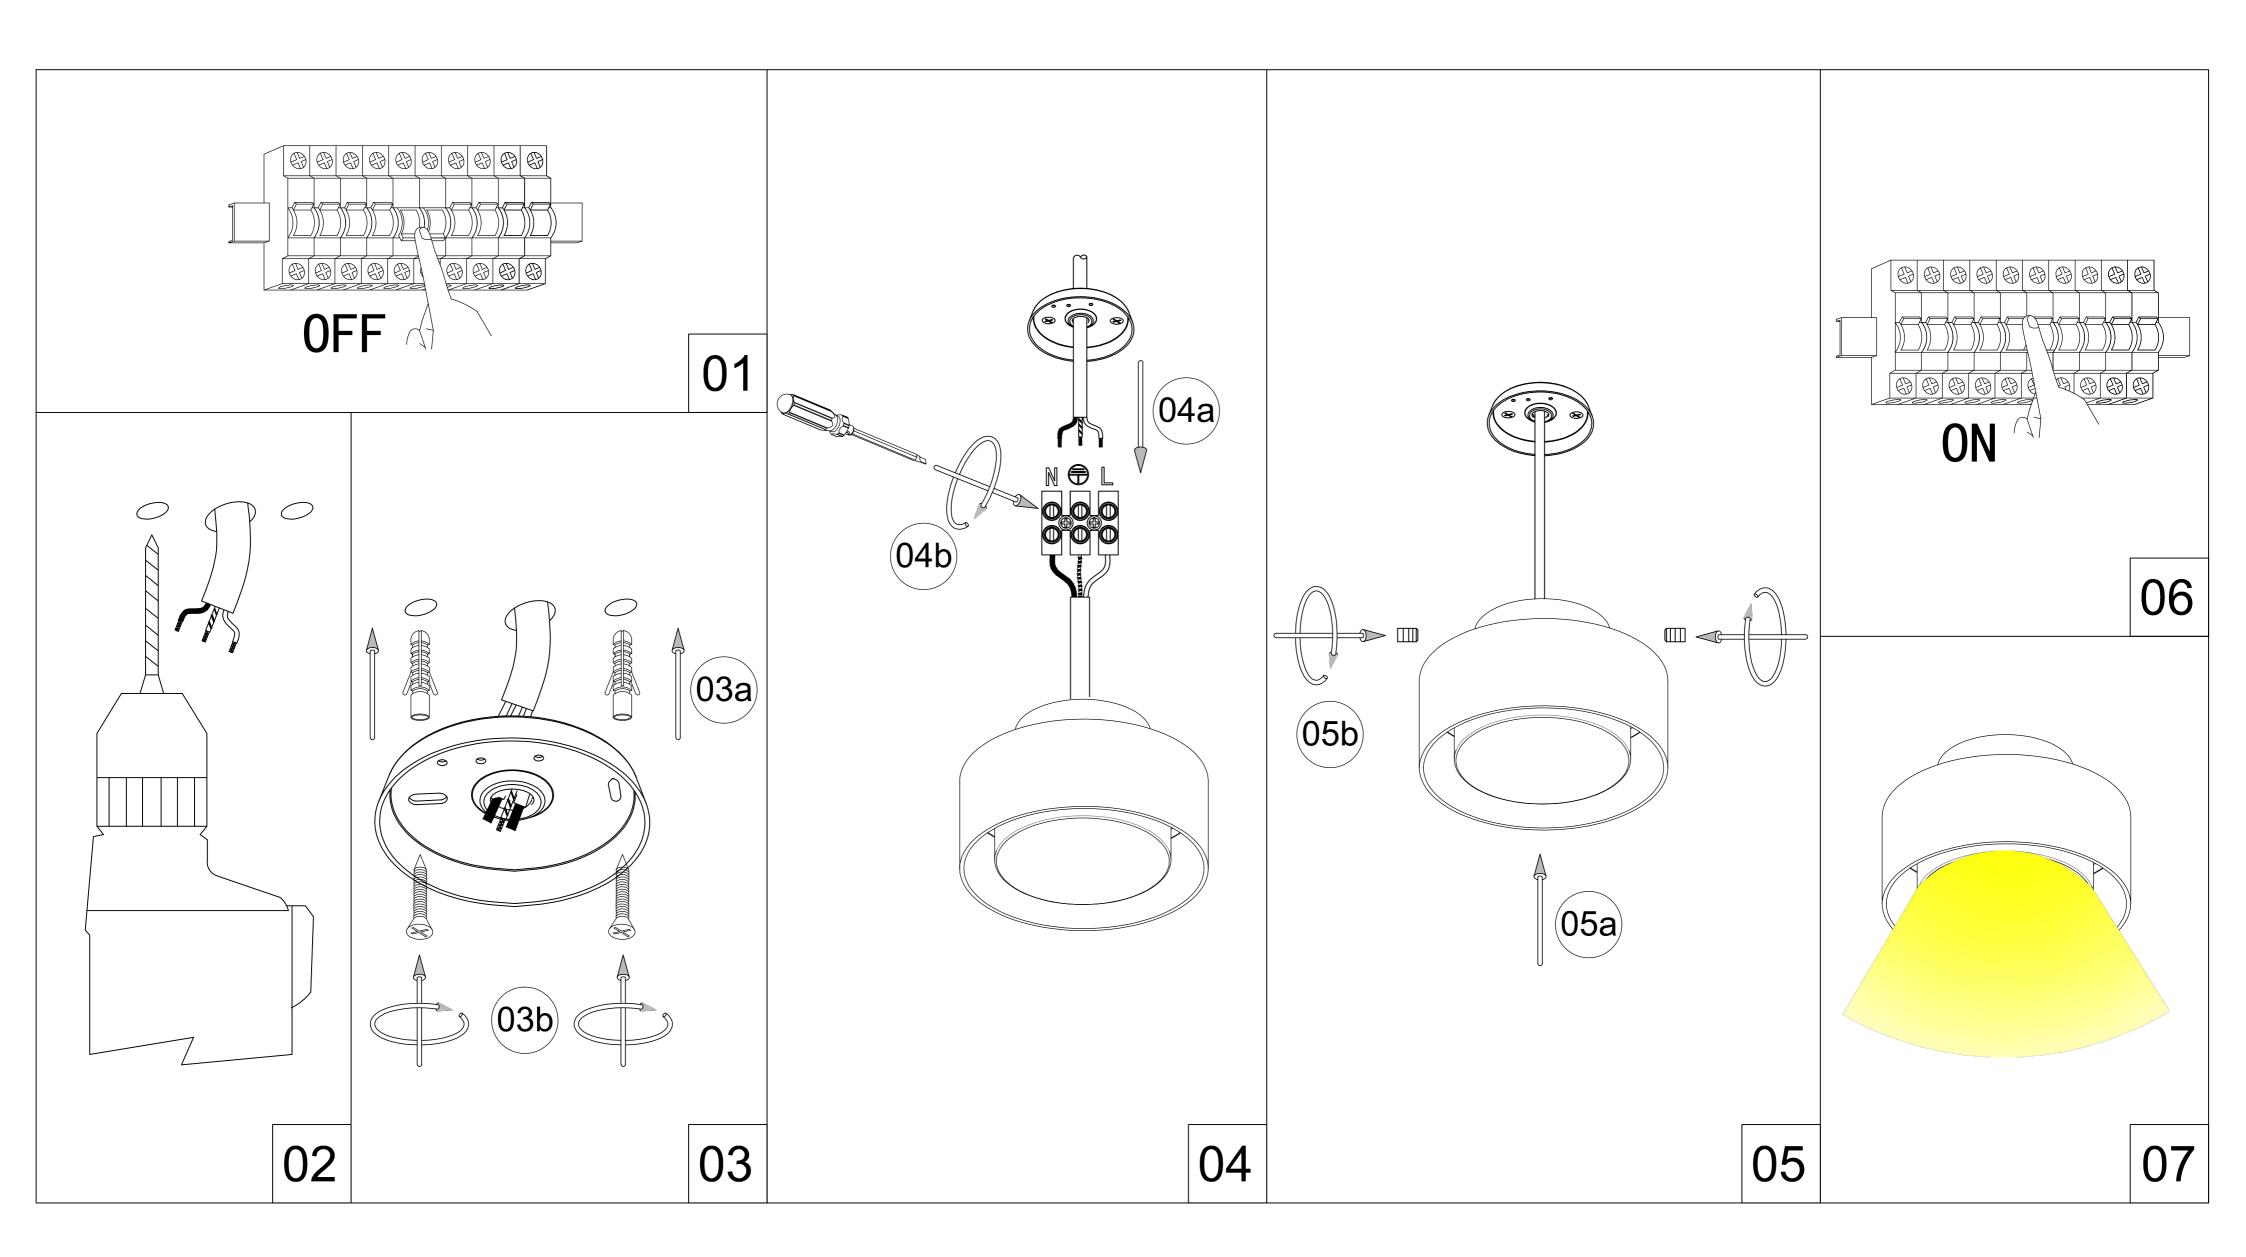










01.SWITCH OFF MAIN
02.MAKE HOLE PATTERN
03.INSTALL THE BASE PLATE
04.CONNECT LAMP TO THE MAIN
05.DRIVE IN THE SCREWS UNTILL TIGHT
06.SWITCH ON THE MAIN AND LIGHT ON



BL229 D148xH93(mm) SMD-6W Lamp:SMD-2835 LED

Color: 2700K/3000K/4000K/6000K

Color rendering: Ra80
Input: 100V-240V AC
Current: Constant 300mA

Frequency: 50/60Hz

Watt: 6W

Life span: 20,000hrs

Operating temp: -20°C-+40°C

Indoor use only

IP20

Dimmable: NO

Cautions: a.Installed by qualified electrician b.Use only power-supply supplied by manufacturer for products guarantee