

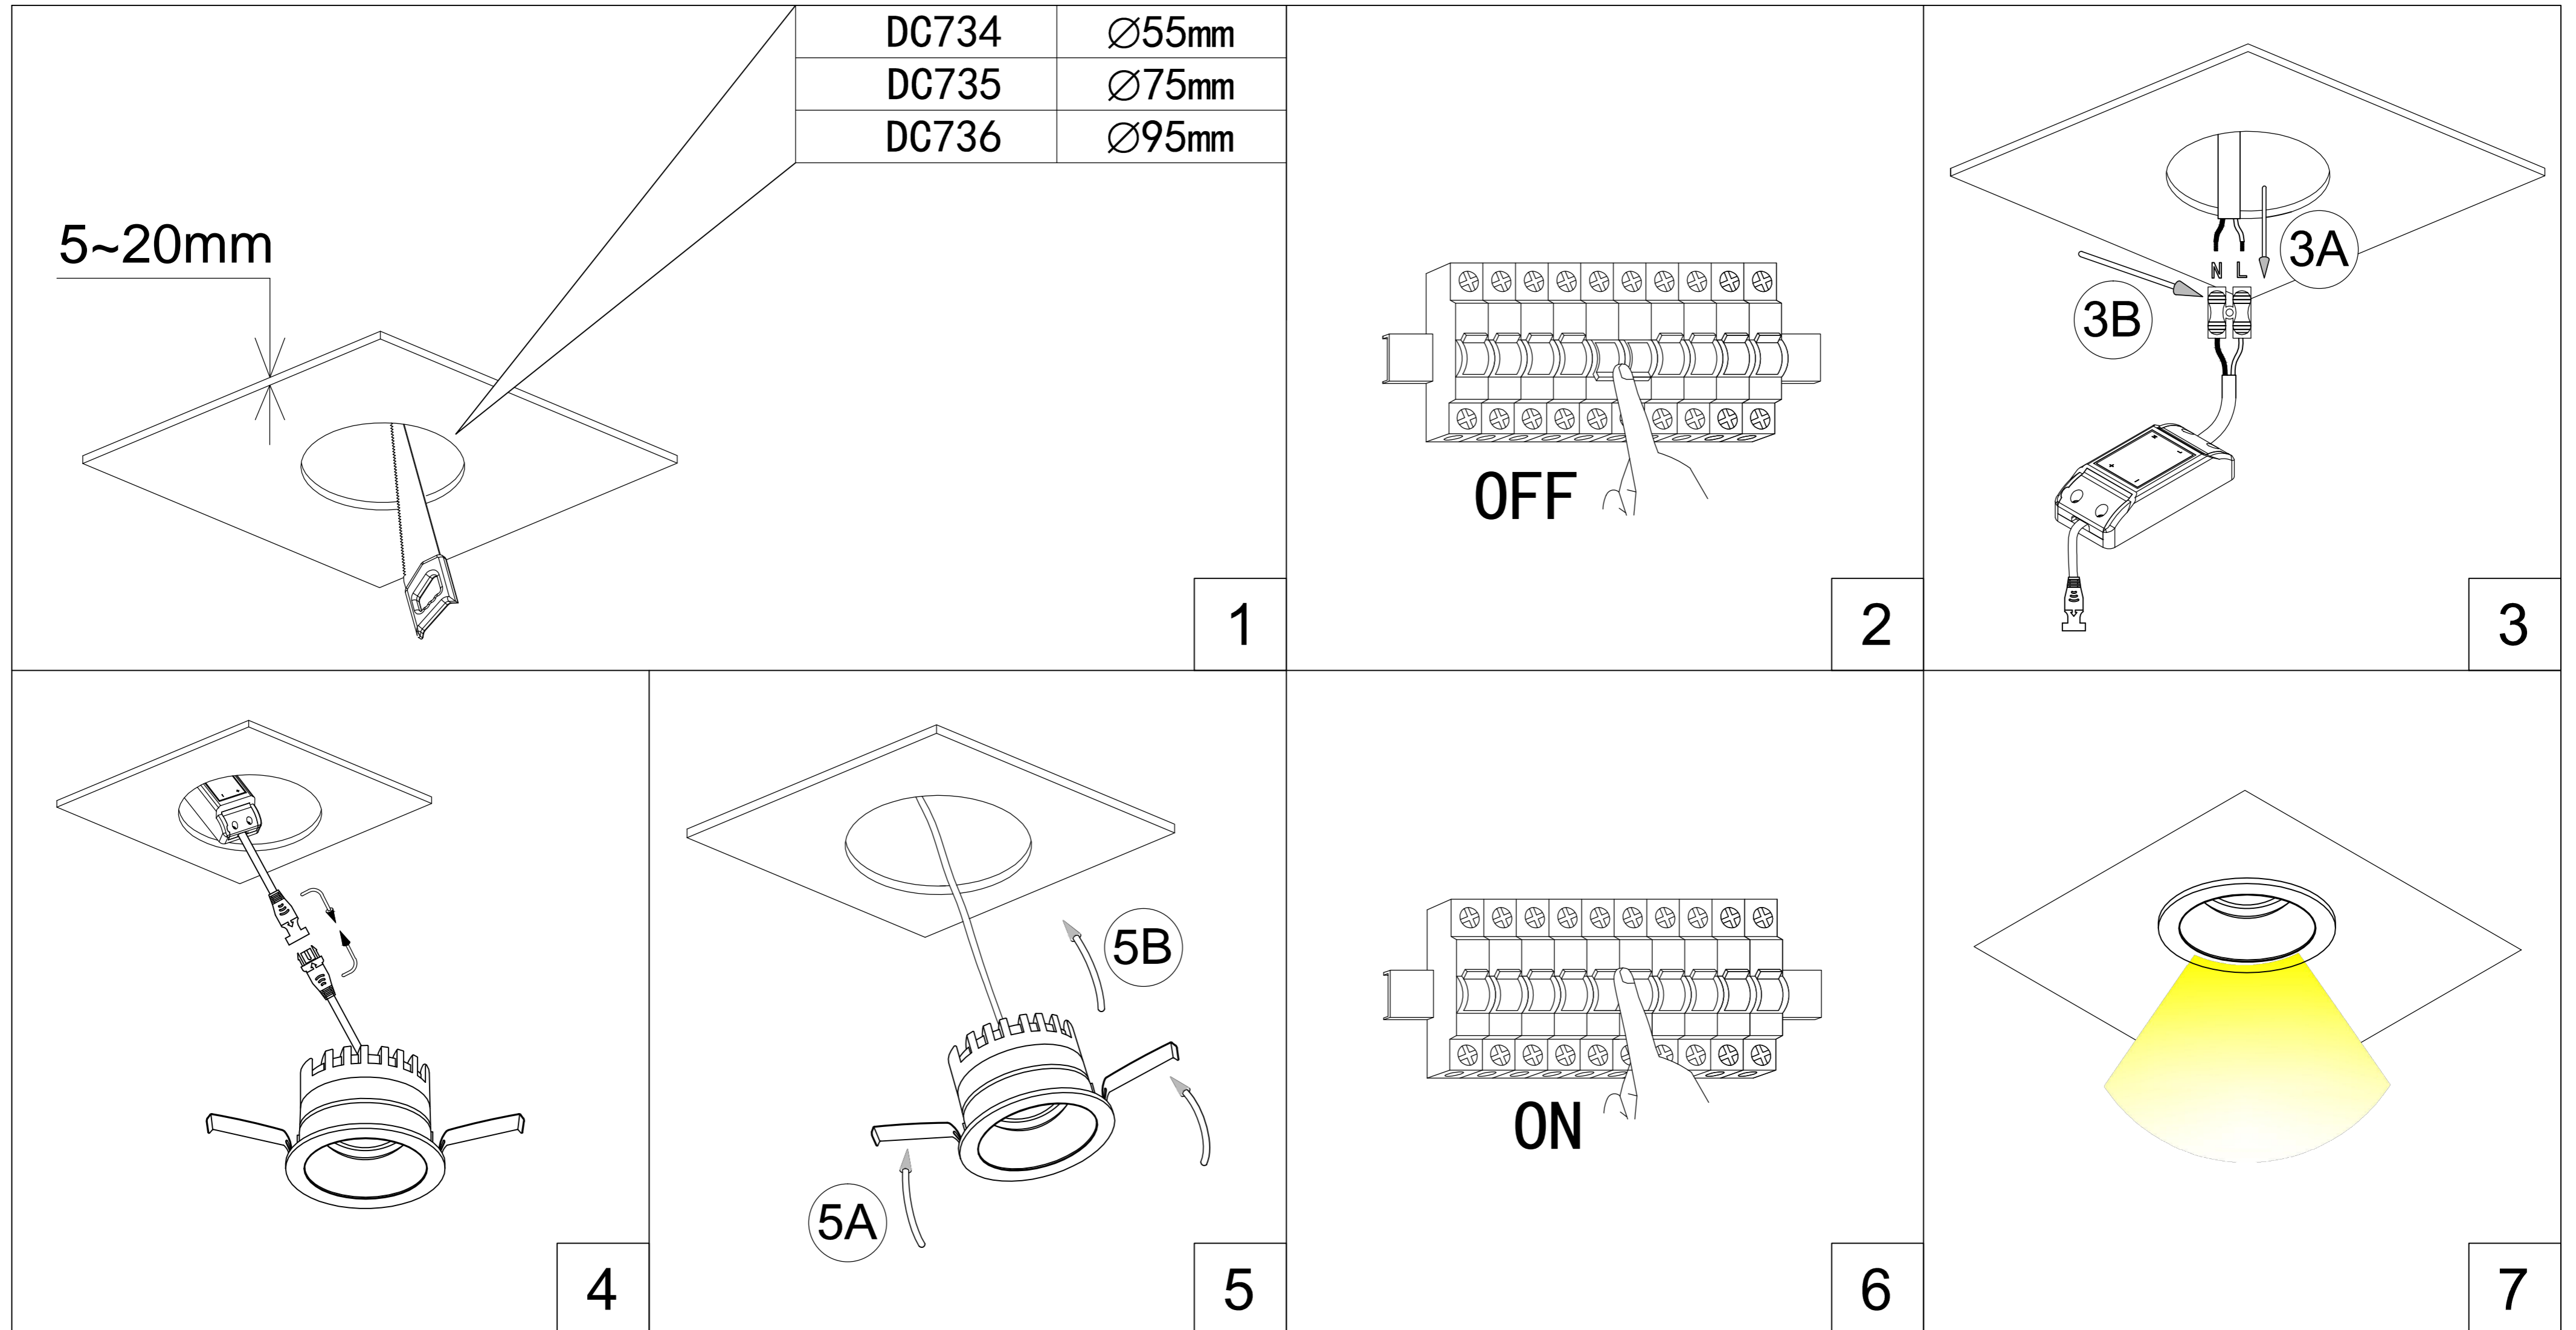
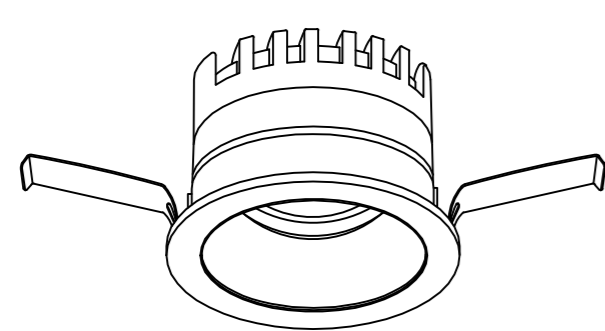





DC734 DC735 DC736


USER MANUAL LED RECESSED SPOTLIGHT




- 01.MAKE HOLE PATTERN
- 02.SWITCH OFF MAIN
- 03.CONNECT POWER-SUPPLY TO THE MAIN
- 04.CONNECT LAMP TO POWER SUPPLY
- 05.HOLD SPRINGS
- 06.PUT LAMP INTO CEILING
- 07.SWITCH ON THE MAIN AND LIGHT ON



DC734
D63xH43(mm)
LED-5W
open:Ø55mm

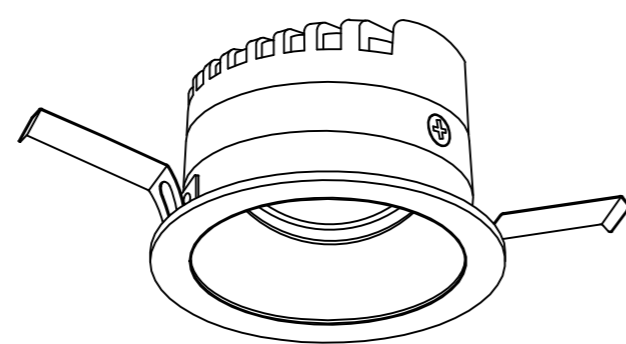

DC735
D85xH49(mm)
LED-9W
open:Ø75mm

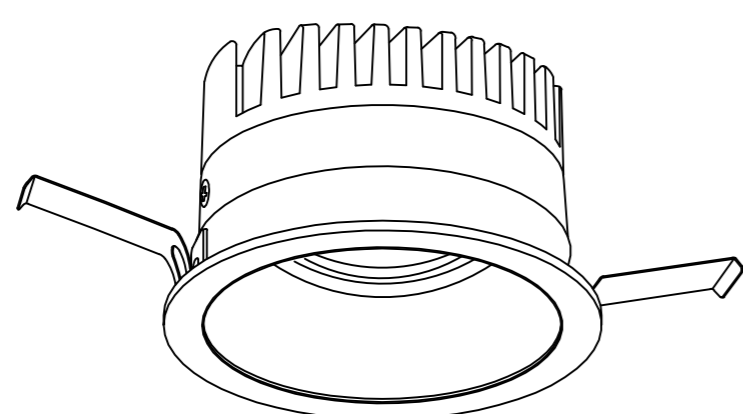

DC736
D105xH63(mm)
LED-15W
open:Ø95mm

Lamp : CREE COB LED
 Color : 2700K/3000K/4000K/6000K
 Color rendering : Ra90
 Input : 220V-240V AC
 Current : Constant 500/250/400mA
 Frequency : 50/60Hz
 Watt : 5W/9W/15W
 Life span : 50,000hrs
 Operating temp : -20°C--+40°C
 IP20
 Dimmable : NO

Cautions: a.Installed by qualified electrician
 b.Use only power-supply supplied
 by manufacturer for products guarantee