









**DC335 DC336  
DC337 DC338**

**USER MANUAL  
LED RECESSED SPOTLIGHT**

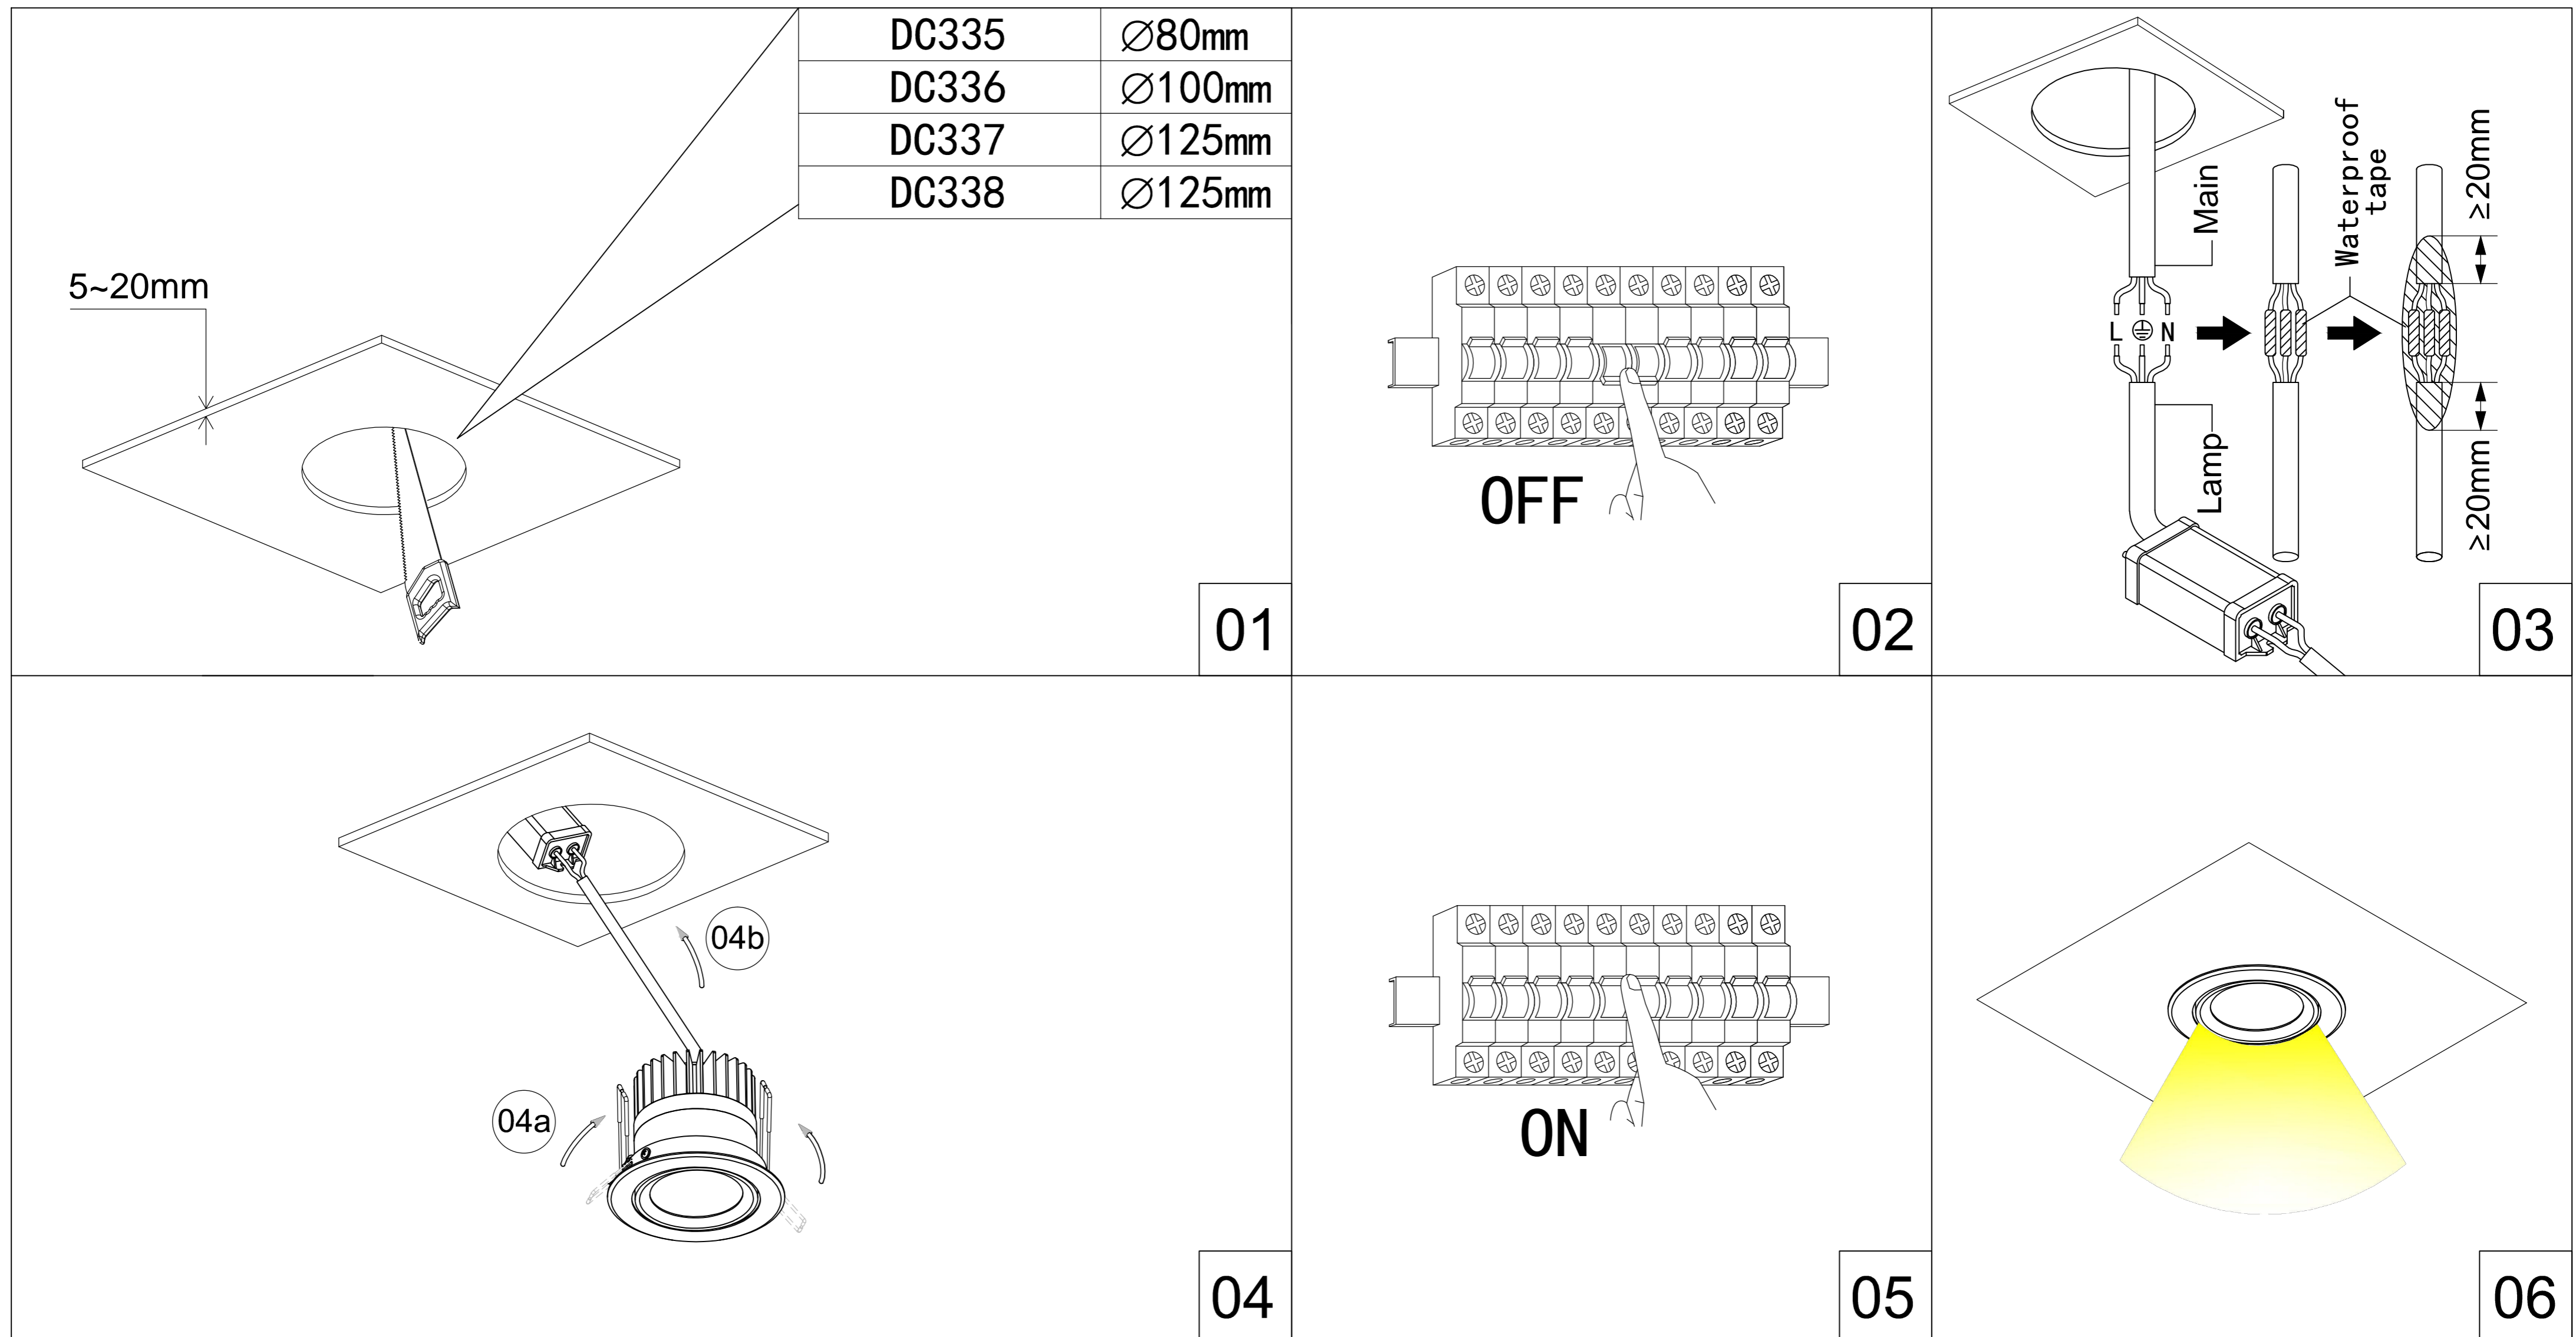

- 01.MAKE HOLE PATTERN
- 02.SWITCH OFF MAIN
- 03.CONNECT POWER-SUPPLY TO THE MAIN
- 04.HOLD SPRINGS
- 05.PUT LAMP INTO CEILING
- 06.SWITCH ON THE MAIN AND LIGHT ON

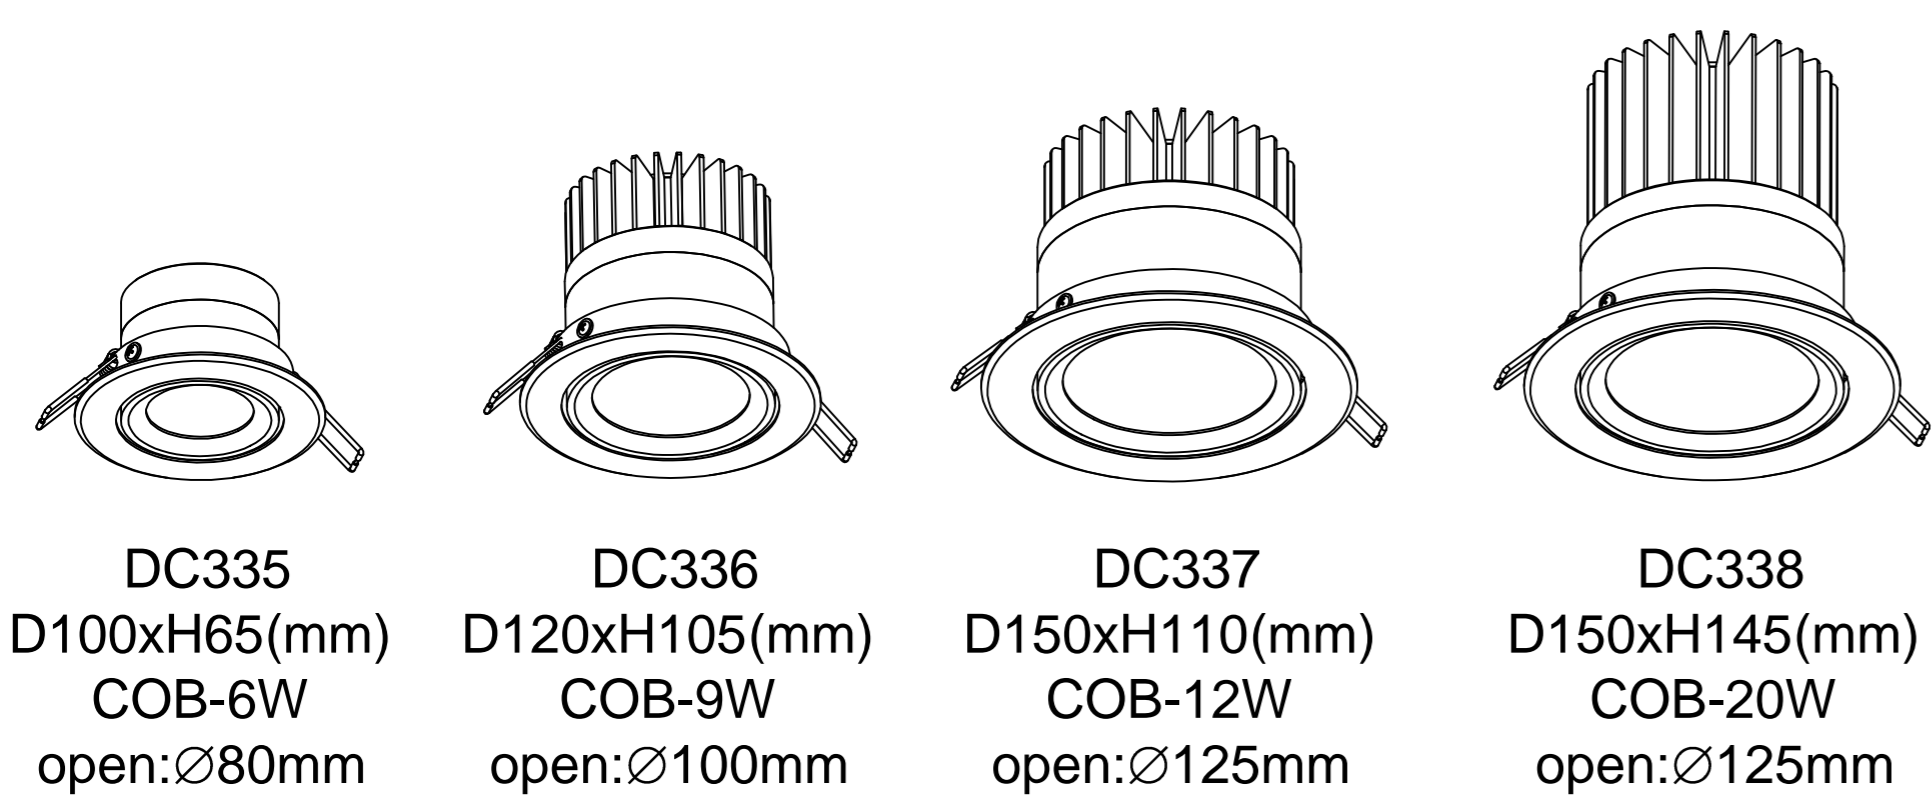

Lamp:CREE COB LED  
 Color: 2700K/3000K/4000K/6000K  
 Color rendering: Ra90  
 Input: 100V-240V AC  
 Current: Constant 250/300/500/600mA  
 Frequency: 50/60Hz  
 Watt: 6W/9W/12W/20W  
 Life span: 40,000hrs  
 Operating temp: -20℃--+40℃  
 IP65  
 Dimmable: NO

Cautions: a.Installed by qualified electrician  
 b.Use only power-supply supplied by manufacturer for products guarantee