








DC411 DC412 DC413


USER MANUAL LED RECESSED SPOTLIGHT

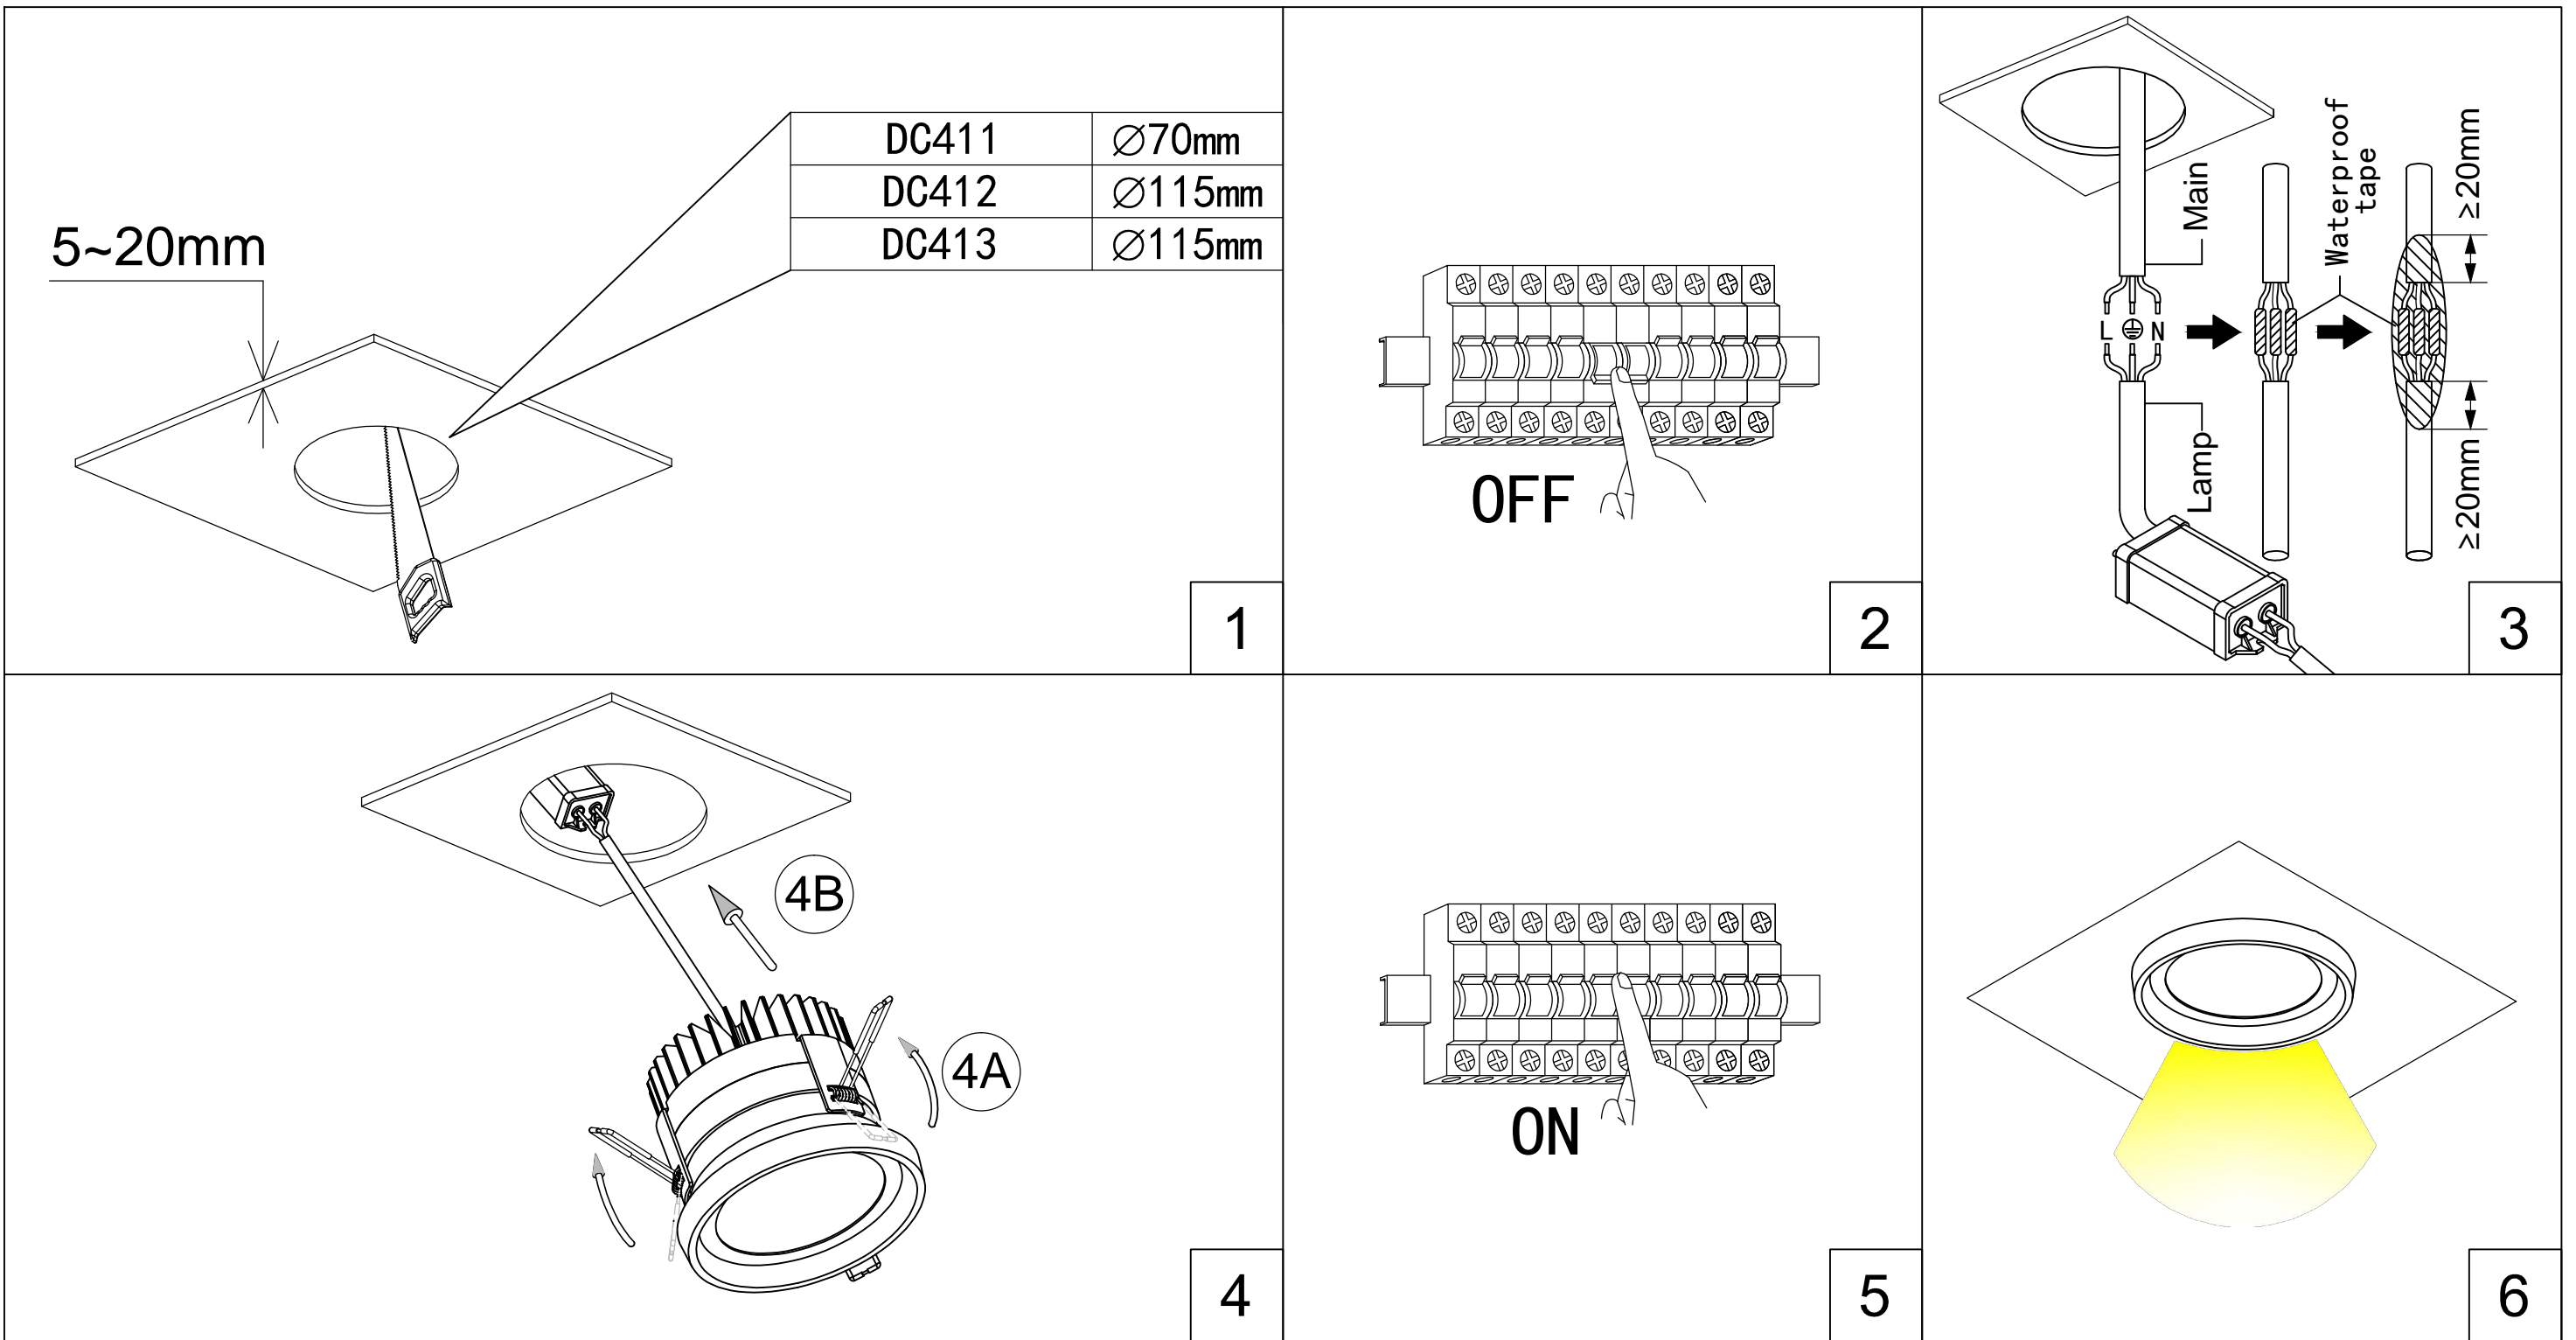


- 01.MAKE HOLE PATTERN
- 02.SWITCH OFF MAIN
- 03.CONNECT POWER-SUPPLY TO THE MAIN
- 04.HOLD SPRINGS
- 05.PUT LAMP INTO CEILING
- 06.SWITCH ON THE MAIN AND LIGHT ON



DC411
D78xH63(mm)
LED-6W
open:Ø70mm

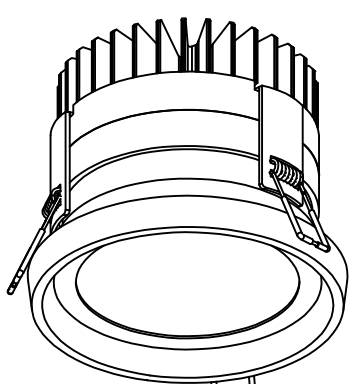

DC412
D123xH100(mm)
LED-12W
open:Ø115mm

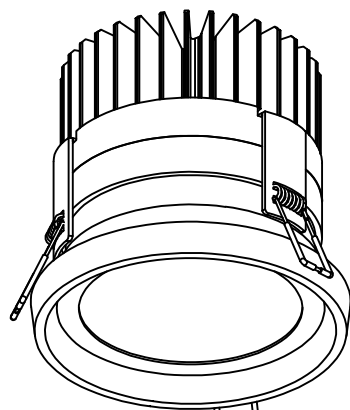

DC413
D123xH115(mm)
LED-24W
open:Ø115mm

Lamp : CREE COB LED
 Color : 2700K/3000K/4000K/6000K
 Color rendering : Ra90
 Input : 100V-240V AC
 Current : Constant 600mA/300mA
 Frequency : 50/60Hz
 Watt : 6W/12W/24W
 Life span : 40,000hrs
 Operating temp : -20°C--+40°C
 IP65
 Dimmable : NO

Cautions: a.Installed by qualified electrician
 b.Use only power-supply supplied
 by manufacturer for products guarantee