








DC425 DC426 DC427
 DC430 DC431 DC432
 DC435 DC436 DC437

USER MANUAL


LED RECESSED SPOTLIGHT

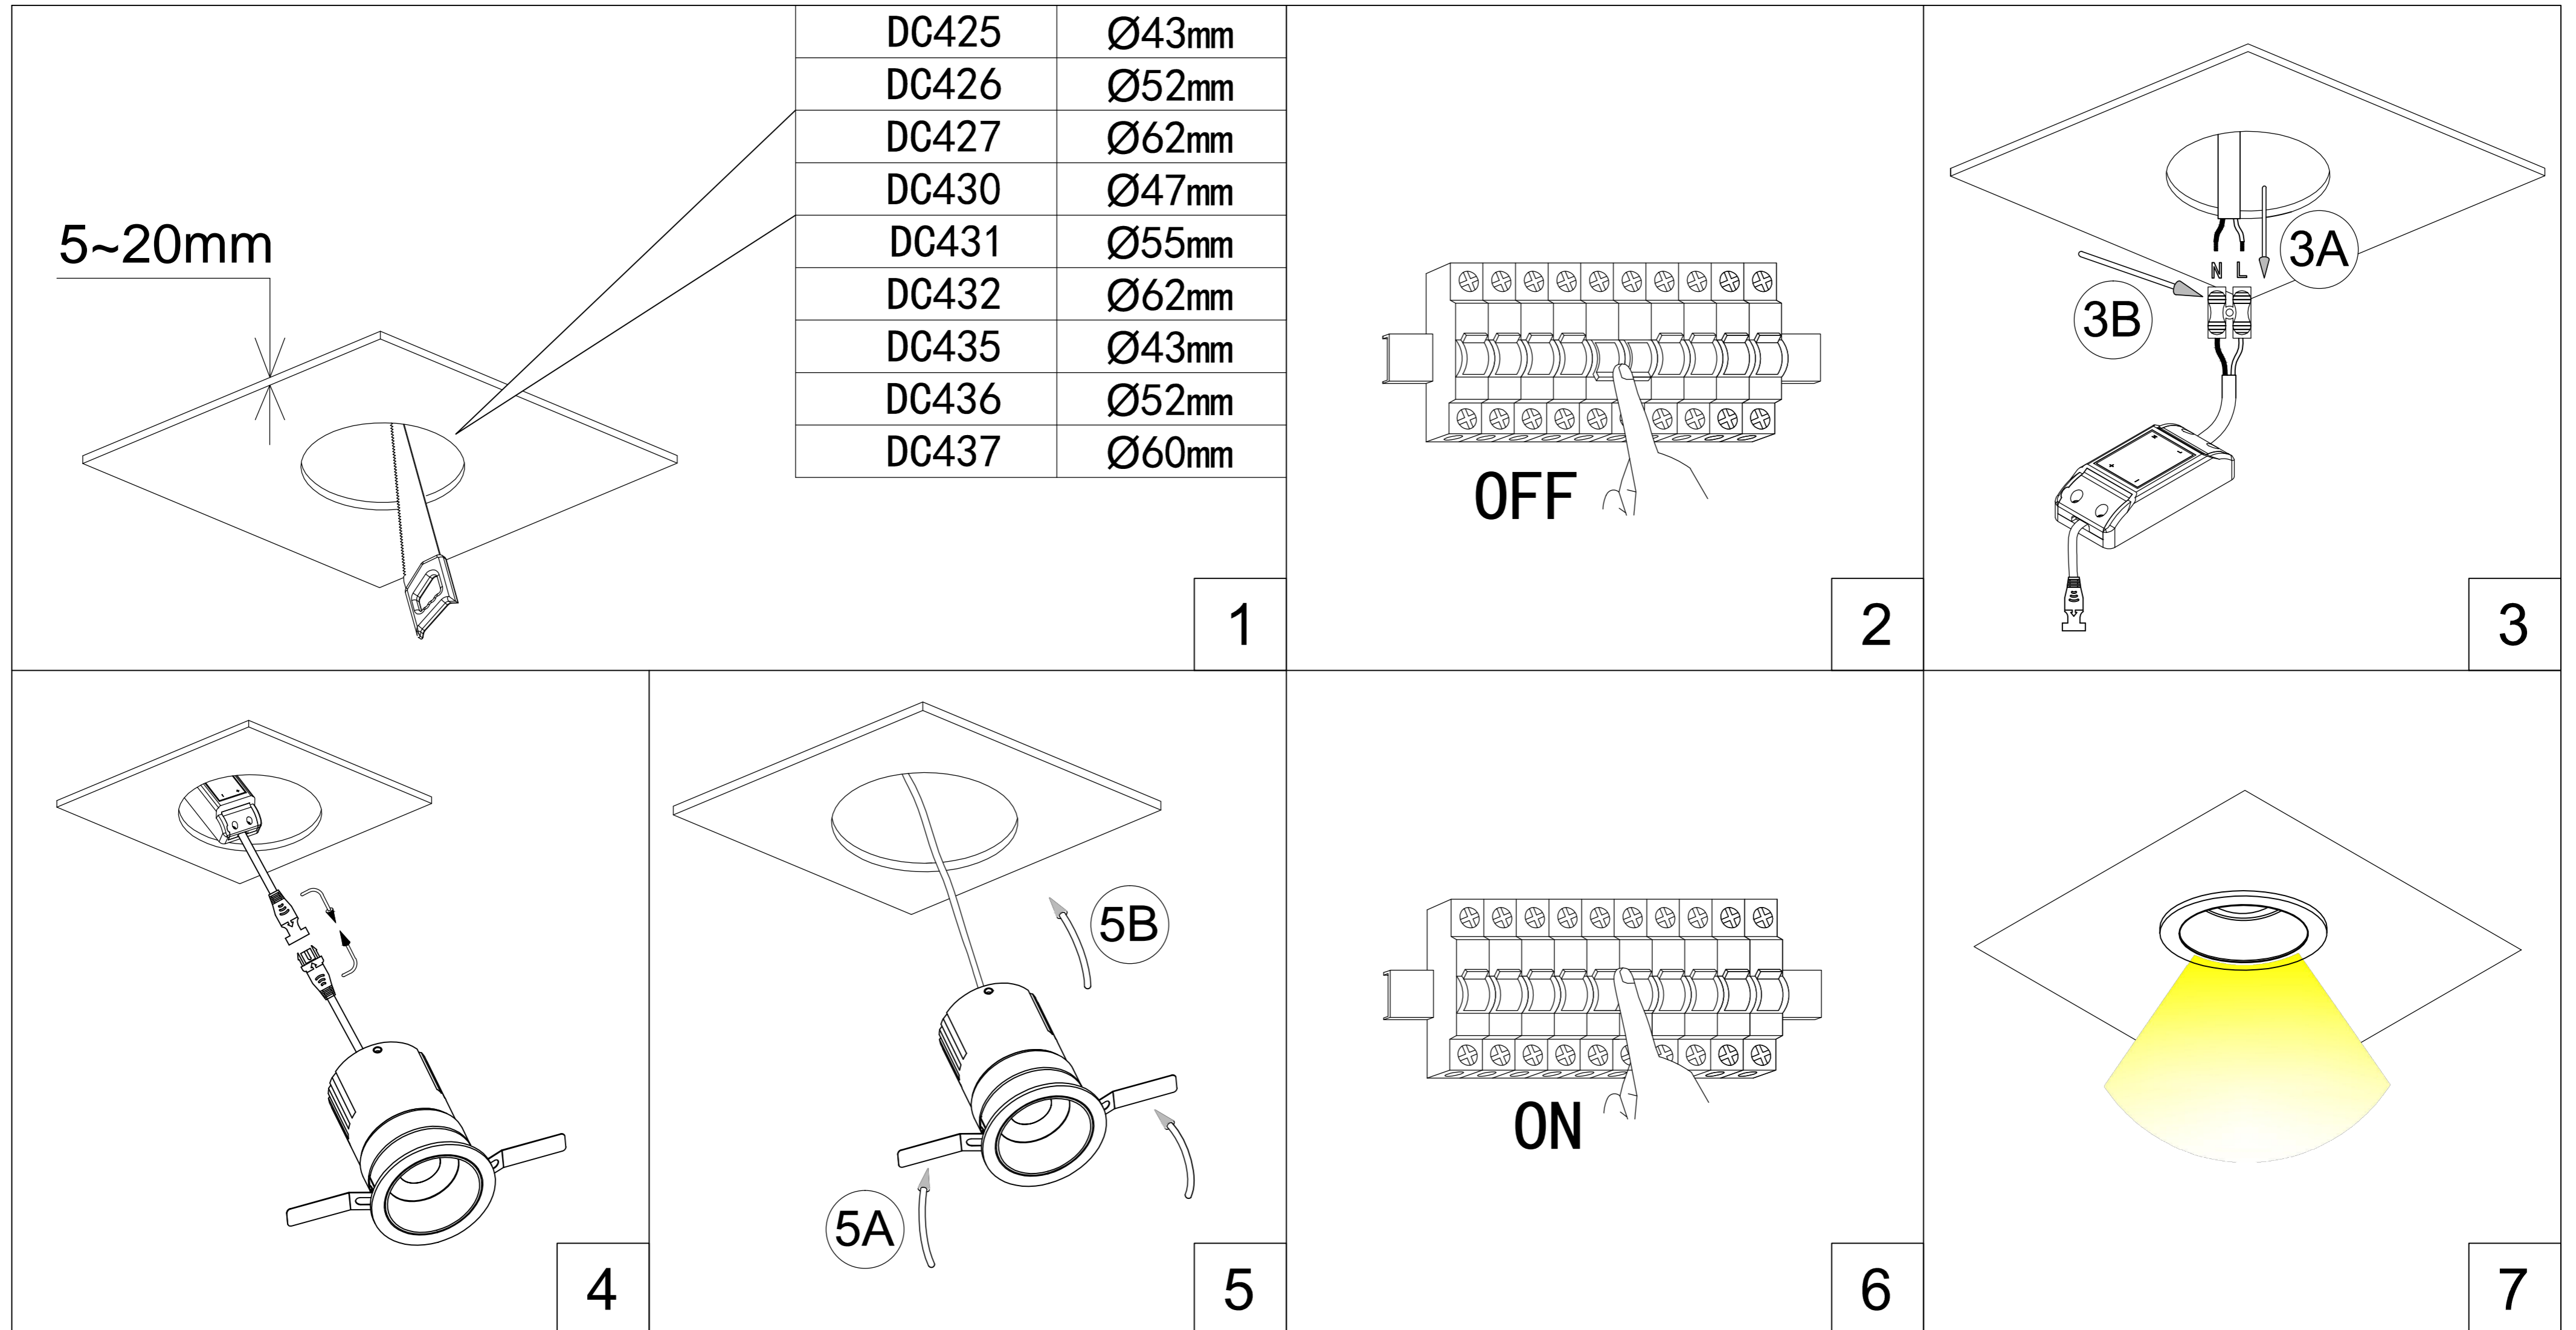


- 01.MAKE HOLE PATTERN
- 02.SWITCH OFF MAIN
- 03.CONNECT POWER-SUPPLY TO THE MAIN
- 04.CONNECT LAMP TO POWER SUPPLY
- 05.HOLD SPRINGS
- 06.PUT LAMP INTO CEILING
- 07.SWITCH ON THE MAIN AND LIGHT ON

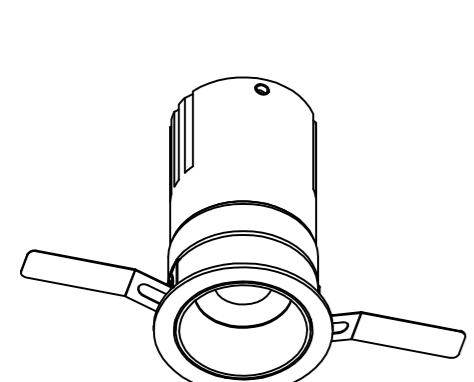


DC425
 D49xH80(mm)
 LED-7W
 open:Ø43mm

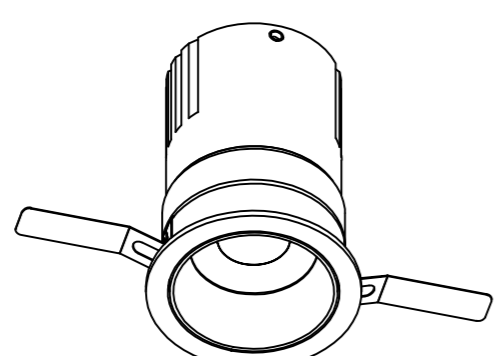


DC426
 D59xH82(mm)
 LED-9W
 open:Ø52mm

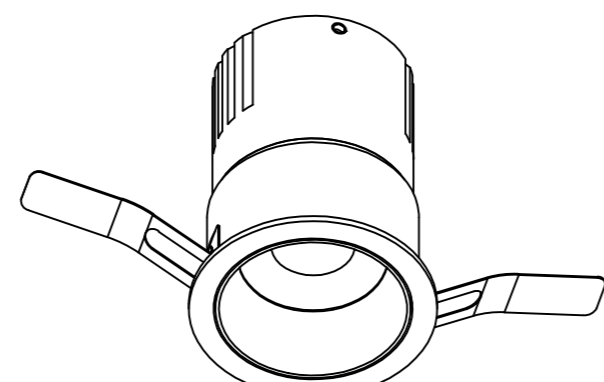


DC427
 D68xH88(mm)
 LED-12W
 open:Ø62mm

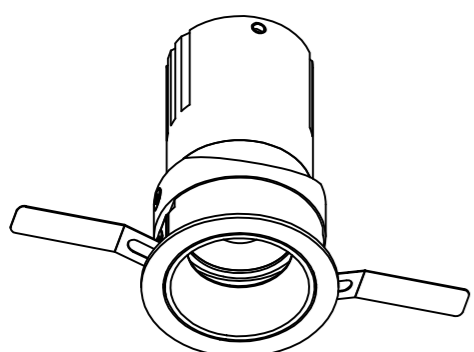


DC430
 D54xH87(mm)
 LED-7W
 open:Ø47mm

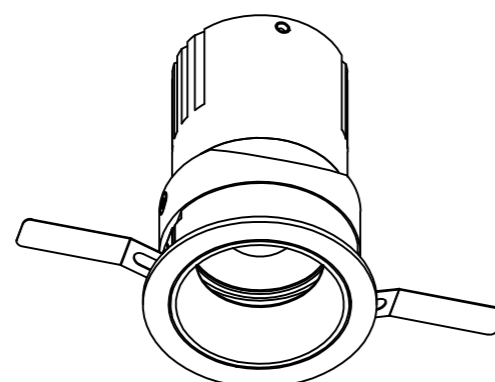


DC431
 D64xH90(mm)
 LED-9W
 open:Ø55mm

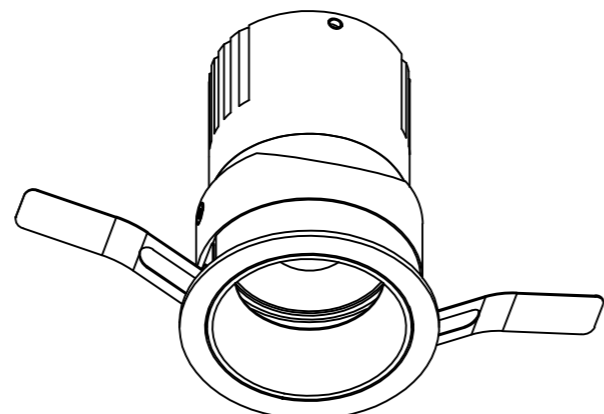


DC432
 D71xH97(mm)
 LED-12W
 open:Ø62mm

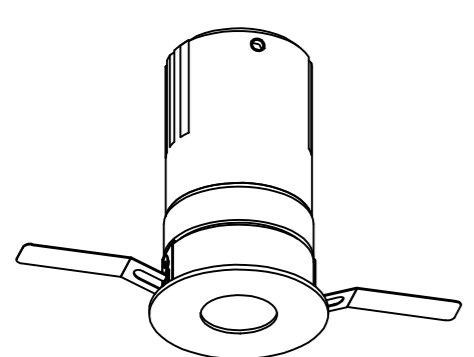

DC435
 D49xH80(mm)
 LED-7W
 open:Ø43mm

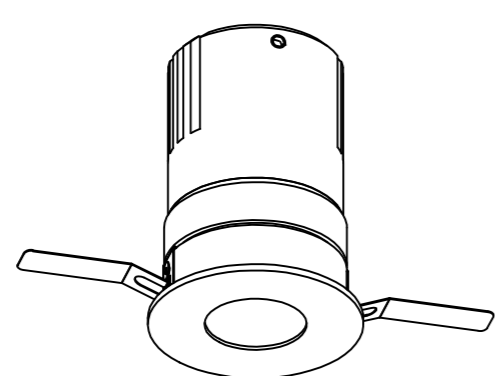

DC436
 D59xH82(mm)
 LED-9W
 open:Ø52mm

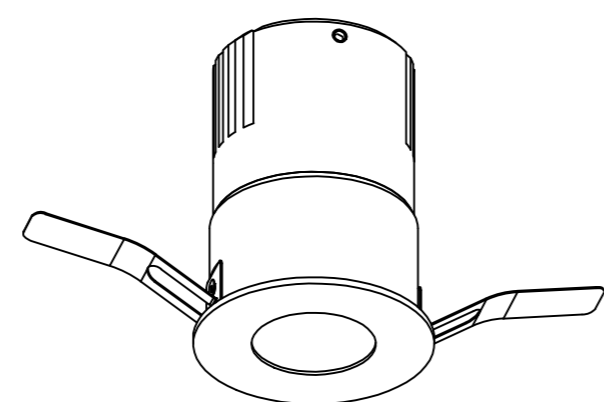

DC437
 D66xH88(mm)
 LED-12W
 open:Ø60mm

Lamp: CREE COB LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra90
 Input: 220V-240V AC
 Current: Constant 700/250/300mA
 Frequency: 50/60Hz
 Watt: 7W/9W/12W
 Life span: 50,000hrs
 Operating temp: -20°C--+40°C
 IP20
 Dimmable: NO

Cautions: a.Installed by qualified electrician
 b.Use only power-supply supplied by manufacturer for products guarantee