

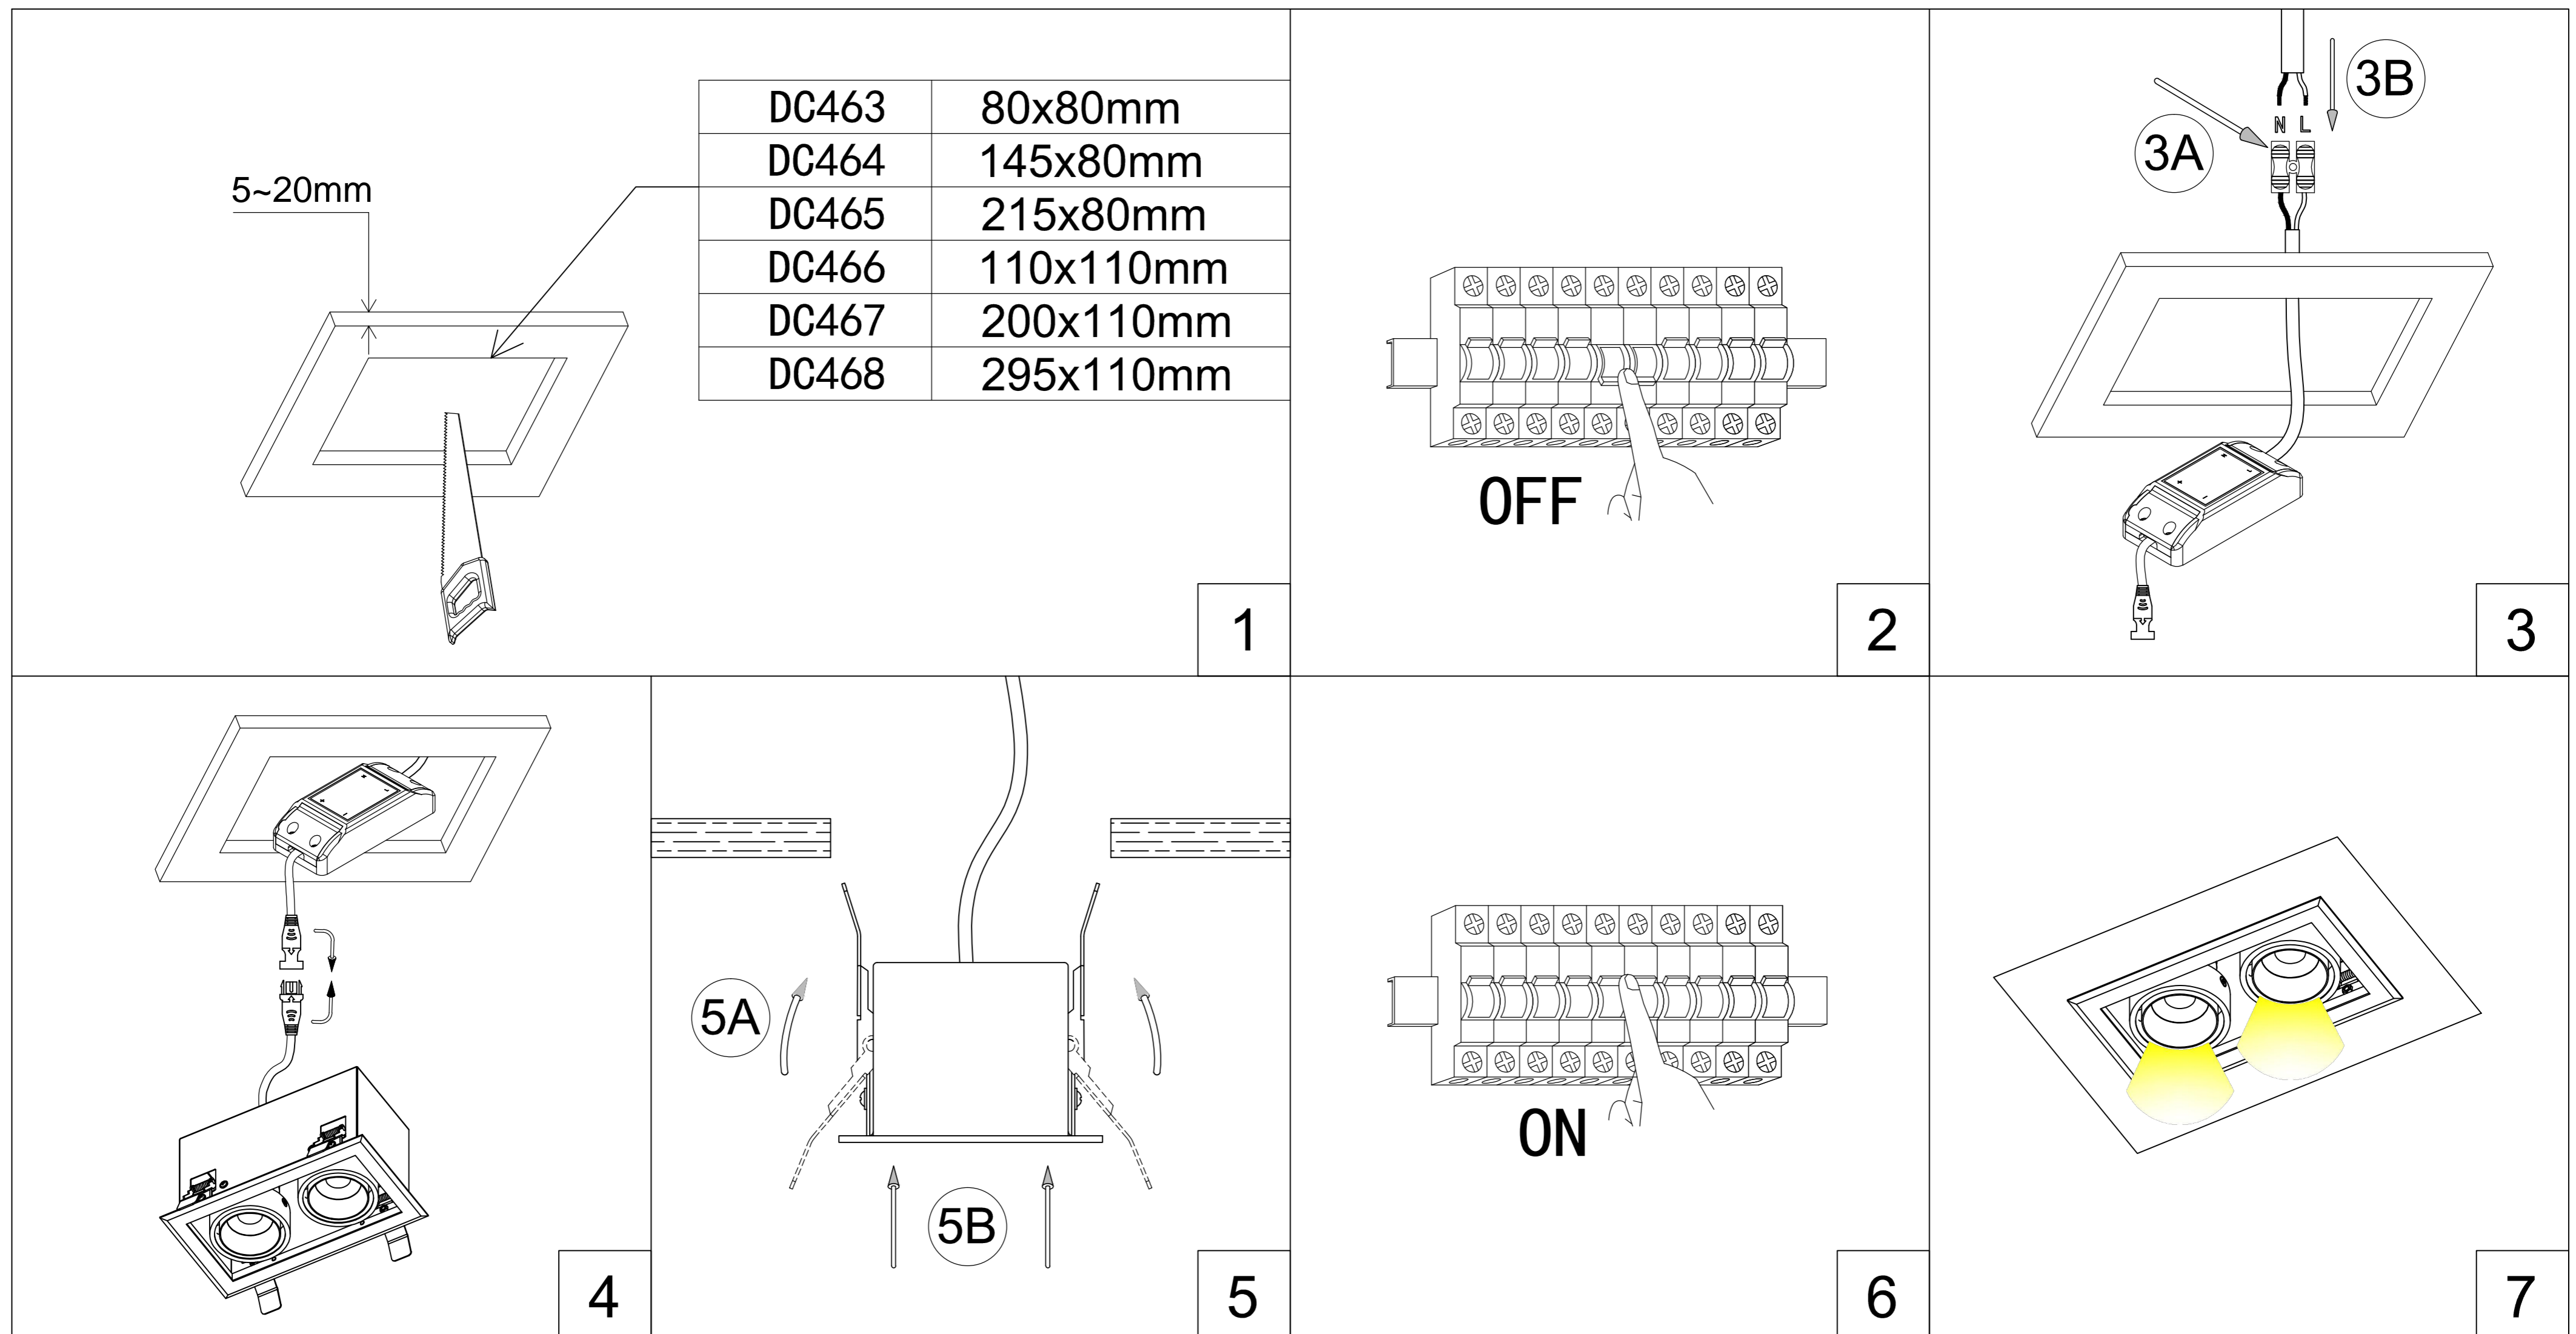
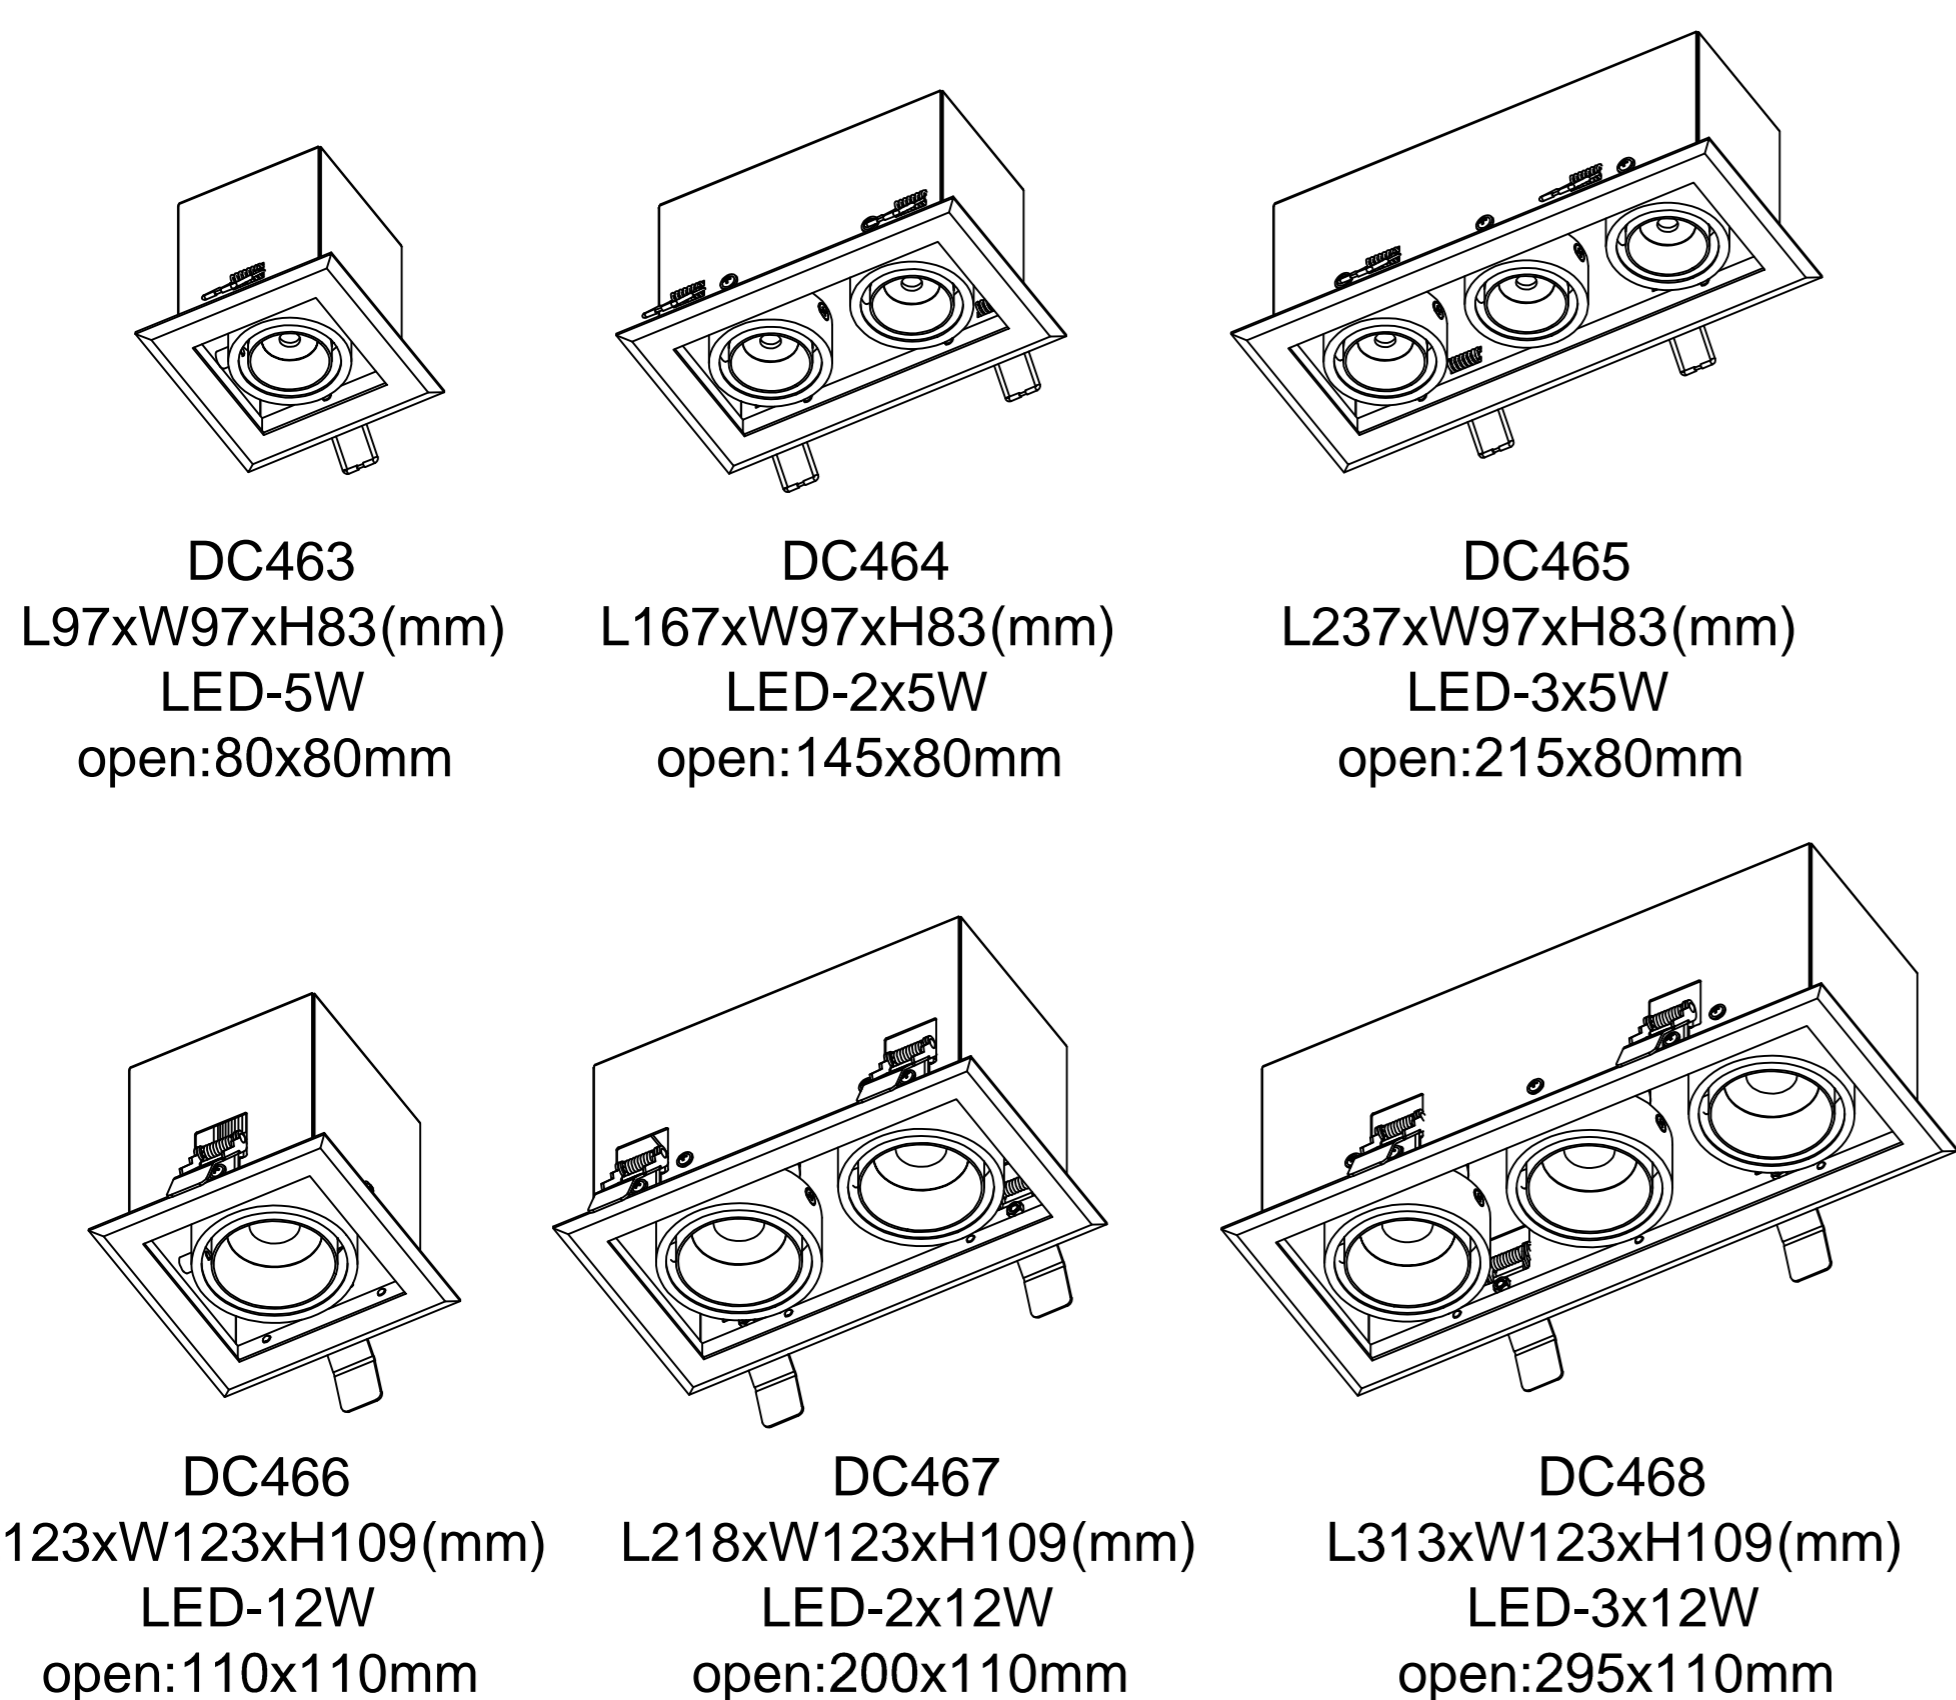





**DC463 DC464 DC465  
DC466 DC467 DC468**

**USER MANUAL  
LED RECESSED SPOTLIGHT**



- 01.MAKE HOLE PATTERN
- 02.SWITCH OFF MAIN
- 03.CONNECT POWER-SUPPLY TO THE MAIN
- 04.CONNECT LAMP TO POWER SUPPLY
- 05.HOLD SPRINGS
- 06.PUT LAMP INTO CEILING
- 07.ADJUST BEAMING
- 08.SWITCH ON THE MAIN AND LIGHT ON



Lamp : CREE COB LED  
 Color : 2700K/3000K/4000K/6000K  
 Color rendering : Ra90  
 Input : 220V-240V AC  
 Current : Constant 500/300/900mA  
 Frequency : 50/60Hz  
 Watt : 5W/2x5W/3x5W/12W/2x12W/3x12W  
 Life span : 50,000hrs  
 Operating temp : -20°C--+40°C  
 IP20  
 Dimmable : NO

Cautions: a.Installed by qualified electrician  
 b.Use only power-supply supplied  
 by manufacturer for products guarantee