




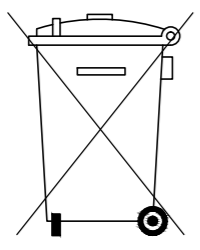



DC730
DC732

DC731
DC733


USER MANUAL
LED RECESSED SPOTLIGHT

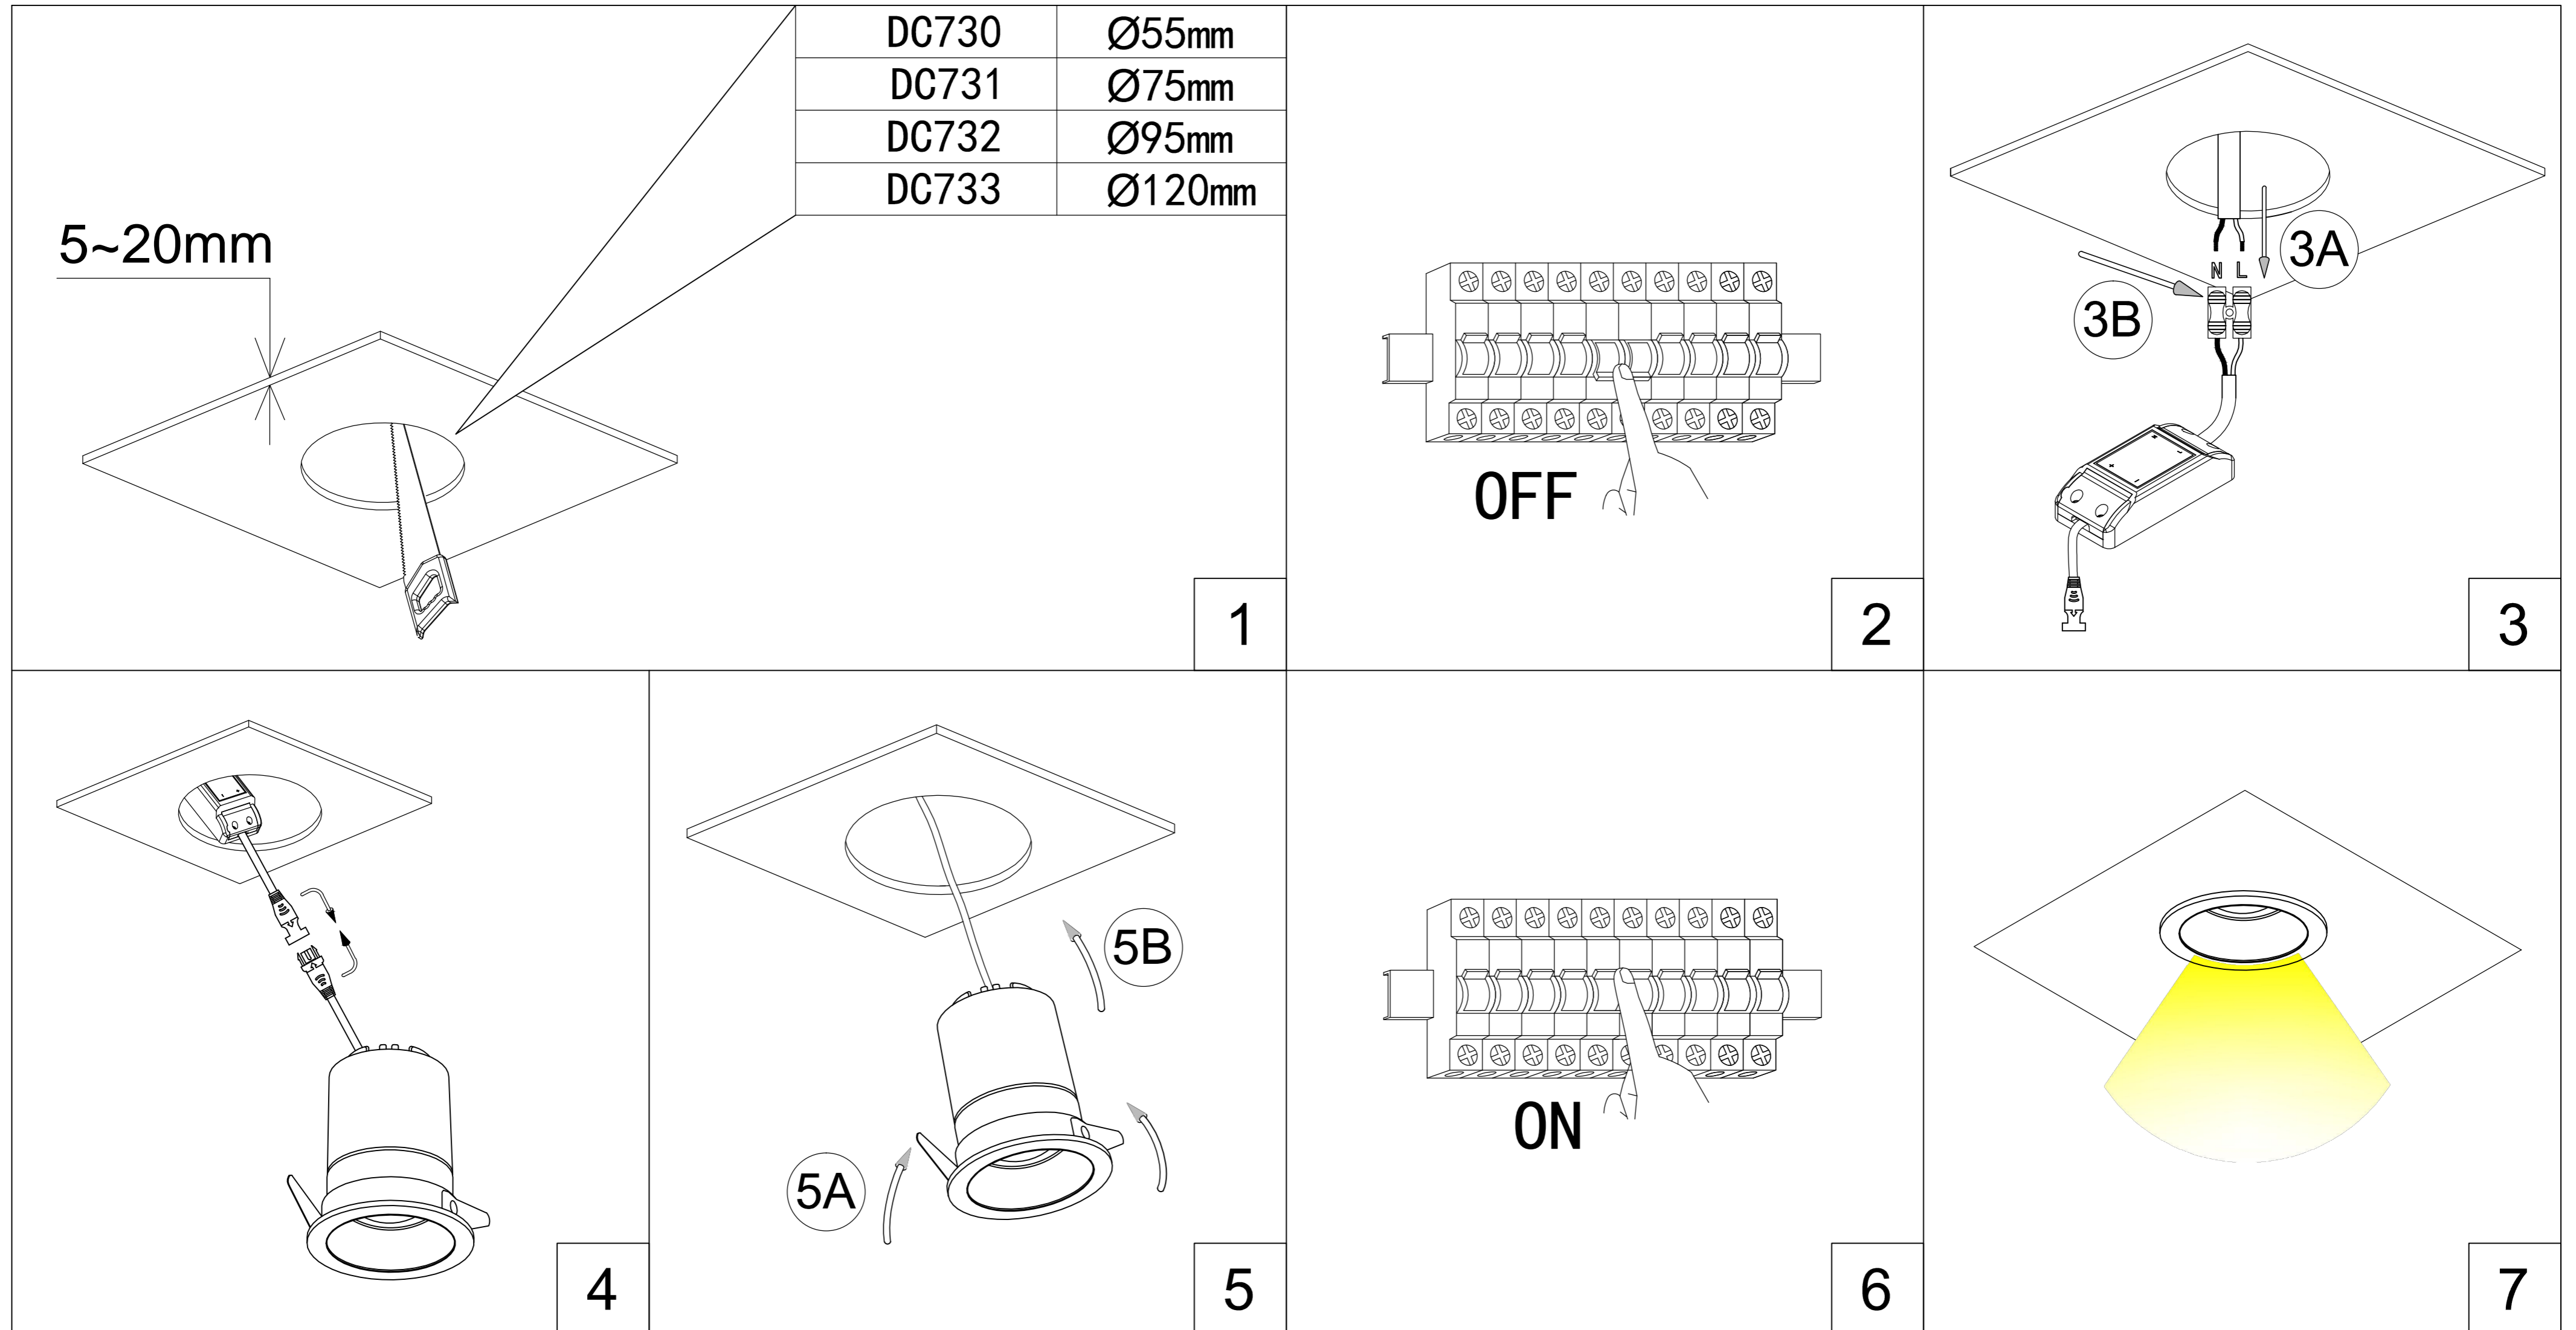


- 01.MAKE HOLE PATTERN
- 02.SWITCH OFF MAIN
- 03.CONNECT POWER-SUPPLY TO THE MAIN
- 04.CONNECT LAMP TO POWER SUPPLY
- 05.HOLD SPRINGS
- 06.PUT LAMP INTO CEILING
- 07.SWITCH ON THE MAIN AND LIGHT ON

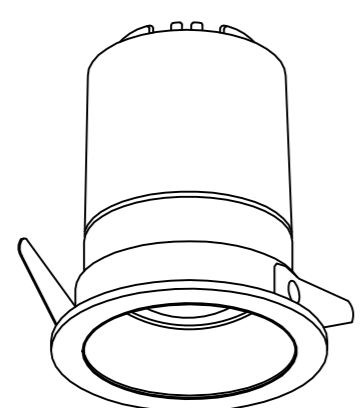


DC730
D63xH78(mm)
LED-5W
open:Ø55mm

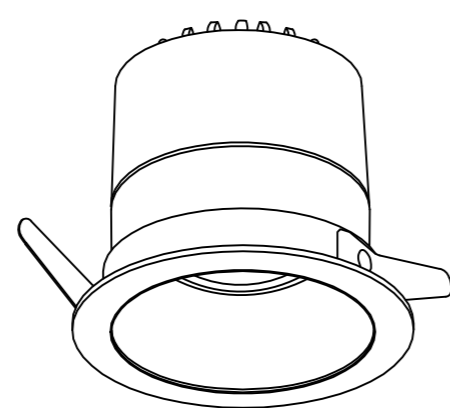

DC731
D85xH71(mm)
LED-12W
open:Ø75mm

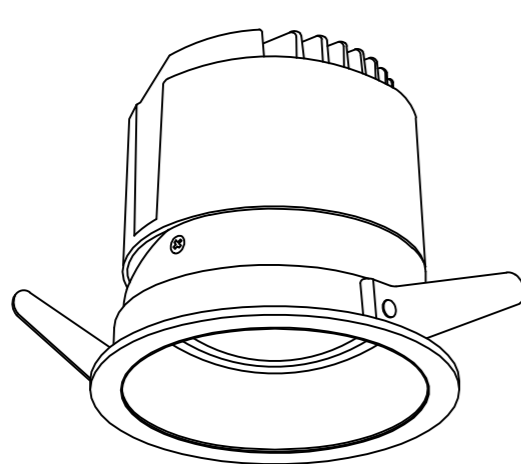

DC732
D105xH99(mm)
LED-20W
open:Ø95mm

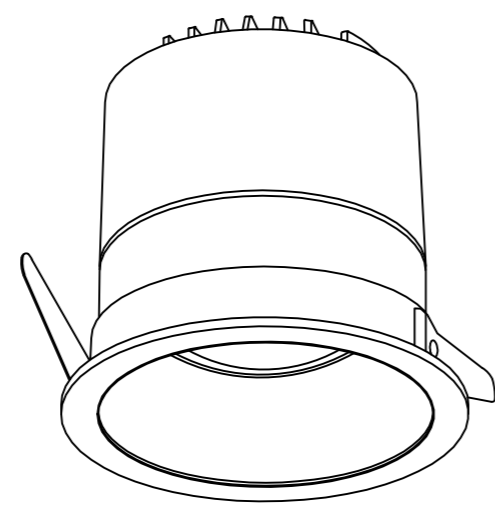

DC733
D130xH115(mm)
LED-30W
open:Ø120mm

Lamp : CREE COB LED
 Color : 2700K/3000K/4000K/6000K
 Color rendering : Ra90
 Input : 220V-240V AC
 Current : Constant 500/300/500/700mA
 Frequency : 50/60Hz
 Watt : 5W/12W/20W/30W
 Life span : 50,000hrs
 Operating temp : -20°C--+40°C
 IP20
 Dimmable : NO

Cautions: a.Installed by qualified electrician
 b.Use only power-supply supplied by manufacturer for products guarantee