
DC880A


USER MANUAL LED RECESSED DOWNLIGHT









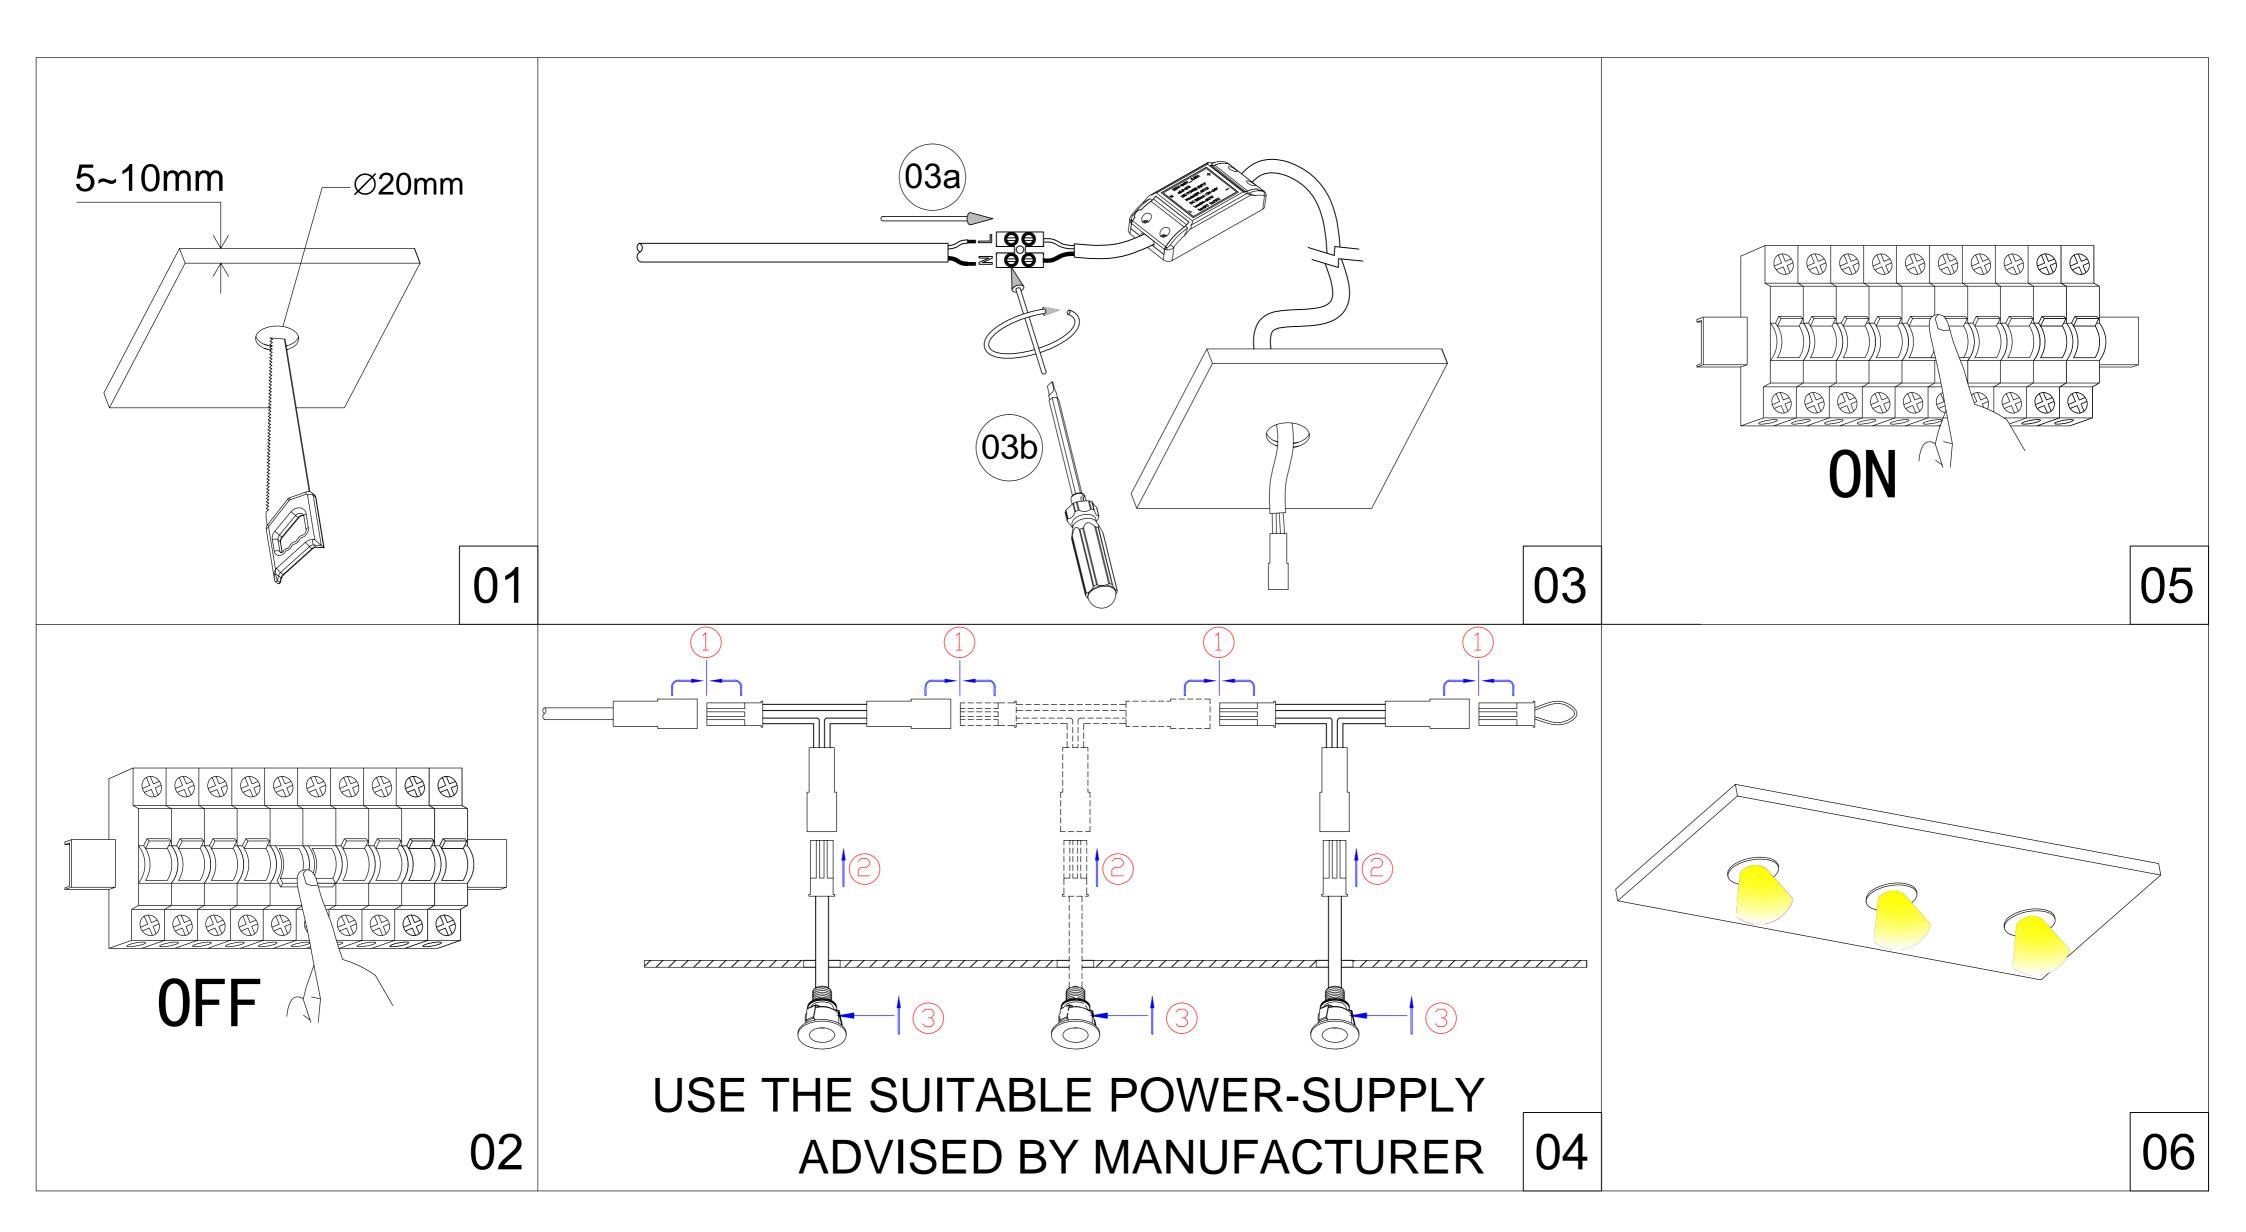










01.MAKE HOLE PATTERN
02.SWITCH OFF MAIN
03.PUT THE LAMP EACH BY EACH INTO THE
CEILING AND CONNECT EACH OTHER
AS DRAWING SHOWS
04.CONNECT POWER-SUPPLY TO THE MAIN
05.CONNECT THE LAMP TO POWER SUPPLY
06.SWITCH ON THE MAIN AND LIGHT ON



DC880A

D23xH29(mm)

Lamp:CREE XPE LED

Color: 2700K/3000K/4000K/6000K

Color rendering: Ra80
Input: 100V-240V AC
Current: Constant 300mA
Frequency: 50/60Hz
Watt: 1W per lamp

Life span: 50,000hrs Operating temp: -20°C-+40°C

Indoor use only

IP20

Dimmable: NO

Cautions: a.Installed by qualified electrician b.Use only power-supply supplied by manufacturer for products guarantee