




PROJECT

TYPE

NOTES

QUANTITY


DATE

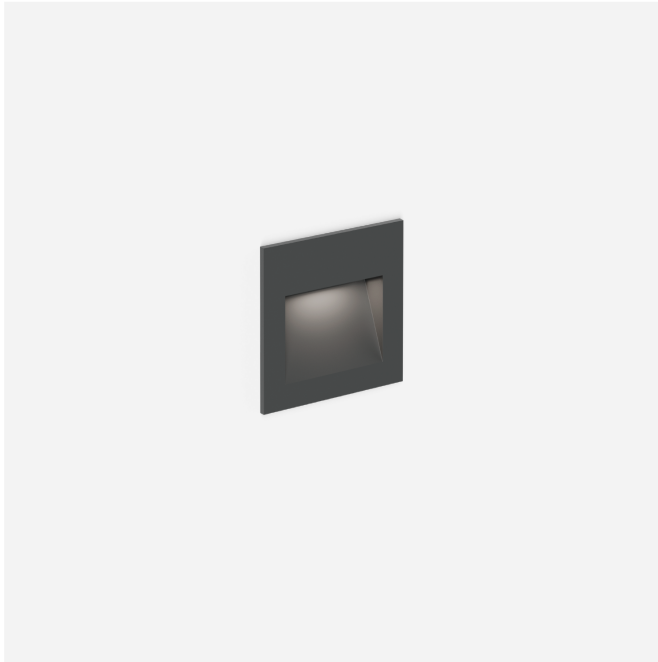

IP65



Rectangular wall recessed luminaire made from aluminium; surface Anthracite Grey; powder coated; matt texture; RAL 7016; recessed depth 40 mm; suitable for ceiling thickness of min. 12 mm; PCB 3-step binning; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; degree of protection IP65; Class 3; driver not included; light source not replaceable;



GENERAL

Wall
Recessed
Anthracite Grey
RAL 7016 ^a
IP65
Exterior
CIE flux code: 41 77 91 85 100

OUTPUT

700mA
75 lm
5.7 W

350mA
44 lm
2.7 W

LED

3000 K
CRI ≥ 90
L70 / 60000h
initial MacAdam ≤ 3 SDCM

OPTICAL

Asymetric

ELECTRICAL

excl. driver
6 V
inset 2.0 / 4.3 W
Class 3

PHYSICAL



length 80 mm
width 33 mm
height 80 mm
0.16 kg

CUTOUT

length 66 mm
width 66 mm
min. ceiling thickness 12 mm
recessed depth 40 mm

^a Colour may deviate slightly due to production conditions.

LIGHT DISTRIBUTION





MOUNTING ACCESSORIES

Concrete Housing

Type	Colour	Voltage	L·W·H (MM)	Item number
ORIS 0.8 RETO 0.8			69-69-61	90012046

Recessed Housing incl. plasterkit

Type	Colour	Voltage	L·W·H (MM)	Item number
ORIS 0.8 RETO 0.8			109-109-74	90012047

ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
3W 350 mA 3-15V IP66		3-15V	52-30-23	90213101
7W 500mA 5-14.5V IP67		5-14.5V	57-41-24	90214301
7W 700mA 3-10.5V IP67		3-10,5V	57-41-24	90215301