




PROJECT

TYPE

NOTES

QUANTITY


DATE

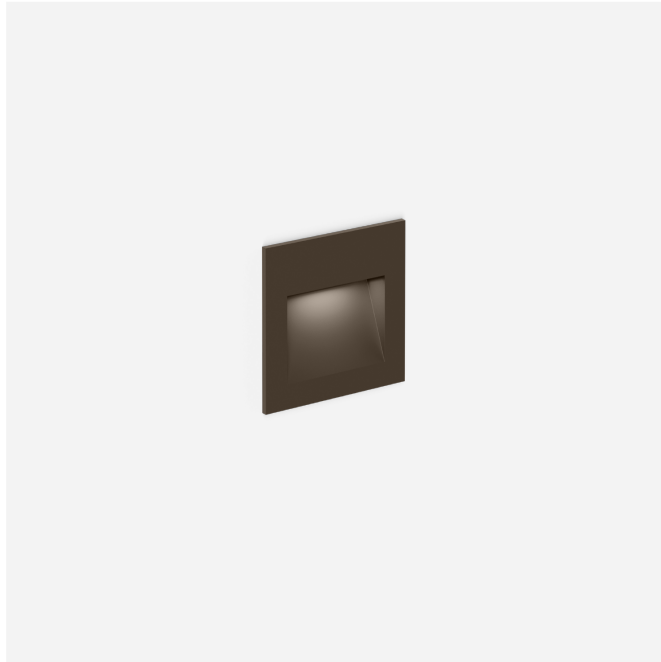

IP65



Rectangular wall recessed luminaire made from aluminium; surface Bronze; powder coated; matt texture; RAL 075 30 10; recessed depth 40 mm; suitable for ceiling thickness of min. 12 mm; PCB 3-step binning; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; degree of protection IP65; Class 3; driver not included; light source not replaceable;



GENERAL

Wall	
Recessed	
Bronze	
RAL 075 30 10 ^a	
IP65	
Exterior	
CIE flux code: 41 77 91 85 100	

LED

3000 K	
CRI ≥ 90	
L70 / 60000h	
initial MacAdam ≤ 3 SDCM	

OPTICAL

Asymetric	
-----------	--

ELECTRICAL

excl. driver	
6 V	
inset 2.0 / 4.3 W	
Class 3	

PHYSICAL

length 80 mm	
width 33 mm	
height 80 mm	
0.16 kg	

CUTOUT



length 66 mm	
width 66 mm	
min. ceiling thickness 12 mm	
recessed depth 40 mm	

^a Colour may deviate slightly due to production conditions.

OUTPUT

350mA	
44 lm	
2.7 W	
700mA	
75 lm	
5.7 W	

LIGHT DISTRIBUTION





MOUNTING ACCESSORIES

Concrete Housing

Type	Colour	Voltage	L·W·H (MM)	Item number
ORIS 0.8 RETO 0.8			69-69-61	90012046

Recessed Housing incl. plasterkit

Type	Colour	Voltage	L·W·H (MM)	Item number
ORIS 0.8 RETO 0.8			109-109-74	90012047

ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
3W 350 mA 3-15V IP66		3-15V	52-30-23	90213101
7W 500mA 5-14.5V IP67		5-14.5V	57-41-24	90214301
7W 700mA 3-10.5V IP67		3-10,5V	57-41-24	90215301