

FUGA

TRACK LIGHTING

AVAILABLE IN

Mounting

3-phase



Fixture options


Emergency unit



Lumen output	200lm
CCT	4000K
Autonomy	1h emergency
Charge time	24h

FIXTURE SPECIFICATIONS

 [View product on website](#)

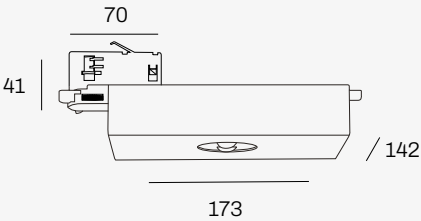

Fixture weight: 985 grams



Housing material	Aluminium
Material finish	Powder coating
RAL colour	9004 (Black) • 9003 (White)
Fixture type	3-phase track light
LED Module	Osram 3030
Driver	200mA LED driver
Adapter	Powergear 3-circuit track adapter
Number of light sources	1
Adjustability	N/A
Battery	Ni-Cd 3.2V/1500mA
Version	Non-maintained / manual testing
Lens	2x LedLink Optics LL01CR
Light direction	Straight 180° • Cross 90°
Power factor	> 0.9
Warranty	3 years on fixture (battery excluded)

FIXTURE

VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Osram 3030	200lm	940	67	3.0W	N/A

Fixture variations:

¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)

²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.

³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.

⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

ARTICLE CODE

CONFIGURATOR

IN

FIXTURE COLOUR

Article code configurator:

¹⁾ This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome

POLAR

DIAGRAMS

