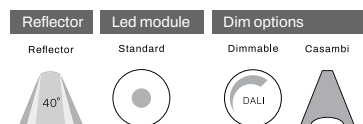


## SALINA 48V


### 48V TRACK LIGHTING

AVAILABLE IN

 made in  
**HOLLAND**


Lumen output	300lm
CRI	>90Ra
CCT	2700K • 3000K

## FIXTURE SPECIFICATIONS

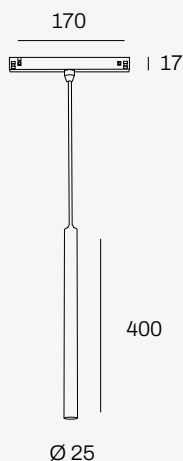[View product on website](#)


Fixture weight: 550 grams  
 Suspension: 300cm



Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9005 (Black) • 9016 (White) • 1036 (Gold)
Fixture type	48V low voltage track light
LED Module	Bridgelux V4 HD LED
Driver	Powergear 48V in-track adapter
Number of light sources	1
Adjustability	Fixed
IP rating	IP20
Expected lifetime	L90 / B10 @ 70.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	3 years on LED module and driver

FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Bridgelux V4 HD LED	300lm	927	43	7.0W	DALI / Casambi
Bridgelux V4 HD LED	300lm	930	43	7.0W	DALI / Casambi

Fixture variations:

<sup>1)</sup> Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)

<sup>2)</sup> Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.

<sup>3)</sup> Fixture efficiency is displayed in lumens per watt and is calculated based on the gross lumen output and power consumption of both the LED module and driver

<sup>4)</sup> Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting without prior notice.

POLAR DIAGRAMS

