SINCE 1978

LEADING LIGHT

Product Datasheet

vkleadinglight.gr

Poc

VK/04435/W/C/68

Recessed ceiling light led, 6W, 4000K, 382lm, 24°, CRI>90, IP44, ø6.8x5.1cm, white

IP44

Dimensions	Gallery	Downloads
		FILES FOTO CE

Led Downlights waterproof IP42/IP44

Poc

VK04435/W/C/68 VK04435/B/C/68 VK04435/G/C/68 VK04435/R/C/68

6W	4000K	382lm	24°	90	120hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	3000K	382lm	24°	90	120hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	4000K	382lm	24°	90	120hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	3000K	382lm	24°	90	120hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	4000K	382lm	24°	90	500hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	3000K	382lm	24°	90	500hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	4000K	382lm	24°	90	500hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	3000K	382lm	24°	90	500hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	4000K	382lm	24°	90	1000hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	3000K	382lm	24°	90	1000hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	4000K	382lm	24°	90	1000hrs	15°	50/60	68x51	68x51	68x51	68x51
6W	3000K	382lm	24°	90	1000hrs	15°	50/60	68x51	68x51	68x51	68x51

2W

VK Leading Light

Since 1978

Technical Specifications	
Kelvin	4000K
Power	6W
Voltage	220-240V
Fitting	Recessed ceiling
Type	Downlight LED
Safety class	⏚
Light source	Bridgelux COB
IP Rating	**IP44**
CRI	CRI>90
Dimmable	
Lifetime	20.000hrs
Driver	Built-in DC 20-42V 150mA
Working temperature	<45°C
PAGE	244 Technical 2024
NICKNAME	Poc

Physical Specifications	
Recessed ceiling	Yes
Color	White sand
Material	Aluminium
Width	ø6.8cm
Length	ø6.8cm
Height	5.1cm
Net weight of product (kg)	0.24
Gross weight with inner box (kg)	0.27
Gross weight with master box (kg)	8.60
Cut out	ø6cm H5.1cm (the cut hole also fits the light driver)

VK Leading Light
Since 1978

Illumination Data	
Lumen	382lm
Beam angle	24°
Lighting direction	

Packing Info	
Pcs/carton	30pcs

Certification & Warranty	
Guarantee	3 years

Energy Label

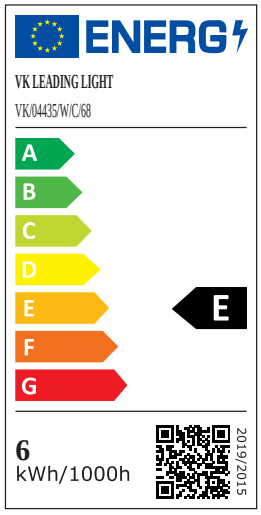

VK Leading Light
Since 1978