


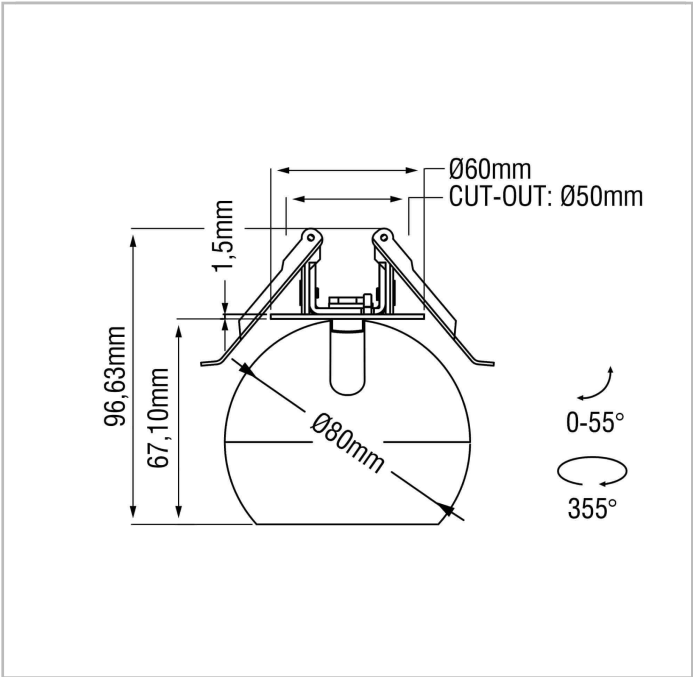

SKU
Housing Material
Housing Colour
Luminaire Dimension [mm]
Cut-Out [mm]
Optic
Reflector Colour
Beam Angle [deg]
System Power [W]
Luminous Flux [lm]
System Efficiency [lm/W]
Light Source
CCT [K]
CRI [Ra]
Chromaticity Tolerance
Mains Voltage [VAc]
Power Supply
Ambient Temperature [degC]
Ingress Protection
Light Source Energy Class
Light Source Identifier

: 146DB92740GOF0
: Aluminum Die Cast
: Black (RAL 9005)
: Ø80mm
: Ø50mm
: Reflector
: Gold
: 40°
: 10.5W
: 790lm
: 75lm/W
: 927 (2700K / CRI90)
: 2700K
: 90
: 3 MacAdam
: 220-240V / 50-60Hz
: Included ON/OFF
: 35°C
: IP20
: F
: CLU028-1204C4-273H5M3-F1

Lifetime/Failure Rate [h]	: 50000h
Electrical Safety Class	: Class II
Net Weight [Kg]	: 0.45Kg
Certificates/Declarations	: CE/UKCA
Warranty [Y]	: 5Y

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K.
Technical data can change without prior notice.