


General info

Technical - Recessed

Indoor ceiling recessed projector with integrated LED sources and direct light emission

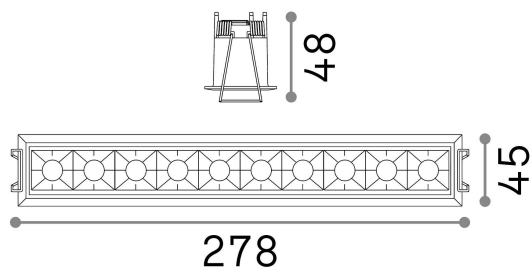

Ean	8021696267883
Item	LIKA FI TRIM 20W 4000K
Installation	Recessed (Ceiling, Wall)
Guarantee	5 years
Gross weight	0.63 kg
Volume	0.001556 m ³

Technical info

Net weight	0.48 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Recessed specifications	273 x 37 - h. ≥ 70 , 3-30
Accessories not included	Dimmable driver

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	20 W
Emission	Direct
Max consumption	max 19,5 W
Features LED	LED SMD OSRAM
CCT	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	-
Light beam	29°
UGR Maximum	< 16
Light beam flux	1850 lm
Useful light flux	1650 lm
Photobiological risk	2
Standby power	< 0.50 W