


01. SWITCH OFF MAIN
02. MAKE HOLE PATTERN
03. INSTALL THE BASE PLATE
04. CONNECT LAMP TO THE MAIN
05. DRIVE IN THE SCREWS UNTILL TIGHT
06. SWITCH ON THE MAIN AND LIGHT ON

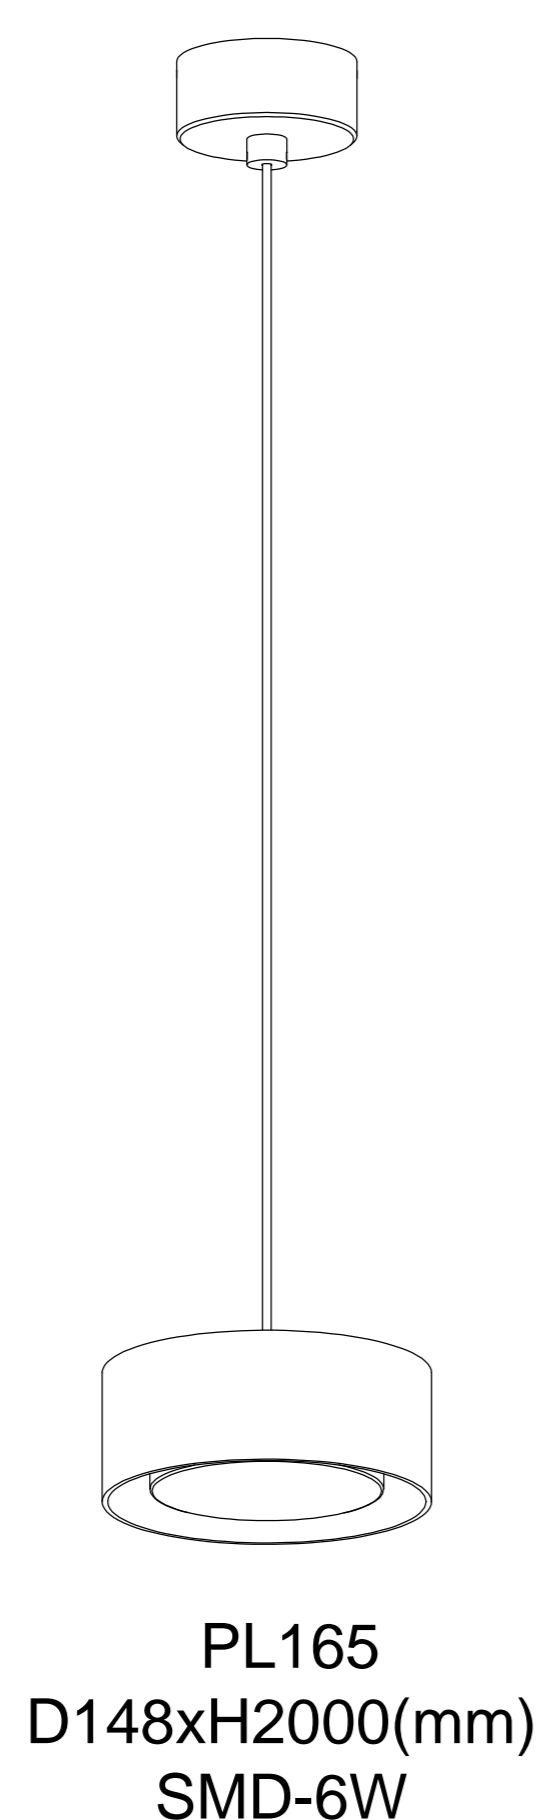

Lamp: SMD 2835 LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra80
 Input: 100V-240V AC
 Current: Constant 300mA
 Frequency: 50/60Hz
 Watt: 6W
 Life span: 20,000hrs
 Operating temp: -20°C--+40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied by manufacturer for products guarantee