

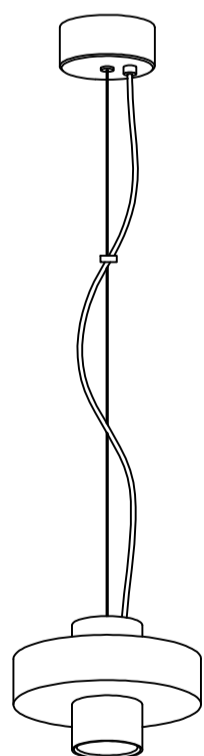






1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. ADJUST BEAMING
7. SWITCH ON THE MAIN AND LIGHT ON



PL348
D160xH2000(mm)
LED-5W

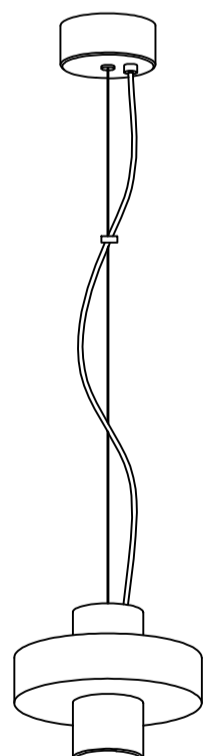

PL349
D160xH2000(mm)
LED-5W

Lamp: CREE COB LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra90
 Input: 100V-240V AC
 Current: Constant 500mA
 Frequency: 50/60Hz
 Watt: 5W
 Life span: 20,000hrs
 Operating temp: -20°C - +40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied by manufacturer for products guarantee