
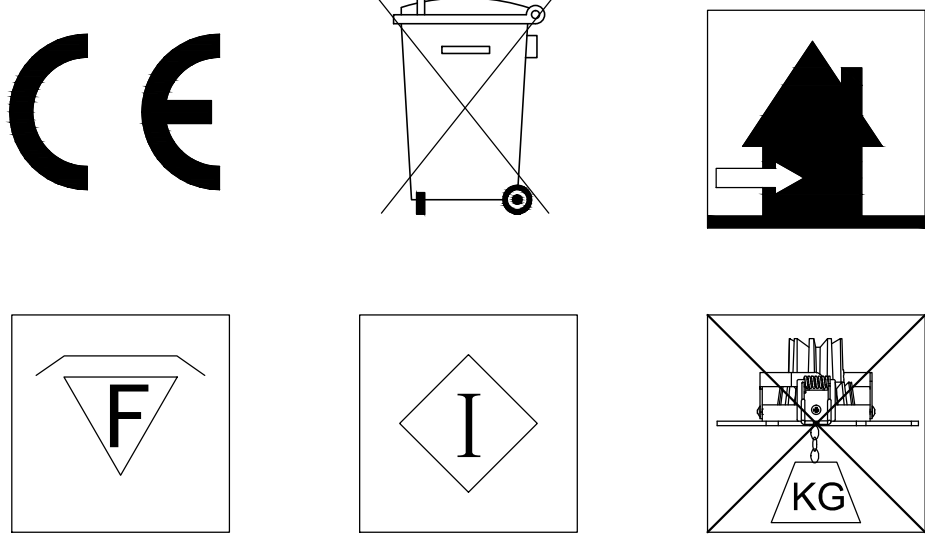
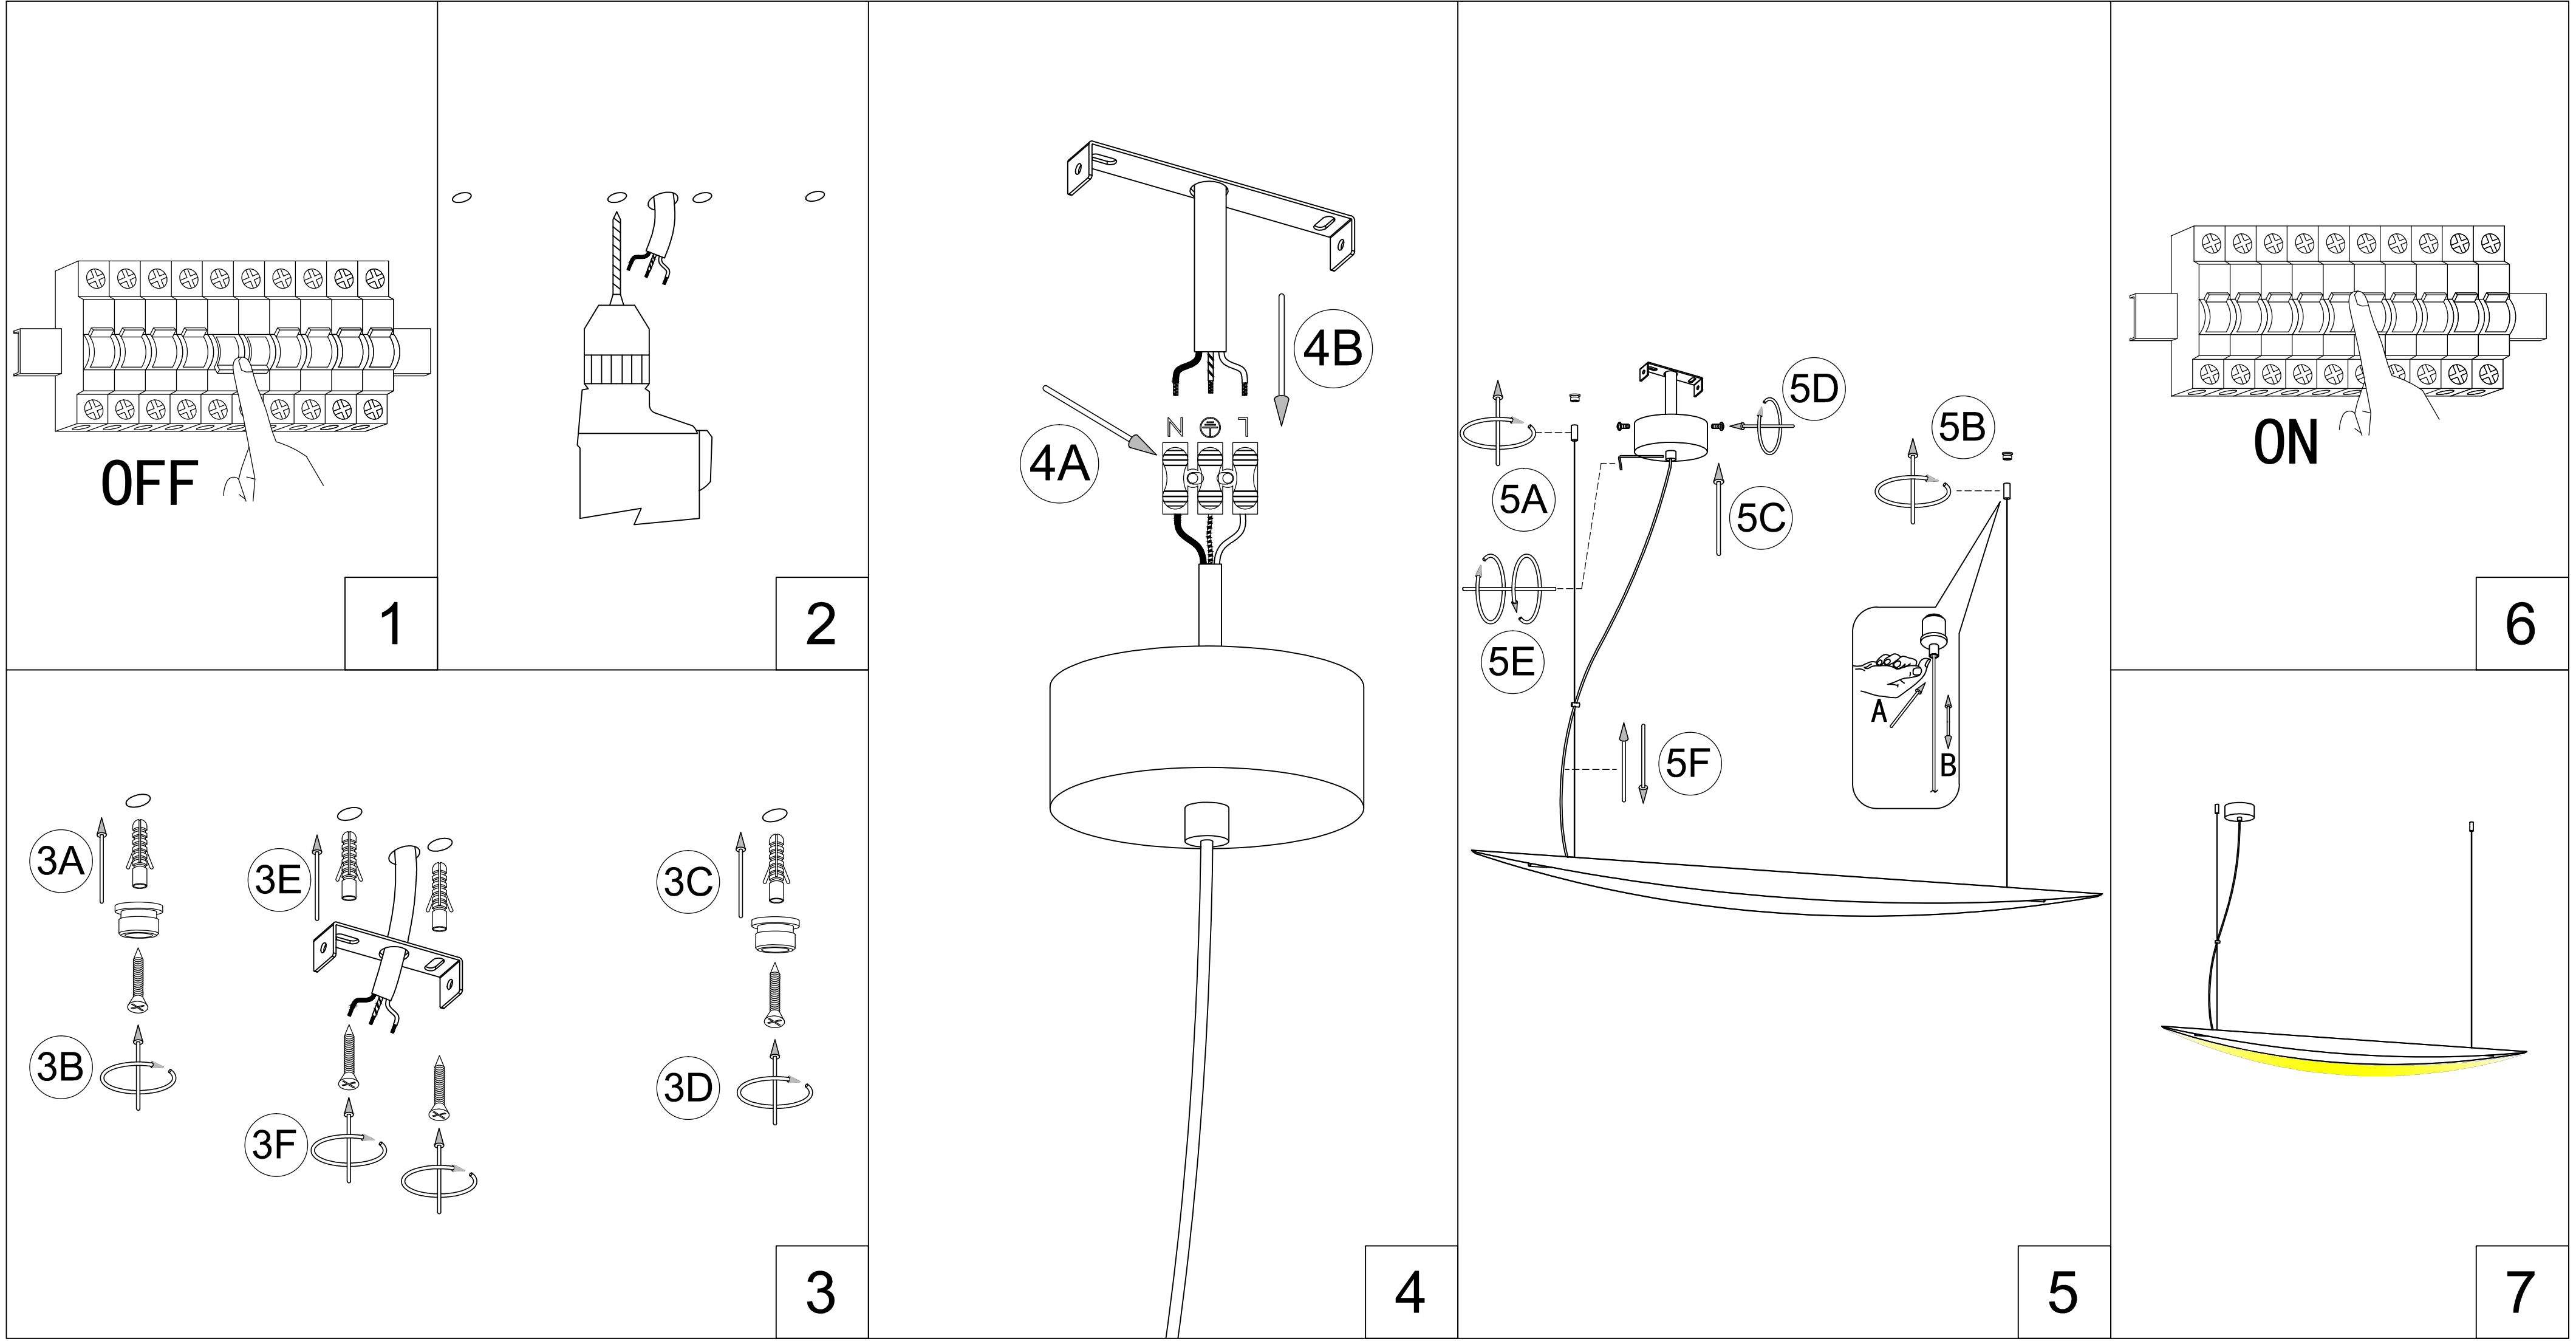













PL391 PL392 PL394
PL395 PL357 PL397

USER MANUAL
LED PENDANTS



Accessories	Accessories	Accessories	Accessories
 2mm Allen Key	 expansion plug 2pcs  screw 2pcs	 expansion plug 2pcs  screw 2pcs	 connector 3pcs

- 01.SWITCH OFF MAIN
02.MAKE HOLE PATTERN
03.INSTALL THE BASE PLATE
04.CONNECT LAMP TO THE MAIN
05.DRIVE IN THE SCREWS UNTILL TIGHT
06.ADJUST BEAMING
07.SWITCH ON THE MAIN AND LIGHT ON

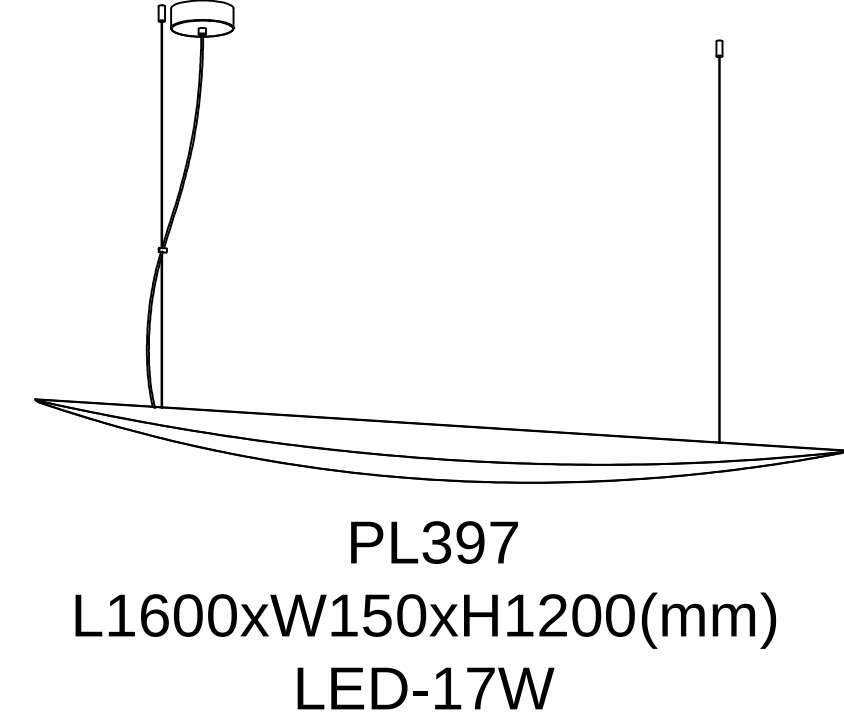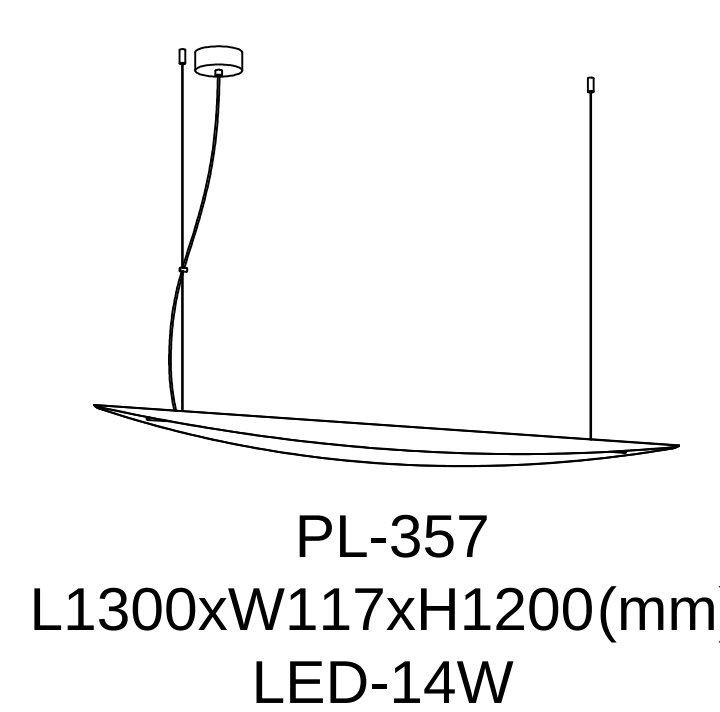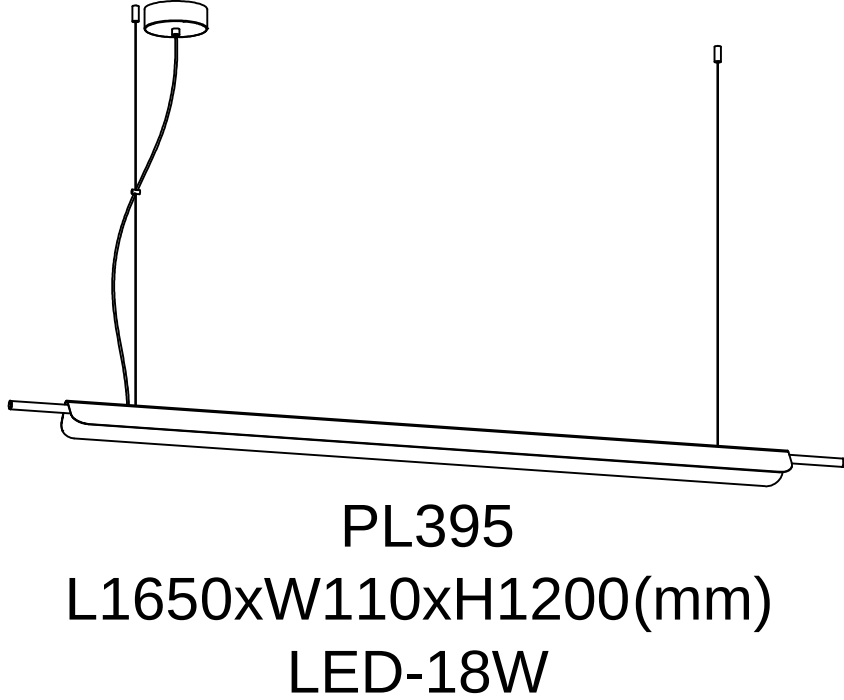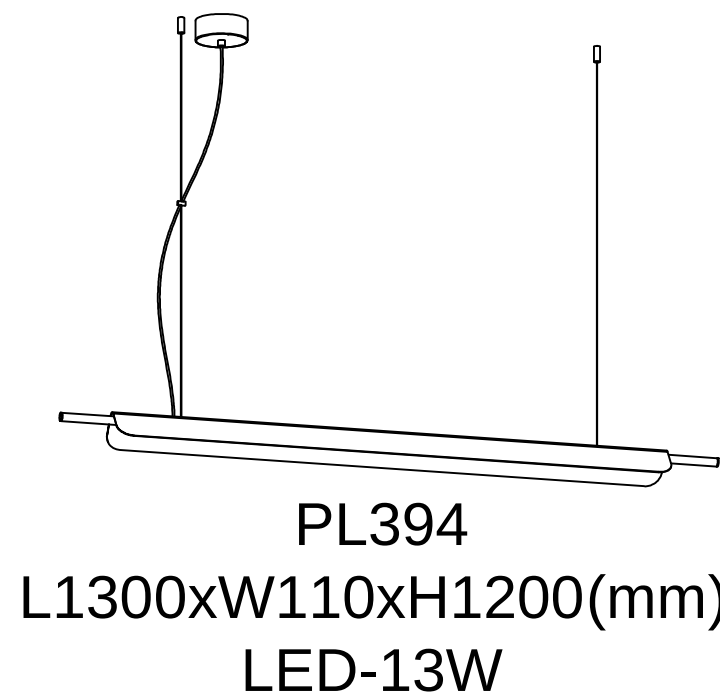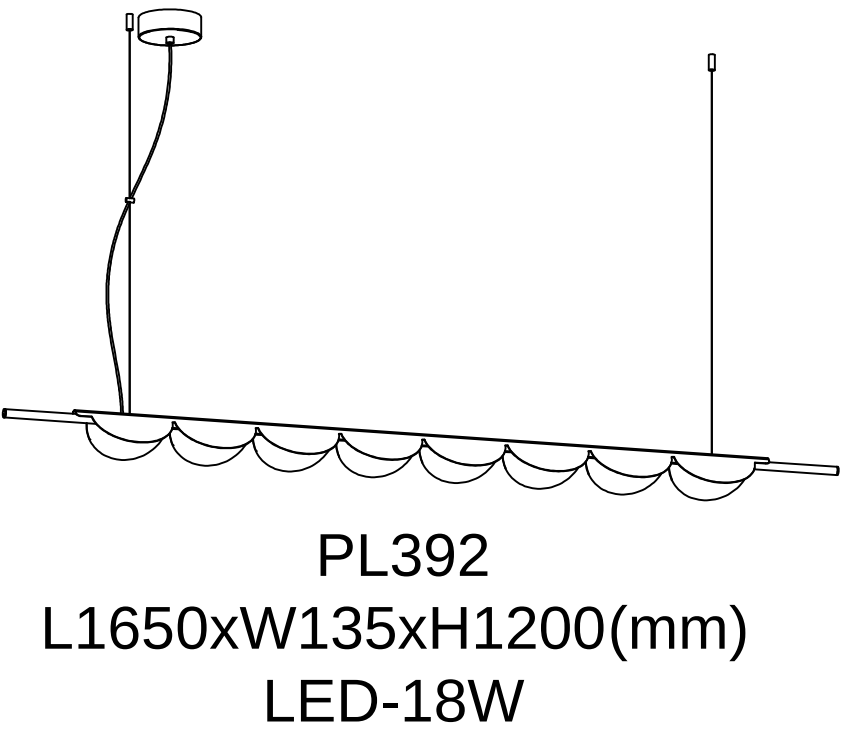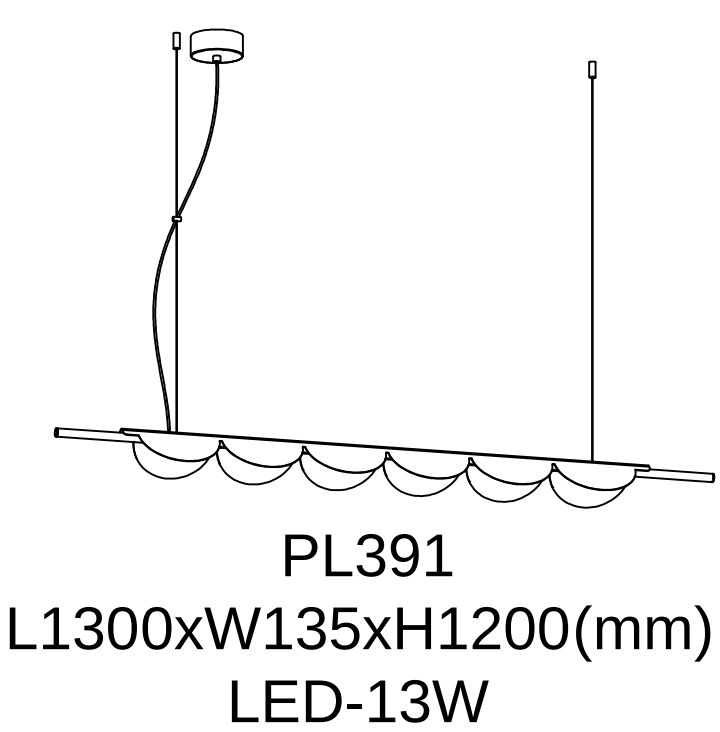

Lamp : SMD-2835 LED
Color : 2700K/3000K/4000K/6000K
Color rendering : Ra80
Input : 220V-240V AC
Current : Constant 300mA
Frequency : 50/60Hz
Watt : 13W/14W/17W/18W
Life span : 20,000hrs
Operating temp : -20℃ -+40℃
Indoor use only
IP20
Dimmable : NO

Cautions: a.Installed by qualified electrician
b.Use only power-supply supplied
by manufacturer for products guarantee